



2021
▼
2022



SOHO and SMB Solutions

Product Catalog



Your Premier Partner Since 1979


Since 1979, ATEN's success has been anchored upon our dedication to AV/IT technologies and our commitment to sustained innovation and achieving excellence, all fueled by a passion for bringing better connectivity to the world. We will continue to enjoy a solid base of market diversity, geographical expansion, and numerous achievements in alliance with our highly respected clients and partners.

As an accelerator for the integration of AV and IT technologies, ATEN works consistently to create secure, efficient, and productive IP-based AV networking and IT control solutions. Offering integrated KVM, professional AV, and intelligent power solutions, ATEN products connect, manage, and optimize AV/IT equipment in corporate, government, education, broadcasting and media, and transportation environments.



ATEN Product Portfolio

- ATEN's Altusen™ Enterprise Solutions for IT infrastructure access and management offer integrated KVM connectivity and control capabilities for customers to facilitate the effective management of IT infrastructures from anywhere in the world.
- ATEN's VanCryst™ Professional AV Solutions leverage our enhanced video and control capabilities and offer signal management and system control components to build a multitude of flexible integrated solutions for all professional audio/video-related applications.
- ATEN's SOHO/SMB Solutions invite you to experience the very latest standards in USB connectivity, mobility, and speed while embracing the next generation of 4K-enabled workstation solutions.
- ATEN's NRGence™ Energy Intelligence solutions offer sensor-enabled, energy-saving hardware and software for data centers that provide real-time energy management and performance indicators.

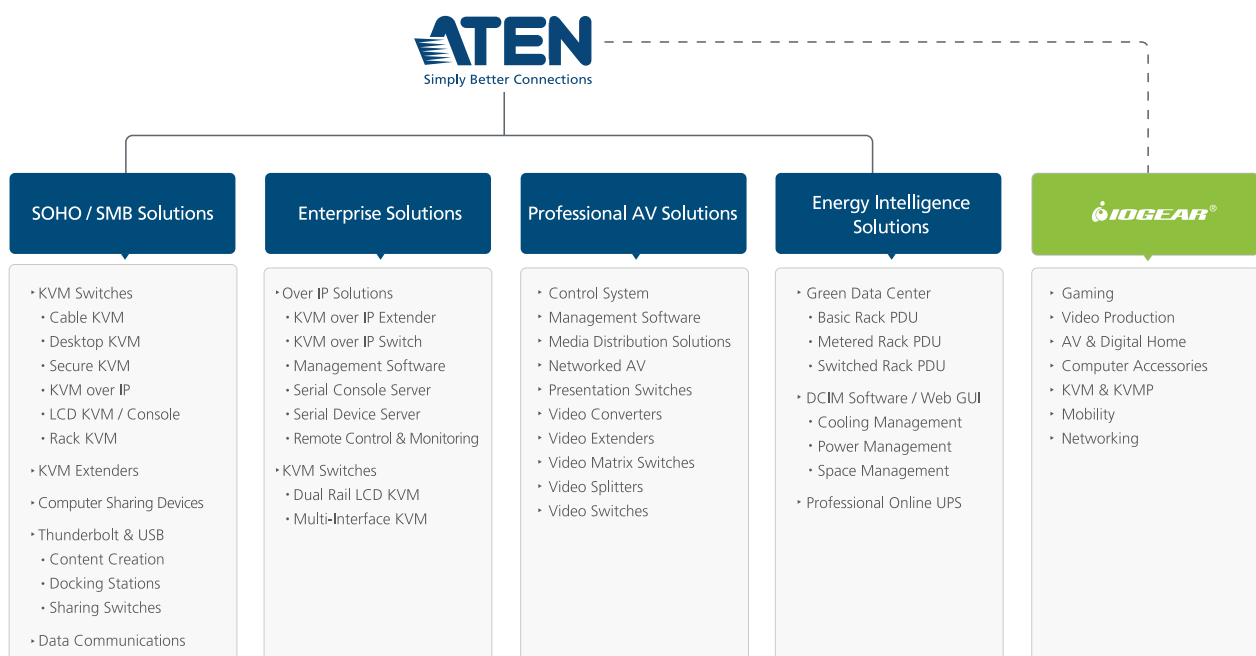

Contents

Introduction	I III IV	Company Profile Basic KVM Innovative Technology from ATEN	
Rack KVM Switches	1-3 1-5 1-7 1-9 1-11 1-13 1-14 1-15	8/16-Port USB 3.0 4K DisplayPort KVM Switch 8/16-Port USB 3.0 4K HDMI KVM Switch 8/16-Port USB HDMI/Audio KVM Switch 8-Port USB DVI Dual Link/Audio KVM Switch 8-Port USB DVI/Audio KVM Switch 4/8-Port PS/2-USB VGA/Audio KVM Switch 8/16-Port PS/2-USB VGA KVM Switch with Daisy-Chain Port and USB Peripheral Support 8/16-Port PS/2-USB VGA KVM Switch	CS19208 / CS19216 CS18208 / CS18216 CS1798 / CS17916 CS1788 CS1768 CS1754 / CS1758 CS1708A / CS1716A CS1308 / CS1316
KVM over IP Switches	2-3 2-4 2-5 2-6 2-7 2-8	1-Local/Remote Share Access Single Port 4K DisplayPort KVM over IP Switch / 1-Local/Remote Share Access Single Port DisplayPort KVM over IP Switch 1-Local/Remote Share Access Single Port DVI KVM over IP Switch 1-Local/Remote Share Access Single Port VGA KVM over IP Switch 1-Local/Remote Share Access Single Port DVI KVM over IP Switch (1920 x 1200) 1-Local/Remote Share Access Single Port VGA KVM over IP Switch (1920 x 1200) 1-Local/Remote Share Access 8/16-Port PS/2-USB VGA KVM over IP Switch	CN9950 / CN9900 CN9600 CN9000 CN8600 CN8000A CS1708i / CS1716i
Secure KVM Switches	3-2 3-5	2/4/8-Port USB DVI/HDMI/DisplayPort Single/Dual Display Secure KVM Switch Secure KVM Accessories	PSS PP v3.0 Secure KVM Switch Series
LCD KVM Switches	4-5 4-7 4-9 4-10 4-11 4-12 4-13 4-14 4-15 4-16 4-17 4-18 4-19 4-21 4-22 4-23	4-Port USB HDMI Multi-View Dual Rail WideScreen LCD KVM Switch 1-Local/Remote Share Access 8/16-Port PS/2-USB VGA Single Rail LCD KVM over IP Switch Ultra Short Depth Dual Rail WideScreen LCD Console (USB, HDMI / DVI / VGA) Ultra Short Depth Single Rail WideScreen LCD Console (USB, HDMI) Ultra Short Depth Single Rail WideScreen LCD Console (USB, VGA) Single Rail LCD Console (USB, HDMI / DVI / VGA) Lightweight Single Rail LCD Console (PS/2-USB, VGA) Dual Rail LCD Console (PS/2-USB, VGA) Single Rail LCD Console (PS/2-USB, VGA) 8/16-Port PS/2-USB VGA Single Rail WideScreen LCD KVM Switch 8/16-Port PS/2-USB VGA Single Rail LCD KVM Switch 8-Port USB DVI Single Rail WideScreen LCD KVM Switch 8/16-Port PS/2-USB VGA Single Rail LCD KVM Switch 8/16-Port PS/2-USB VGA Dual Rail LCD KVM Switch 8/16-Port PS/2-USB VGA Single Rail LCD KVM Switch Optional Rack Mount Kits	CL3884NW CL5708I / CL5716I CL3800 CL3700 CL3100 CL6700 CL3000 CL5800 CL1000 CL3108 / CL3116 CL1308 / CL1316 CL6708 CL5708 / CL5716 CL5808 / CL5816 CL1008 / CL1016
KVM Extenders	5-5 5-6 5-7 5-8 5-9 5-10 5-11	HDBaseT™ USB DisplayPort Dual View HDBaseT 2.0 KVM Extender USB DisplayPort HDBaseT 2.0 KVM Extender (4K@100m) USB HDMI HDBaseT 2.0 KVM Extender (4K@100m) USB DVI Dual View HDBaseT 2.0 KVM Extender (1920 x 1200@100m) USB DVI HDBaseT 2.0 KVM Extender (Long Reach mode up to 1920 x 1080@150m) Mini USB DVI HDBaseT KVM Extender (1920 x 1200@100m) USB DVI HDBaseT KVM Extender with ExtremeUSB® (1920 x 1200@100m)	CE924 CE920 CE820 CE624 CE620 CE611 CE610A

Contents

KVM Extenders		
	Fiber Optic	
5-13	USB DVI Optical KVM Extender (1920 x 1200@600m) / (1920 x 1200@20km)	CE680 / CE690
	Cat 5 / Cat 6	
5-15	USB DVI Dual View Cat 5 KVM Extender (1024 x 768@60m)	CE604
5-16	USB DVI Cat 5 KVM Extender / USB DVI Dual Link Cat 5 KVM Extender (1024 x 768@60m)	CE600 / CE602
5-17	USB VGA/Audio Cat 5 KVM Extender with USB Flash Storage (1024 x 768@250m)	CE800B
5-18	USB VGA Dual View Cat 5 KVM Extender (1600 x 1200@150m) / USB VGA Dual View Cat 5 KVM Extender with Deskew (1280 x 1024@300m)	CE774 / CE775
5-19	USB VGA/Audio Cat 5 KVM Extender with Deskew (1280 x 1024@300m)	CE770
5-20	USB VGA/Audio Cat 5 KVM Extender (1280 x 1024@200m)	CE750A
5-21	USB VGA Cat 5 KVM Extender (1280 x 1024@150m)	CE700A
5-22	USB VGA Cat 5 Mini KVM Extender (1280 x 1024@100m)	CE100
5-23	PS/2 VGA/Audio Cat 5 KVM Extender (1600 x 1200@150m) / PS/2 VGA/Audio Cat 5 KVM Extender with Deskew (1280 x 1024@300m)	CE350 / CE370
5-24	PS/2 VGA Cat 5 KVM Extender (1280 x 1024@150m)	CE250A
5-25	305M HDBaseT SF/UTP Cat 6 Cable	2L-2910
5-27	305M Low Skew Cat 5e Cable	2L-2801
<hr/>		
Cable KVM Switches		
6-4	Laptop USB KVM Console Crash Cart Adapter	CV211
6-5	2-Port USB Boundless Cable KM Switch	CS62KM
6-6	2-Port USB DisplayPort Cable KVM Switch with Remote Port Selector	CS22DP
6-7	2-Port USB 4K HDMI Cable KVM Switch with Remote Port Selector	CS22H
6-8	2-Port USB HDMI/Audio Cable KVM Switch with Remote Port Selector	CS692
6-9	2-Port USB DVI/Audio Cable KVM Switch with Remote Port Selector	CS682
6-10	2-Port USB DVI Cable KVM Switch with Remote Port Selector	CS22D
6-11	2-Port USB VGA/Audio Cable KVM Switch	CS62U / CS62US
6-12	4-Port USB VGA/Audio Cable KVM Switch	CS64U / CS64US
6-13	2-Port USB VGA Cable KVM Switch with Remote Port Selector	CS22U
6-14	2-Port PS/2 USB VGA/Audio Cable KVM Switch with Remote Port Selector	CS52A
6-15	2-Port PS/2 VGA Cable KVM Switch	CS62S
6-16	2/4-Port PS/2 VGA/Audio Cable KVM Switch	CS62A / CS64A
<hr/>		
Desktop KVM Switches		
7-5	4-Port USB 4K HDMI Multi-View KVMP™ Switch	CM1284
7-7	4-Port USB DVI Multi-View KVMP™ Switch	CM1164A
7-9	4-Port USB Boundless KM Switch	CS724KM
7-10	3-Port USB-C DisplayPort Hybrid KVMP™ Switch	CS1953
7-11	4-Port USB 3.0 4K DisplayPort Triple Display KVMP™ Switch	CS1964
7-12	2/4-Port USB 3.0 4K DisplayPort Dual Display KVMP™ Switch	CS1942DP / CS1944DP
7-13	2/4-Port USB 3.0 4K DisplayPort MST KVMP™ Switch	CS1922M / CS1924M
7-14	2/4-Port USB 3.0 4K DisplayPort KVMP™ Switch	CS1922 / CS1924
7-15	2/4-Port USB 3.0 DisplayPort KVMP™ Switch	CS1912 / CS1914
7-16	2-Port USB DisplayPort/Audio KVM Switch (4K Supported)	CS782DP
7-17	2/4-Port USB 3.0 4K HDMI Dual Display KVMP™ Switch	CS1842 / CS1844
7-18	2/4-Port USB 3.0 4K HDMI KVMP™ Switch with Audio Mixer Mode	CS1822 / CS1824
7-19	2/4-Port USB HDMI/Audio KVMP™ Switch	CS1792 / CS1794
7-20	2/4-Port USB DVI Dual Link Dual Display/Audio KVMP™ Switch	CS1642A / CS1644A
7-21	2/4-Port USB DVI Dual Link/Audio KVMP™ Switch	CS1782A / CS1784A
7-23	2/4-Port USB DVI/Audio KVMP™ Switch	CS1762A / CS1764A
7-24	2-Port USB DVI/Audio Slim KVM Switch	CS72D
7-25	2/4-Port USB VGA Dual Display/Audio KVMP™ Switch	CS1742 / CS1744
7-26	2/4-Port PS/2-USB VGA/Audio KVMP™ Switch with OSD	CS1732B / CS1734B

Contents

Desktop KVM Switches	7-27 7-28 7-29 7-30 7-31	2/4-Port PS/2-USB VGA/Audio KVM™ Switch 2/4-Port PS/2-USB VGA KVM Switch 2/4-Port USB VGA/Audio KVM Switch 2/4-Port PS/2 VGA KVM Switch 4-Port PS/2 VGA Slim KVM Switch	CS1732A / CS1734A CS82U / CS84U CS72U / CS74U CS82A / CS84A CS74E
Computer Sharing Devices	8-1 8-2	USB DVI Computer Sharing Device USB VGA Computer Sharing Device	CS261 CS231
KVM Modules & Included Accessories	9-2 9-2 9-3	DisplayPort Console Converter PS/2 to USB Adapter (90 cm) PS/2 to USB Adapter with Mac support (30 cm)	CV190 UC10KM UC100KMA
Thunderbolt & USB		Contents Creation 10-5 StreamLIVE™ PRO (Multi-Channel AV Mixer) 10-7 StreamLIVE™ HD (Multi-Channel AV Mixer) 10-9 CAMLIVE™ + (HDMI to USB-C UVC Video Capture with PD3.0 Power Pass-Through) 10-11 CAMLIVE™ PRO (Dual HDMI to USB-C UVC Video Capture) 10-13 CAMLIVE™ (HDMI to USB-C UVC Video Capture) Docking Stations 10-15 USB-C Multiport Mini Dock with Power Pass-Through 10-16 USB-C Travel Dock with Power Pass-Through 10-17 USB-C 4K Ultra Mini Dock with Power Pass-Through 10-18 USB-C Multiport Mini Dock with Power Pass-Through 10-19 USB-C Multiport Dock with Power Pass-Through (13") 10-21 USB-C Multiport Dock with Power Pass-Through (15") 10-23 USB-C Multiport Dock with Power Charging 10-24 USB-C Dual-DisplayPort Mini Dock 10-25 USB-C Multiport Mini Dock 10-26 USB-C Dual-HDMI Mini Dock 10-27 Thunderbolt™ 3 Multiport Dock with Power Charging Docking Switches 10-29 2-Port USB-C Gen 1 Dock Switch with Power Pass-through 10-30 2-Port ThunderBolt™ 2 KVM Docking Station USB Converters 10-32 2.7 m USB-C to 4K HDMI Converter 10-32 USB-C to 4K HDMI Adapter 10-33 USB-C to VGA Adapter 10-33 USB to RS-422/485 Adapter 10-34 USB to RJ-45 (RS-232) Console Adapter 10-34 USB to RS-232 Adapter (35 cm) / USB to RS-232 Adapter (100 cm) 10-35 2/4-Port USB to RS-232/485/422 Hub 10-36 USB to IEEE1284 Printer Adapter (1.8 m) Peripheral Switches 10-37 2-Port USB-C Gen 2 Sharing Switch with Power Pass-through 10-38 4x4 USB 3.2 Gen 1 Industrial Hub Switch 10-39 2x4 / 4x4 USB 3.2 Gen 1 Peripheral Sharing Switch 10-40 2x4 / 4x4 USB 2.0 Peripheral Sharing Switch 10-41 2/4-Port USB 2.0 Peripheral Sharing Switch	UC9040 UC9020 UC3021 UC3022 UC3020 UH3239 UH3238 UH3235 UH3236 UH3234 UH3237 UH3230 UH3231 UH3232 UH3233 UH7230 US3310 US7220 UC3238 UC3008A1 UC3002A UC485 UC232B UC232A / UC232A1 UC2322 / UC2324 / UC4852 / UC4854 UC1284B US3342 US3344I US234 / US434 / US3324 / US3344 US224 / US424 US221A / US421A

Contents

Thunderbolt & USB		USB Extenders	
	10-42	10 m/15 m USB 3.2 Gen 1 Extender	UE3310 / UE3315A
	10-42	5 m USB 3.2 Gen 1 Extender	UE350A
	10-43	5 m USB 2.0 Extender (Daisy-chaining up to 25 m)	UE250
	10-43	5 m USB Extender (Daisy-chaining up to 25 m)	UE150
	10-44	12m USB 2.0 Extender (Daisy-chaining up to 60 m) / 12m 4-Port USB 2.0 Extender (Daisy-chaining up to 60 m)	UE2120 / UE2120H
	10-44	4-Port USB 2.0 Cat 5 Extender (100 m)	UCE32100
	10-45	USB 2.0 Cat 5 Extender (up to 60 m)	UCE260
	10-45	USB Cat 5 Extender (up to 60 m)	UCE60
	10-46	4-Port USB 2.0 Cat 5 Extender (up to 50 m)	UCE3250
	10-46	4-Port USB 2.0 Cat 5 Extender over LAN	UEH4102
	10-47	4-Port USB 2.0 Cat 5 Extender (up to 100 m)	UEH4002A
		USB Hubs	
	10-48	4-Port USB 2.0 Hub / 4-Port USB 2.0 Hub with Magnetic	UH275 / UH284
Data Communication			
	11-2	Non-Powered / High Speed Parallel Data Extender	IC164
	11-3	RS-232/RS-485 Interface Converter	IC485S / IC485SI / IC485SN
	11-4	RS-232 8-Port PCI Card	IC-1085
Reference			
Cables & Accessories	12-1		
Product Compatibility List	12-4		
Hotkeys	12-5		

Note: Product features and illustrations may have been updated since this catalog was printed. Please visit our website to obtain the latest information.

The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

Company Profile




Our Services for You

We help you satisfy all your customers' needs and grow your business.



Global Sales and Service Network

ATEN has a global network of sales and engineering professionals to provide our customers with fast, efficient, and comprehensive service. Our distribution channels and partners extend worldwide to more than 100 countries.




ATEN eNews

ATEN eNews is a monthly publication featuring the latest ATEN product developments, marketing and promotional resources, and corporate activities. Registered partners receive a monthly newsletter to stay up-to-date with ATEN's latest product news and events.



ATEN Download Center

As an ATEN partner, you are guaranteed to have all the tools, knowledge, and support you require to succeed. Authorized partners can access our intuitive information sharing platform to get the latest marketing materials, sales tools, technical documents, product certifications, and more. ATEN also provides integrated marketing programs and promotions to assist partners in promoting ATEN products and services.



ATEN Partner Portal


The ATEN Partner Portal is a web portal that is dedicated to Solution Partners, Channel Partners, and DMR Partners, and provides several ATEN online services, including technical support, product registration, and a wide range of unique partner services.

Basic KVM

What is a KVM Switch?

KVM stands for “Keyboard, Video, and Mouse”. A KVM switch allows you to control multiple computers from a single keyboard, monitor, and mouse (Console).

By using a KVM switch, you will save money on redundant hardware, consolidate desk space, and increase performance by having multiple computers working as one.

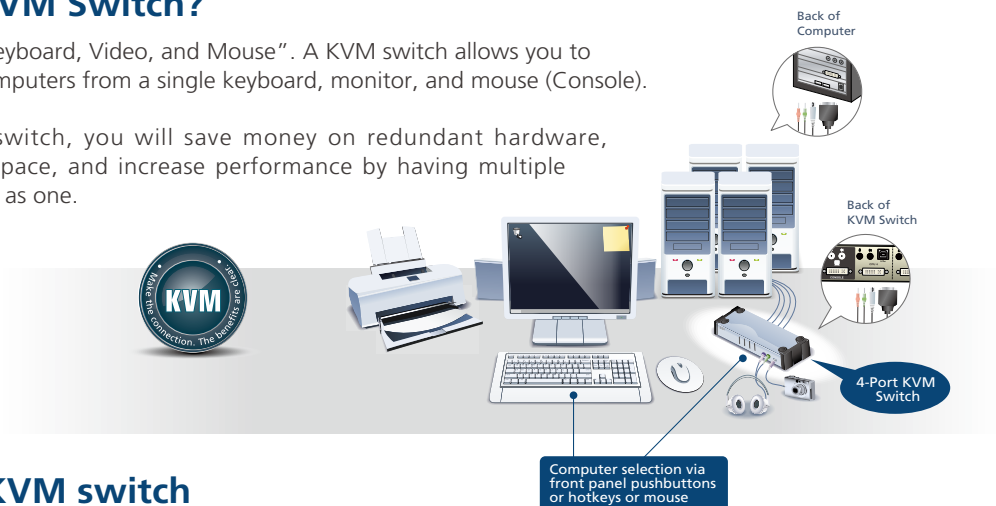

Advanced KVM switch

1. Managing Multiple Servers

Additional KVM switches can increase the overall capacity of your installation. There are two methods for expanding your KVM switch installation: cascading, and daisy-chaining.

Cascading


Cascading involves using the KVM port(s) of a “parent” KVM switch (one that is above a switch linked down from it) to connect to the console ports of a “child” KVM switch. With numerous child switches linked down from the parent, the effect is reminiscent of the way water cascades down a waterfall. Cascading adds capacity to a KVM installation, but the parent KVM switch loses at least one KVM port for each cascaded child switch.

Daisy-chaining


Daisy-chaining refers to connecting two KVM switches via dedicated daisy-chain ports. The switches are strung together in a chain, similar to the way children make chains of daisies by tying the end of one daisy to the head of another.

A daisy-chained installation does not utilize KVM ports or user ports to connect one switch to another as in a cascaded installation and thereby preserves the number of valuable ports. The port capacity of a daisy-chained installation is the total of all the KVM ports for all of the KVM switches on the chain.

Cascading

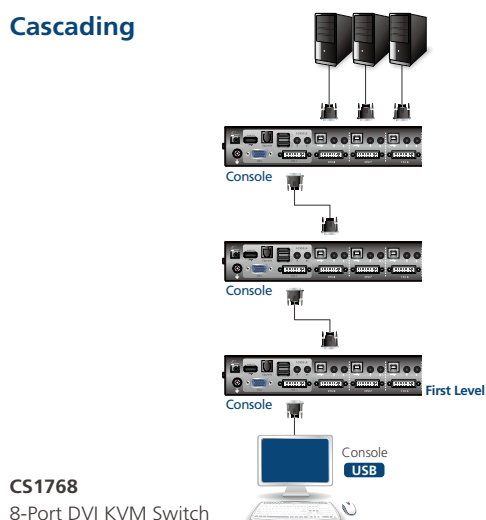

Daisy-chaining

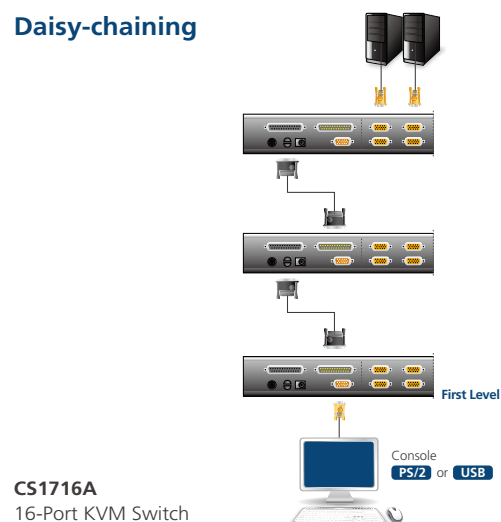

Innovative Technology from ATEN

- **All-in-One**

ATEN's patented all-in-one custom KVM cables were the first in the industry to offer such technology built directly into a KVM switch. The all-in-one design provides the perfect solution for accessing and sharing 2 or 4 computers in a SOHO or Digital Living Room environment. Its integrated design and small footprint allow it to be placed in a convenient, out-of-the-way location so that it doesn't negatively impact the room's decor.

Products: All Cable KVM Switches.

- **KVMP™**

KVMP™ is a patented ATEN technology that provides the industry's first full-functioning USB hub to be integrated into a KVM switch, allowing peripherals to be shared. KVMP™ provides centralized control of both computers and USB peripherals from a single console. KVMP™ switches are platform-independent and allow you to access different PCs while maintaining peripheral focus on the original computer.

Products: Most Desktop KVM Switches.

- **Video DynaSync™**

Video DynaSync™ is a patented ATEN technology that optimizes your KVM viewing experience. By storing the console monitor's EDID, boot-up display problems are eliminated and operation is smoother thanks to the switch's ability to automatically show the correct display resolution when switching between ports. Video DynaSync™ ensures that your ideal video settings are maintained under all operating systems and is compatible with any operating system.

Products: Most KVMP™, KVM and Cable KVM Switches.

- **Boundless Switching**

Boundless Switching is a patented ATEN technology that allows users to switch KVM focus between multiple computers by moving the mouse cursor across the display or window borders. The mouse cursor can be moved to another display / window in any direction and, depending on your display setup, will switch the KVM focus to that display.

Products: CM1284, CM1164A, CS724KM

- **Deskew**

ATEN's patented automatic delay line synchronizing function corrects the color phase and time errors that can occur when RGB video signals are sent long distances over Cat 5e/6 cables. ATEN's Deskew technology enables you to manually tune the RGB signal settings, ensuring stable, high-quality video in both KVM and video extender installations.

Products: CE775, CE770, CE370 KVM Extender.

- **Auto Switch**

The ATEN US221A / US421A has an Auto Switch function that stores commands sent to the USB peripheral device to be processed on a first-come, first-served basis. This patented technology means that a separate print server is not required in your multifunction printer / USB peripheral installation.

Products: US221A / US421A USB 2.0 Peripheral Switch.

- **Mouse DynaSync™**

Mouse DynaSync™ is a patented ATEN technology that represents the latest in KVM mouse synchronization. With USB mice and Mouse DynaSync™, your local console mouse movement actually becomes the remote unit's mouse movement. The Mouse DynaSync™ technology automatically locks in the local and remote mouse pointers so that you do not waste time re-syncing the two movements.

Products: CN9600, CN8000A, CN8600, CS1708i / CS1716i (as well as various KVM over IP Products), CL5708i / CL5716i

- **ATEN Exclusive Video Compensation Technology**

ATEN's patented exclusive video compensation technology permits video signals to be transmitted over long distances with enhanced accuracy. The innovative new technology improves on the previous design by minimizing inaccuracy from 10 m to only 1 m. This technology not only improves brightness, it also achieves high skew tolerance for our KVM extender products.

Products: CE350, CE370, CE100, CE770, CE774, CE775



Rack KVM Switches

1

Rack KVM Switches

Rack-mountable KVM switches are designed to meet the needs of moderate to large-sized business installations, streamlining PC and server management while easily accommodating upgrading and expansion. The series offers rack-mountable KVM switches ideal for server rooms, data centers, ISPs and test labs.



- **Flexible Expansion**

ATEN Rack KVM switches allow you to easily add up to 512 servers to your installation via cascade or daisy-chain topology.

- **Easy Access and Control**

ATEN Rack KVM Switches provide up to four methods to access and control all the servers on your installation: port selection pushbuttons on the switch, hotkey combinations from the keyboard, a menu-driven OSD (On Screen Display) system, and RS-232 commands (only on CS19208/CS19216 and CS18208/CS18216).

- **Strong Security**

To prevent unwanted access to your installation, ATEN Rack KVM Switches contain authentication and authorization procedures.

- **Dual Interface – Multi-Platform Support**

ATEN Rack KVM switches support optional custom cables or converters allowing PS/2 and USB interfaces on the same installation. The custom cables support any combination of Windows, Mac, Sun, or Linux systems to coexist and be integrated into the KVM switch management system.

- **Boost Management Efficiency**


ATEN Rack KVM Switches feature a dynamic Auto Scan function that automatically switches among user selected ports at user-specified intervals – allowing administrators to monitor rack KVM switch status.

- **Video DynaSync™**

Exclusive ATEN technology eliminates boot-up display problems and optimizes resolutions when switching among different sources.

Note:

The features highlighted above are not available in all products. Please refer to each product page for more details. Product information is subject to change without prior notice.

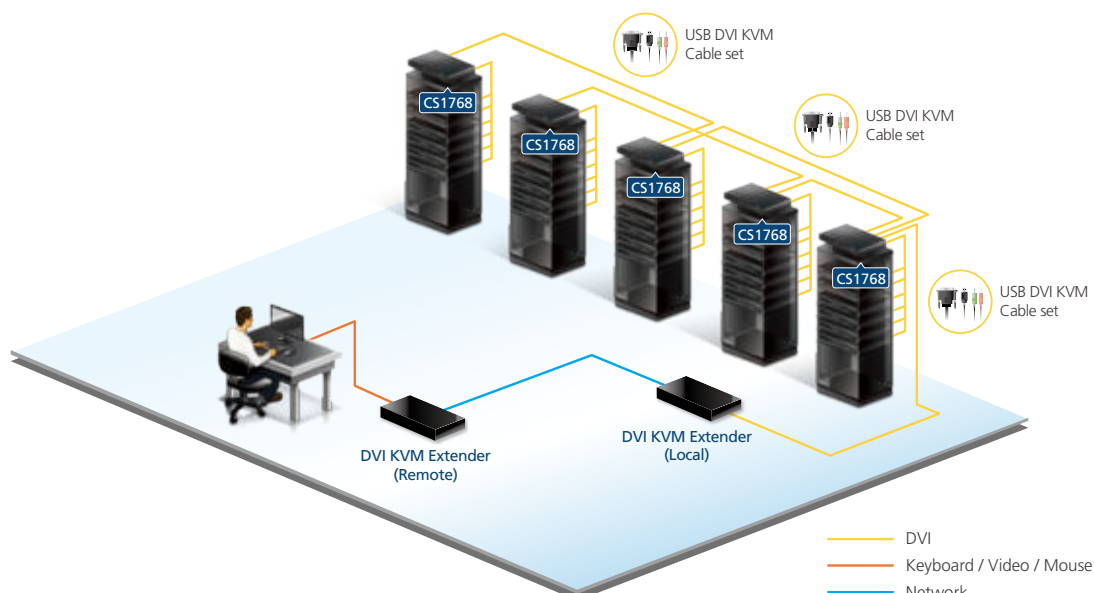

Feature Comparison


Model No.		CS19208	CS19216	CS18208	CS18216	CS1798	CS17916
Console Connections		1	1	1	1	1	1
Ports		8	16	8	16	8	16
Interface	Keyboard, Mouse	USB	USB	USB	USB	USB	USB
	Video	DisplayPort, HDMI	DisplayPort, HDMI	HDMI	HDMI	HDMI	HDMI
Expansion		128 (Cascade)	256 (Cascade)	512 (Cascade)	256 (Cascade)	512 (Cascade)	256 (Cascade)
Platform Support		Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun
Audio		• (Speakers)	• (Speakers)	• (Speakers)	• (Speakers)	• (Speakers)	• (Speakers)
USB Peripheral Port		• (USB 3.0)	• (USB 3.0)	• (USB 3.0)	• (USB 3.0)	•	•
Video DynaSync™		•	•	•	•	•	•
Port Selection		OSD, Hotkey, Pushbutton, RS-232 Commands	OSD, Hotkey, Pushbutton, RS-232 Commands	OSD, Hotkey, Pushbutton, RS-232 Commands	OSD, Hotkey, Pushbutton, RS-232 Commands	OSD, Hotkey, Pushbutton	OSD, Hotkey, Pushbutton

Model No.		CS1788	CS1768	CS1754	CS1758
Console Connections		1	1	1	1
Ports		8	8	4	8
Interface	Keyboard, Mouse	USB	USB	PS/2-USB	PS/2-USB
	Video	DVI (Dual Link), VGA	DVI, VGA	VGA	VGA
Expansion		512 (Cascade)	512 (Cascade)	64 (Cascade)	512 (Cascade)
Platform Support		Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun
Audio		•	•	•	•
USB Peripheral Port		•	•	N/A	N/A
Video DynaSync™		•	•	N/A	N/A
Port Selection		OSD, Hotkey, Pushbutton	OSD, Hotkey, Pushbutton	OSD, Hotkey, Pushbutton	OSD, Hotkey, Pushbutton

Model No.		CS1708A	CS1716A	CS1308	CS1316
Console Connections		1	1	1	1
Ports		8	16	8	16
Interface	Keyboard, Mouse	PS/2-USB	PS/2-USB	PS/2-USB	PS/2-USB
	Video	VGA (SPHD)	VGA (SPHD)	VGA (SPHD)	VGA (SPHD)
Expansion		256 (Daisy-chain)	512 (Daisy-chain)	64 (Cascade)	256 (Cascade)
Platform Support		Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun
Audio		N/A	N/A	N/A	N/A
USB Peripheral Port		•	•	N/A	N/A
Video DynaSync™		•	•	•	•
Port Selection		OSD, Hotkey, Pushbutton	OSD, Hotkey, Pushbutton	OSD, Hotkey, Pushbutton	OSD, Hotkey, Pushbutton

CS19208 / CS19216

8/16-Port USB 3.0 4K DisplayPort KVM Switch

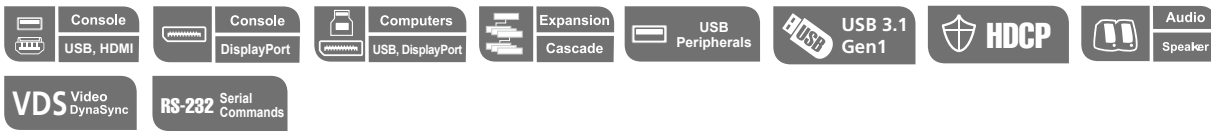

1

- CS19208



- CS19216



Front

- CS19208



- CS19216



Rear

- CS19208



- CS19216



Features

- Cascadable to two levels – controls up to 128/256 computers (CS19208/CS19216)¹
- Multi-Display feature – stack up to eight CS19208/CS19216 units and display video from up to 8 monitors (dual display / triple display / quad display / multi-display)
- [Video DynaSync™](#) – exclusive ATEN technology eliminates boot-up display problems and optimizes the resolution when switching among different sources
- Supports a DisplayPort or HDMI video output – allows you to choose an appropriate video output and deploy console with flexibility
- Supports superior video quality – up to 4K DCI (4096 x 2160 @ 60Hz)
- Built-in 2-port USB 3.1 Gen1 hub with SuperSpeed 5 Gbps data transfer rates
- Audio enabled – full bass response provides a rich experience for 2.1 channel stereo sound
- Supports HD Audio²
- Computer selection via pushbuttons, hotkeys, OSD, and RS-232 commands
- Independent switching of KVM and USB peripheral focus³
- Two-level (administrator/user) password authorization for enhanced security protection
- Broadcast mode – operations simultaneously performed on all selected computers, such as software installation and upgrading, system-wide shutdown, etc.
- Auto Scan Mode for monitoring all computers
- Console mouse port emulation/bypass feature – supports most mouse drivers and multifunction mice
- Mac/Sun keyboard support and emulation⁴
- Supports hot-plugging
- DisplayPort 1.2 compliant; HDCP 2.2 compliant
- Multiplatform support – Windows, Linux, Mac, and Sun
- Firmware upgradable
- Supports multimedia, wireless keyboard and mouse

Note: 1. Cascading between CS19208 and CS19216 is available.

2. HD audio through HDMI and DisplayPort cannot be switched independently.

3. Independent switching is only supported under mouse emulation mode.

4. PC keyboard combinations emulate Mac/Sun keyboards; Mac/Sun keyboards work only with their own computers.

Specifications

	CS19208	CS19216
Computer Connections		
Direct	8	16
Maximum	128 (via Cascade)	256 (via Cascade)
Connectors		
Console Ports	1 x DisplayPort Female 1 x HDMI Female (Black) 2 x USB Type A Female 2 x 3.5mm Audio Jack Female (Green; 1 x front, 1 x rear)	
KVM Ports	8 x DisplayPort Female 8 x USB 3.1 Gen1 Type B Female (Blue) 8 x 3.5mm Audio Jack Female (Green)	16 x DisplayPort Female 16 x USB 3.1 Gen1 Type B Female (Blue) 16 x 3.5mm Audio Jack Female (Green)
Firmware Upgrade	1 x RJ-11 Female	
Power	1 x DC Jack	
USB Hub	2 x USB 3.1 Gen1 Type A Female (Blue; 2 x front)	
Port Selection	OSD, Hotkey, Pushbutton, RS-232 commands	
Emulation		
Keyboard / Mouse	USB	
Video	DisplayPort: 4096 x 2160 @ 60Hz HDMI: 4096 x 2160 @ 60Hz	
LEDs		
On Line / Selected	8 (Orange)	16 (Orange)
USB Link	8 (Green)	16 (Green)
Power	1 (Green)	
Power Consumption	DC12V: 18.44W	DC12V: 26.66W
Environmental		
Operating Temperature	0 – 40°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal	
Weight	3.11 kg (6.85 lb)	3.54 kg (7.8 lb)
Dimensions (L x W x H)	43.24 x 21.43 x 4.40 cm (17.02 x 8.44 x 1.73 in.)	
Carton Lot	3 pcs	
Included Accessories	2x DisplayPort 1.4 Cables; 2x USB 3.0 Cables; 2x Audio Cables; 1x Firmware Upgrade Cable; 1x Foot Pad Set (4 pcs); 1x Power Adapter; 1x Mounting Kit	

Optional Accessories

Type	Part No. / Spec.	Page No.
DisplayPort Cables	2L-7D02DP (2 m), 2L-7D03DP-1 (3 m), 2L-7D04DP (4.6 m)	12-3
HDMI Cables	2L-7D01H (1 m), 2L-7D02H-1 (2 m), 2L-7D03H (3 m)	12-2
USB DisplayPort KVM Cable Kit	2L-7D02UDPX3	Please refer to www.aten.com for more details.
LockPro - HDMI Cable Lock	2X-EA12	12-4
2-in-1U Rack Mount Kits	2K-0001 2K-0002	4-24

CS18208 / CS18216

8/16-Port USB 3.0 4K HDMI KVM Switch



1

- CS18208



- CS18216



Front

- CS18208



- CS18216



Rear

- CS18208



- CS18216



Features

- Cascadable to three levels – controls up to 512 computers (CS18208)¹; or two levels – up to 256 computers (CS18216)
- Multi-Display feature – stack up to eight CS18208/CS18216 units and display video from up to 8 monitors (dual display / triple display / quad display / multi-display)
- [Video DynaSync™](#) – exclusive ATEN technology eliminates boot-up display problems and optimizes the resolution when switching among different sources
- Supports superior video quality – up to 4K DCI (4096 x 2160 @ 60Hz)
- Built-in 2-port USB 3.1 Gen 1 hub with SuperSpeed 5 Gbps data transfer rates
- Audio enabled – full bass response provides a rich experience for 2.1 channel stereo sound
- Supports HD Audio²
- Computer selection via pushbuttons, hotkeys, OSD, and RS-232 commands
- Independent switching of KVM and USB peripheral focus³
- Two-level (administrator/user) password authorization for enhanced security protection
- Broadcast mode – operations simultaneously performed on all selected computers, such as software installation and upgrading, system-wide shutdown, etc.
- Auto Scan Mode for monitoring all computers
- Console mouse port emulation/bypass feature – supports most mouse drivers and multifunction mice
- Mac/Sun keyboard support and emulation⁴
- Supports hot-plugging
- HDCP 2.2 compliant
- Multiplatform support – Windows, Linux, Mac, and Sun
- Firmware upgradable
- Supports multimedia, wireless keyboard and mouse

Note: 1. CS18208 cascades to CS18208 only.

2. HD audio through HDMI channel cannot be switched independently.

3. Independent switching is only supported under mouse emulation mode.

4. PC keyboard combinations emulate Mac/Sun keyboards; Mac/Sun keyboards work only with their own computers.

Specifications

	CS18208	CS18216
Computer Connections		
Direct	8	16
Maximum	512 (via Cascade)	256 (via Cascade)
Connectors		
Console Ports	1 x HDMI Female (Black) 2 x USB Type A Female 2 x 3.5mm Audio Jack Female (Green; 1 x front, 1 x rear)	
KVM Ports	8 x HDMI Female 8 x USB 3.1 Gen1 Type B Female (Blue) 8 x 3.5mm Audio Jack Female (Green)	16 x HDMI Female 16 x USB 3.1 Gen1 Type B Female (Blue) 16 x 3.5mm Audio Jack Female (Green)
Firmware Upgrade	1 x RJ-11 Female	
Power	1 x DC Jack	
USB Hub	2 x USB 3.1 Gen1 Type A Female (Blue; 2 x front)	
Port Selection	OSD, Hotkey, Pushbutton, RS-232 commands	
Emulation		
Keyboard / Mouse	USB	
Video	4096 x 2160 @ 60Hz	
LEDs		
On Line / Selected	8 (Orange)	16 (Orange)
USB Link	8 (Green)	16 (Green)
Power	1 (Green)	
Power Consumption	DC12V: 9.77W	DC12V: 13.12W
Environmental		
Operating Temperature	0 – 40°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal	
Weight	3.11 kg (6.85 lb)	3.54 kg (7.8 lb)
Dimensions (L x W x H)	43.24 x 21.43 x 4.40 cm (17.02 x 8.44 x 1.73 in.)	
Carton Lot	3 pcs	
Included Accessories	2x HDMI Cables; 2x USB 3.0 Cables; 2x Audio Cables; 1x Firmware Upgrade Cable; 1x Foot Pad Set (4 pcs); 1x Power Adapter; 1x Mounting Kit	

Optional Accessories

Type	Part No. / Spec.	Page No.
HDMI Cables	2L-7D01H (1 m), 2L-7D02H-1 (2 m), 2L-7D03H (3 m)	12-2
USB HDMI KVM Cable Kit	2L-7D02UHX3	Please refer to www.aten.com for more details.
LockPro - HDMI Cable Lock	2X-EA12	12-4
2-in-1U Rack Mount Kits	2K-0001 2K-0002	4-24

CS1798 / CS17916

8/16-Port USB HDMI/Audio KVM Switch



1

Rack KVM Switches

- CS1798



- CS17916



Front

- CS1798



- CS17916



Rear

- CS1798



- CS17916



Features

- Cascadable to three levels – controls up to 512 computers (CS1798)¹; or two levels – up to 256 computers (CS17916)
- Multi-Display feature – stack up to eight CS1798 / CS17916 units and display video from up to 8 monitors (dual display / triple display / quad display / multi-display)
- [Video DynaSync™](#) – exclusive ATEN technology eliminates boot-up display problems and optimizes the resolution when switching among different sources
- Audio enabled – full bass response provides a rich experience for 2.1 channel stereo sound
- Multilingual OSD supports English, French, German, Japanese, Russian, Simplified Chinese, Spanish and Traditional Chinese
- Independent switching of KVM and USB focus²
- Two-level (administrator / user) password authorization for enhanced security protection
- OSD Backup / Restore feature – enables the administrator to back up the switch's configuration and user profile information
- Broadcast mode – operations simultaneously performed on all selected computers, such as software installation and upgrading, system-wide shutdown, etc.
- Console audio port on front panel for easy access
- Auto Scan Mode for monitoring all computers
- Console mouse port emulation / bypass feature supports most mouse drivers and multifunction mice
- Complete keyboard emulation for error-free booting
- Mac / Sun keyboard support and emulation³
- Multilingual keyboard mapping – supports English (US), English (UK), French, German, Japanese, Korean, Spanish, and Traditional Chinese
- Supports hot-plugging

Note: 1. CS1798 cascades to CS1798 only.

2. Independent switching is only supported under mouse emulation mode.

3. PC keyboard combinations emulate Mac / Sun keyboards; Mac / Sun keyboards work only with their own computers.

Specifications

	CS1798	CS17916
Computer Connections		
Direct	8	16
Maximum	512 (via Cascade)	256 (via Cascade)
Connectors		
Console Ports	1 x HDMI Female 2 x USB Type A Female 2 x 3.5mm Audio Jack Female (Green; 1 x front, 1 x rear)	
KVM Ports	8 x HDMI Female 8 x USB Type B Female 8 x 3.5mm Audio Jack Female (Green)	16 x HDMI Female 16 x USB Type B Female 16 x 3.5mm Audio Jack Female (Green)
Firmware Upgrade	1 x RJ-11 Female	
Power	1 x DC Jack	
USB Hub	2 x USB Type A Female (1 x front, 1 x rear)	
Port Selection	OSD, Hotkey, Pushbutton	
Emulation		
Keyboard / Mouse	USB	
Video	1920 x 1080 @ 60Hz; 1920 x 1200 @ 60Hz	
LEDs		
On Line / Selected	8 (Orange)	16 (Orange)
USB Link	8 (Green)	16 (Green)
Power	1 (Dark Green)	
Power Consumption	DC5V: 8.56W	DC5V: 8.66W
Environmental		
Operating Temperature	0 – 50°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal	
Weight	3.49 kg (7.69 lb)	3.86 kg (8.5 lb)
Dimensions (L x W x H)	43.24 x 25.72 x 4.40 cm (17.02 x 10.13 x 1.73 in.)	
Carton Lot	3 pcs	
Included Accessories	2x USB HDMI KVM Cables; 1x Mounting Kit; 1x Firmware Upgrade Cable; 1x Power Adapter; 1x Foot Pad Set (4 pcs)	

Optional Accessories

Type	Part No. / Spec.	Page No.
USB HDMI KVM Cables	2L-7D02UH (1.8 m)	12-3
LockPro - HDMI Cable Lock	2X-EA12	12-4

CS1788

8-Port USB DVI Dual Link/Audio KVM Switch

Dual Link



1

Rack KVM Switches



Front



Rear



Features

- Cascadable up to three levels – controls up to 512 computers
- Multi-Display feature – stack up to four CS1788 units and display video from up to four monitors (dual display / triple display / quad display)
- Computer ports support digital (DVI) and analog (VGA) video inputs¹ – mixed operation possible
- KVM console supports a digital (DVI) or analog (VGA) video output
- Two-level (administrator / user) password authorization for enhanced security protection
- OSD backup / restore feature
- [Video DynaSync™](#) – exclusive ATEN technology eliminates boot-up display problems and optimizes the resolution when switching among different sources
- Broadcast mode – operations simultaneously performed on all selected computers, such as software installation and upgrading, system-wide shutdown, etc.
- Console audio ports on front panel for easy access
- HDCP compliant
- Independent switching of KVM and USB focus
- Console mouse port emulation / bypass feature supports most mouse drivers and multifunction mice
- Multilingual keyboard mapping – supports English (US), English (UK), French, German, Japanese, Korean, Spanish, and Traditional Chinese
- Multilingual OSD supports English, French, German, Japanese, Russian, Simplified Chinese, Spanish and Traditional Chinese
- Rack-mountable in 19" system rack
- Supports keyboard combinations via emulation (for Sun / Mac)²

Note: 1. A VGA input requires a VGA to DVI adapter or a VGA to DVI KVM cable (2L-7DX2U / 2L-7DX3U).

2. PC keyboard combinations emulate Mac / Sun keyboards; Mac / Sun keyboards work only with their own computers.

Specifications

CS1788	
Computer Connectins	
Direct	8
Maximum	512 (via Cascade)
Connectors	
Console Ports	1 x HDB-15 Female (Blue) 1 x DVI-I Female (White) 2 x USB Type A Female 2 x 3.5mm Audio Jack Female (Green; 1 x front, 1 x rear) 2 x 3.5mm Audio Jack Female (Pink; 1 x front, 1 x rear)
KVM Ports	8 x DVI-I Female (White) 8 x USB Type B Female 8 x 3.5mm Audio Jack Female (Green) 8 x 3.5mm Audio Jack Female (Pink)
Firmware Upgrade	1 x RJ-11 Female
Power	1 x DC Jack
USB Hub	2 x USB Type A Female (1 x front, 1 x rear)
Port Selection	OSD, Hotkey, Pushbutton
Emulation	
Keyboard / Mouse	USB
Video	DVI (Dual Link): 2560 x 1600 @ 60Hz; VGA: 2048 x 1536 @ 60Hz
LEDs	
On Line / Selected	8 (Orange)
USB Link	8 (Green)
Power	1 (Dark Green)
Power Consumption	DC5.3V: 8.26W
Environmental	
Operating Temperature	0 – 50°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Metal
Weight	2.80 kg (6.17 lb)
Dimensions (L x W x H)	43.72 x 16.12 x 4.40 cm (17.21 x 6.35 x 1.73 in.)
Carton Lot	3 pcs
Included Accessories	2x USB DVI-D Dual Link KVM Cables; 1x Firmware Upgrade Cable; 1x Mounting Kit; 1x Power Adapter; 1x Foot Pad Set (4 pcs)

Optional Accessories

Type	Part No. / Spec.	Page No.
USB DVI-D Single Link KVM Cables	2L-7D02U (1.8 m), 2L-7D03U (3 m), 2L-7D05U (5 m)	12-3
USB DVI-I Single Link KVM Cables	2L-7D02UI (1.8 m), 2L-7D03UI (3 m)	12-3
USB DVI-D Dual Link KVM Cables	2L-7D02UD (1.8 m), 2L-7D03UD (3 m), 2L-7D05UD (5 m)	12-3
USB VGA to DVI-I KVM Cable	2L-7DX2U (1.8 m), 2L-7DX3U (3 m)	12-3
USB HDMI to DVI-D KVM Cable	2L-7D02DH (1.8 m)	12-3

CS1768

8-Port USB DVI/Audio KVM Switch



1

Rack KVM Switches



Front



Rear



Features

- Cascadable up to three levels – controls up to 512 computers
- Multi-Display feature – stack up to four CS1768 units and display video from up to four monitors (dual display / triple display / quad display)
- Computer ports support digital (DVI) or analog (VGA) video inputs¹ – mixed operation possible
- KVM console supports a digital (DVI) or analog (VGA) video output
- Two-level (administrator / user) password authorization for enhanced security protection
- OSD backup / restore feature
- [Video DynaSync™](#) – exclusive ATEN technology eliminates boot-up display problems and optimizes the resolution when switching among different sources
- Broadcast mode – operations simultaneously performed on all selected computers, such as software installation and upgrading, system-wide shutdown, etc.
- Console audio ports on front panel for easy access
- HDCP compliant
- Independent switching of KVM and USB focus
- Console mouse port emulation / bypass feature supports most mouse drivers and multifunction mice
- Multilingual keyboard mapping – supports English (US), English (UK), French, German, Japanese, Korean, Spanish, and Traditional Chinese
- Multilingual OSD supports English, French, German, Japanese, Russian, Simplified Chinese, Spanish and Traditional Chinese
- Rack-mountable in 19" system rack
- Supports keyboard combinations via emulation (for Sun / Mac)²

Note: 1. A VGA input requires a VGA to DVI adapter or a VGA to DVI KVM cable (2L-7DX2U / 2L-7DX3U).

2. PC keyboard combinations emulate Mac / Sun keyboards; Mac / Sun keyboards work only with their own computers.

Specifications

CS1768	
Computer Connections	
Direct	8
Maximum	512 (via Cascade)
Connectors	
Console Ports	1 x HDB-15 Female (Blue) 1 x DVI-I Female (White) 2 x USB Type A Female 2 x 3.5mm Audio Jack Female (Pink; 1 x front, 1 x rear) 2 x 3.5mm Audio Jack Female (Green; 1 x front, 1 x rear)
KVM Ports	8 x DVI-I Female (White) 8 x USB Type B Female 8 x 3.5mm Audio Jack Female (Green) 8 x 3.5mm Audio Jack Female (Pink)
Firmware Upgrade	1 x RJ-11 Female (Black)
Power	1 x DC Jack
USB Hub	2 x USB Type A Female (1 x front, 1 x rear)
Port Selection	OSD, Hotkey, Pushbutton
Emulation	
Keyboard / Mouse	USB
Video	DVI (Single Link): 1920 x 1200 @ 60Hz; VGA: 2048 x 1536 @ 60Hz
LEDs	
On Line / Selected	8 (Orange)
USB Link	8 (Green)
Power	1 (Dark Green)
Power Consumption	DC5.3V: 4.53W
Environmental	
Operating Temperature	0 – 50°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Metal
Weight	2.80 kg (6.17 lb)
Dimensions (L x W x H)	43.72 x 16.12 x 4.40 cm (17.21 x 6.35 x 1.73 in.)
Carton Lot	3 pcs
Included Accessories	2x USB DVI-D Single Link KVM Cables; 1x Firmware Upgrade Cable; 1x Mounting Kit; 1x Power Adapter; 1x Foot Pad Set (4 pcs)

Optional Accessories

Type	Part No. / Spec.	Page No.
USB DVI-D Single Link KVM Cables	2L-7D02U (1.8 m), 2L-7D03U (3 m), 2L-7D05U (5 m)	12-3
USB DVI-I Single Link KVM Cable	2L-7D02UI (1.8 m), 2L-7D03UI (3 m)	12-3
USB VGA to DVI-I KVM Cable	2L-7DX2U (1.8 m), 2L-7DX3U (3 m)	12-3
USB HDMI to DVI-D KVM Cable	2L-7D02DH (1.8 m)	12-3

CS1754 / CS1758

4/8-Port PS/2-USB VGA/Audio KVM Switch

Rack-Mountable PS/2 & USB Switch + Audio



Front

- CS1754



- CS1758



Rear

- CS1754



- CS1758



Features

- Cascadable up to 3 levels – controls up to 64 / 512 computers
- Dual interface supports computers with PS/2 or USB keyboards and mice
- Auto PS/2 and USB interface detection
- [Buzzer on/off via hotkey and OSD](#)
- ATEN USB ASIC inside
- Special design for easy stacking
- Rack-mountable in 19" system rack

Specifications

	CS1754	CS1758
Computer Connections		
Direct	4	8
Maximum	64 (via Cascade)	512 (via Cascade)
Connectors		
Console Ports	1 x HDB-15 Female (Blue) 2 x USB Type A Female 1 x 3.5mm Audio Jack Female (Green) 1 x 3.5mm Audio Jack Female (Pink)	
KVM Ports	4 x SPHD Female (Yellow) 4 x 3.5mm Audio Jack Female (Green) 4 x 3.5mm Audio Jack Female (Pink)	8 x SPHD Female (Yellow) 8 x 3.5mm Audio Jack Female (Green) 8 x 3.5mm Audio Jack Female (Pink)
Firmware Upgrade	1 x RJ-11 Female	
Power	1 x DC Jack (Black)	
Port Selection	OSD, Hotkey, Pushbutton	
Emulation		
Keyboard / Mouse	USB	
Video	2048 x 1536; DDC2B	
LEDs		
Online	4 (Orange)	8 (Orange)
Selected	4 (Green)	8 (Green)
Power	1 (Blue)	1 (Blue)
Power Consumption	DC5V: 1.63W	DC5V: 2.32W
Environmental		
Operating Temperature	0 – 50°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal	
Weight	2.64 kg (5.81 lb)	2.72 kg (5.99 lb)
Dimensions (L x W x H)	43.72 x 16.10 x 4.40 cm (17.21 x 6.34 x 1.73 in.)	
Carton Lot	3 pcs	
Included Accessories	1x Firmware Upgrade Cable; 1x Mounting Kit; 1x Power Adapter	

Optional Accessories

Type	Part No. / Spec.	Page No.
PS/2 KVM Cables	2L-5302P (1.8 m), 2L-5303P (3 m), 2L-5305P (5 m)	12-2
USB KVM Cables	2L-5301U (1.2 m), 2L-5302U (1.8 m), 2L-5303U (3 m), 2L-5305U (5 m)	12-2

CS1708A / CS1716A


8/16-Port PS/2-USB VGA KVM Switch with Daisy-Chain Port and USB Peripheral Support

Rack-Mountable PS/2 & USB KVM Switch with USB Peripheral Port



Front

- CS1708A



- CS1716A



Rear

- CS1708A



- CS1716A



Features

- Daisy-chain up to 31 additional units – controls up to 256 / 512 computers from a single console
- [Video DynaSync™](#) – exclusive ATEN technology eliminates boot-up display problems and optimizes the resolution when switching among different sources
- Auto-senses station's position on daisy-chained installations; no need for manual DIP switch setting; front panel LED indicates station's position
- Broadcast mode – operations simultaneously performed on all selected computers, such as software installation and upgrading, system-wide shutdown, etc.
- Auto PS/2 and USB interface detection
- [Buzzer on/off via hotkey and OSD](#)

Specifications

	CS1708A	CS1716A
Computer Connections		
Direct	8	16
Maximum	256 (via Daisy-chain)	512 (via Daisy-chain)
Connectors		
Console Ports	1 x SPHD Male (Yellow)	
KVM Ports	8 x SPHD Female (Yellow)	16 x SPHD Female (Yellow)
Daisy Chain Ports	1 x DB-25 Female (Black) 1 x DB-25 Male (Black)	
Firmware Upgrade	1 x RJ-11 Female (Black)	
Power	1 x DC Jack Female (Black)	
USB Port	1 x USB Type A Female	
Port Selection	OSD, Hotkey, Pushbutton	
Emulation		
Keyboard / Mouse	PS/2, USB	
Video	2048 x 1536; DDC2B	
LEDs		
Online	8 (Orange)	16 (Orange)
Selected	8 (Green)	16 (Green)
Station ID	1 x 2-digit, 7-segment (Orange)	
Power	1 (Dark Green)	
Power Consumption	DC5.3V: 3.8W	DC5.3V: 5.31W
Environmental		
Operating Temperature	0 – 50°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal	
Weight	2.66 kg (5.86 lb)	2.85 kg (6.28 lb)
Dimensions (L x W x H)	43.72 x 15.99 x 4.40 cm (17.21 x 6.3 x 1.73 in.)	
Carton Lot	3 pcs	
Included Accessories	1x USB KVM Cable; 1x PS/2 KVM Cable; 1x Console Cable; 1x Firmware Upgrade Cable; 1x Mounting Kit; 1x Power Adapter; 1x Foot Pad Set (4 pcs)	

Optional Accessories

Type	Part No. / Spec.	Page No.
PS/2 KVM Cables	2L-5201P (1.2 m), 2L-5202P (1.8 m), 2L-5203P (3 m), 2L-5206P (6 m), 2L-5210P (10 m)	12-1
USB KVM Cables	2L-5201U (1.2 m), 2L-5202U (1.8 m), 2L-5203U (3 m), 2L-5205U (5 m)	12-2
Daisy-chain Cables	2L-1700 (0.6 m), 2L-1701 (1.8 m), 2L-1703 (3 m), 2L-1705 (5 m), 2L-1715 (15 m)	12-3

CS1308 / CS1316

8/16-Port PS/2-USB VGA KVM Switch



1

Rack KVM Switches

Front

- CS1308



- CS1316



Rear

- CS1308



- CS1316



Features

- Cascadable up to 2 levels – controls up to 64 / 256 computers
- [Video DynaSync™](#) – exclusive ATEN technology eliminates boot-up display problems and optimizes the resolution when switching among different sources
- Broadcast mode – operations simultaneously performed on all selected computers, such as software installation and upgrading, system-wide shutdown, etc.
- Dual interface – supports computers with PS/2 or USB keyboards and mice
- Auto PS/2 and USB interface detection
- [Buzzer on/off via hotkey and OSD](#)
- Rack-mountable in 19" system rack

Specifications

	CS1308	CS1316
Computer Connections		
Direct	8	16
Maximum	64 (via Cascade)	256 (via Cascade)
Connectors		
Console Ports	1 x SPHD Male (Yellow)	
KVM Ports	8 x SPHD Female (Yellow)	16 x SPHD Female (Yellow)
Firmware Upgrade	1 x RJ-11 Female (Black)	
Power	1 x DC Jack	
Port Selection	OSD, Hotkey, Pushbutton	
Emulation		
Keyboard / Mouse	PS/2, USB	
Video	2048 x 1536; DDC2B	
LEDs		
Online	8 (Orange)	16 (Orange)
Selected	8 (Green)	16 (Green)
Power	1 (Dark Green)	
Power Consumption	DC5.3V: 2.34W	DC5.3V: 3.83W
Environmental		
Operating Temperature	0 – 50°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal	
Weight	1.89 kg (4.16 lb)	2.10 kg (4.63 lb)
Dimensions (L x W x H)	43.72 x 16.13 x 4.40 cm (17.21 x 6.35 x 1.73 in.)	
Carton Lot	3 pcs	
Included Accessories	1x Console Cable; 1x Firmware Upgrade Cable; 1x Mounting Kit; 1x Power Adapter; 1x Foot Pad Set (4 pcs)	

Optional Accessories

Type	Part No. / Spec.	Page No.
PS/2 KVM Cables	2L-5201P (1.2 m), 2L-5202P (1.8 m), 2L-5203P (3 m), 2L-5206P (6 m), 2L-5210P (10 m)	12-1
PS/2-USB VGA KVM Cables	2L-5301UP (1.2 m), 2L-5302UP (1.8 m), 2L-5303UP (3 m)	12-2
USB KVM Cables	2L-5201U (1.2 m), 2L-5202U (1.8 m), 2L-5203U (3 m), 2L-5205U (5 m)	12-2

KVM over IP Switches

CN8000A / CN8600 / CN9000 / CN9600 / CN9900 / CN9950 – Provide over IP Capability for KVM Switches

The CN series is our most cost-effective over IP solutions that are perfect for small racks in data centers without built-in IP functionality and ideal for WFH (work-from-home) scenario where remote work is demanded.

CS1708i / CS1716i – All-in-One over IP Server Management Solution

The CS1708i / CS1716i KVM switches are IP-based KVM control units that allow both local and remote users to monitor and access multiple computers from a single console.



2

KVM over IP Switches

- **Remote Desktop Scaling**

KVM over IP switches allow administrators to view the installation server's video output from remote locations in either full-screen or in a flexible scaled window.

- **Unrestricted Language Input**

KVM over IP switches support an on-screen keyboard available in multiple languages.

- **Powerful Security Alternatives**

KVM over IP switches support authentication and authorization management from third-party authentication services – e.g. RADIUS, LDAP, LDAPS, and MS Active Directory.

- **Serial Console Management**

The CN8000A / CN8600 / CN9000 / CN9600 / CN9900 / CN9950 KVM over IP switches provide serial console management such as serial terminal access and out-of-band support. Serial terminal access can be accomplished either with the switch's built-in serial viewer, or via third-party software (such as PuTTY) for Telnet and SSH sessions. In addition, CN9600 only complies with the DTE / DCE standard.

- **Centralized Server Monitoring**

Panel Array Mode™ allows administrators to display the video output of up to 16 servers on one monitor simultaneously, while a convenient Auto Scan feature permits automatic switching from port to port at user-specified intervals.

- **Mouse DynaSync™**

The Mouse DynaSync™ function provides automatic locked-in synchronizing of the remote and local mouse pointers – resulting in perfect mouse alignment regardless of the mouse acceleration settings on the server and eliminating the need for synchronizing time between the two mice.

- **Centralized Real-Time Updating and Maintenance**


Virtual Media support allows users to map DVD / CD-ROMs and other storage media to a remote server. Performing firmware upgrades, diagnostic tests, file transfers, and installing OS and application patches can all be accomplished smoothly and quickly across the installation from a single console located anywhere in the world.

- **Message Board**

The Message Board function is similar to an Internet chat room and allows administrators to share management information and resolve port access conflicts.

Note:

The features highlighted above are not available in all products. Please refer to each product page for more details. Product information is subject to change without prior notice.

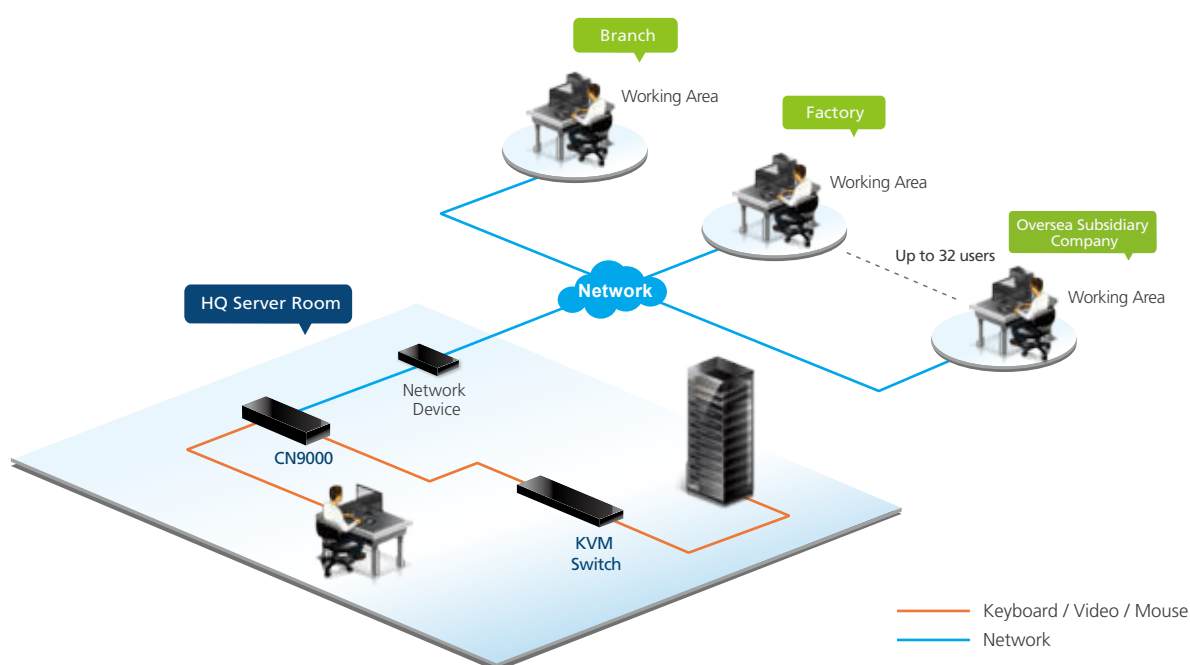

Feature Comparison

Model No.		CN8000A	CN8600	CN9000	CN9900 / CN9950		CN9600	CS1708i / CS1716i
Type		KVM over IP	KVM over IP	KVM over IP	KVM over IP		KVM over IP	KVM over IP
Computer Connections	Direct	1	1	1	1		1	8 / 16
	Max.	1	1	1	1		1	128 / 256
Interface	Video	VGA (SPHD)	DVI-D	VGA (SPHD)	DisplayPort		DVI-D	VGA (SPHD)
Bus Sessions	Local/Remote	1	1	1	1		1	1
Local Console		PS/2, USB	USB	USB	USB		USB	PS/2, USB
Mouse DynaSync™		•	•	•	•		•	•
Virtual Media		•	•	•	•		•	N/A
Panel Array Mode		N/A	N/A	N/A	N/A		N/A	•
Smart Card Reader		•	•	•	•		•	N/A
IPv6		•	•	•	•		•	•
Video		Up to 1920 x 1200 @ 60Hz; DDC2B	Local / Remote 1920 x 1200 @ 60Hz	Local / Remote 1920 x 1200 @ 60Hz	Local / Remote 1920 x 1200 @ 60Hz	Local / Remote 4K DCI @ 30Hz	Local / Remote 1920 x 1200 @ 60Hz	Local - 2048 x 1536; DDC2B Remote - FHD: 1920 x 1200 @ 60Hz; Non - FHD: 1600 x 1200 @ 60Hz

CN9950 / CN9900

1-Local/Remote Share Access Single Port 4K DisplayPort KVM over IP Switch /

1-Local/Remote Share Access Single Port DisplayPort KVM over IP Switch



• CN9950



• CN9900



Front

• CN9950 / CN9900



Rear

• CN9950 / CN9900



Features

- A mini USB port in the front panel can serve as a Virtual Media USB port or a Laptop USB Console (LUC) port
- Compact and slim design for space utility optimization
- Supports 5-pin Relay/DI control Terminal for environment monitoring and control
- Pixel clear DP compatible with DP 1.2 up to DCI 4K @30Hz (CN9950 only)
- Provides a FPGA graphics processor for better image quality and enhanced fps (frames per second) throughput for crisp video display response
- Two 10/100/1000 Mbps NICs for redundant LAN or two IP operation
- Dual power supply and dual LAN for backup
- Local/Remote Share Mode conveniently grants shared or exclusive console privilege
- Provides over IP capability to DisplayPort KVM switches without over IP functionality*
- Access the CN9950 / CN9900 via a built-in serial viewer, or via third-party software (such as PuTTY) for Telnet and SSH sessions

Note: * Compatible KVM Switch: ATEN DisplayPort KVM Switches

Specifications

	CN9950	CN9900
Connectors		
Console Ports	2 x USB Type A Female (White) 1 x DisplayPort Female (White) 1 x 3.5mm Audio Jack Female (Green) 1 x 3.5mm Audio Jack Female (Pink)	
KVM Ports	1 x USB Type B Female (White) 1 x DisplayPort Female (White) 1 x 3.5mm Audio Jack Female (Green) 1 x 3.5mm Audio Jack Female (Pink)	
LAN Ports	2 x RJ-45 Female	
LUC Port	1 x USB Mini-B Female	
Power	2 x DC Jack	
Serial Port	2 x RJ-45 Female	
Control Port	1 x PS/2 Female	
Switches		
Reset	1 x Semi-recessed pushbutton (Black)	
Emulation		
Keyboard / Mouse	USB	
LEDs		
Power	2 (Green)	
Video	Local console / Remote - 1920 x 1200 @ 60 Hz	Local console / Remote - DCI 4K @ 30 Hz
Environmental		
Operating Temperature	0 – 50°C 0 – 40°C (Power Adapter)	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal	

Optional Accessories

Type	Part No. / Spec.	Page No.
DisplayPort Cables	2L-7D02DP (1.8 m), 2L-7D03DP (3 m)	12-3

CN9600

1-Local/Remote Share Access Single Port DVI KVM over IP Switch



Front



Rear



Features

- A mini USB port in the front panel can serve as a Virtual Media USB port or a Laptop USB Console (LUC) port
- Compact and slim design for space utility optimization
- Provides a FPGA graphics processor for better image quality and enhanced fps (frames per second) throughput for crisp video display response
- Complies to the RS-232 DTE/DCE standards for serial control
- Two 10/100/1000 Mbps NICs for redundant LAN or two IP operation
- Dual power supply and dual LAN for backup
- Local/Remote Share Mode conveniently grants shared or exclusive console privilege
- Provides over IP capability to DVI KVM switches without over IP functionality*
- Audio support – microphone and speaker ports on the local and remote console
- Access the CN9600 via a built-in serial viewer, or via third-party software (such as PuTTY) for Telnet and SSH sessions
- Supports TLS 1.2 data encryption and RSA 2048-bit certificates for securing users logging in from browsers

Note: * Compatible KVM Switch: ATEN DVI Single Link KVM Switches

Specifications

	CN9600
Connectors	
Console Ports	2 x USB Type A Female (White) 1 x DVI-D Female (White) 1 x 3.5mm Audio Jack Female (Green) 1 x 3.5mm Audio Jack Female (Pink)
KVM Ports	1 x USB Type B Female (White) 1 x DVI-D Female (White) 1 x 3.5mm Audio Jack Female (Green) 1 x 3.5mm Audio Jack Female (Pink)
LAN Ports	2 x RJ-45 Female
LUC Port	1 x USB Mini-B Female
Power	2 x DC Jack
Serial Port	2 x RJ-45 Female
Control Port	1 x PS/2 Female
LEDs	
Power	1 (Green)
Video	
	Local console - 1920 x 1200 @ 60 Hz Remote - 1920 x 1200 @ 60 Hz
Emulation	
Keyboard / Mouse	USB
Power Consumption	
	DC5V: 5.55W
Environmental	
Operating Temperature	0 – 50°C (CN9600) 0 – 40°C (Power Adapter)
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Metal
Weight	0.84 kg (1.85 lb)
Dimensions (L x W x H)	20.00 x 15.49 x 2.85 cm (7.87 x 6.1 x 1.12 in.)
Carton Lot	
	5 pcs
Included Accessories	
	1x USB DVI-D KVM Cable; 1x USB 2.0 Cable; 1x Power Adapter; 1x Mounting Kit

Optional Accessories

Type	Part No. / Spec.	Page No.
USB DVI-D Single Link KVM Cables	2L-7D02U (1.8 m), 2L-7D03U (3 m), 2L-7D05U (5 m)	12-3
USB HDMI to DVI-D Single Link KVM Cable	2L-7D02DH (1.8 m)	12-3
USB HDMI to DVI-D Dual Link KVM Cable	2L-7D02UD (1.8m)	12-3

CN9000

1-Local/Remote Share Access Single Port VGA KVM over IP Switch



Front



Rear



Features

- High video resolution – up to 1920 x 1200 @ 60 Hz
- Laptop USB Console (LUC) – a dedicated USB port directly connects to laptop for easy console operation
- Message board – convenient communication for remote users
- Serial console management – access server via built-in serial viewer or third party software (such as PuTTY) for Telnet and SSH sessions
- Provides over IP capability to KVM switches without over IP functionality
- Browser-based UI in pure web technology allows administrators to perform administrative tasks without a pre-installed Java software package required
- Provides a FPGA graphics processor for better image quality and enhanced fps (frames per second) throughput for crisp video display response
- Dual power supply and dual LAN for backup
- Supports 5-pin Relay/DI control Terminal for environment monitoring and control
- Supports Legacy PS/2 keyboard and mouse

Specifications

CN9000	
Connectors	
Console Ports	2 x USB Type A Female (White) 1 x VGA Female (White) 1 x 3.5mm Audio Jack Female (Green) 1 x 3.5mm Audio Jack Female (Pink)
KVM Ports	1 x USB Type B Female (White) 1 x VGA Female (White) 1 x 3.5mm Audio Jack Female (Green) 1 x 3.5mm Audio Jack Female (Pink)
LAN Ports	2 x RJ-45 Female
LUC Port	1 x USB Mini-B Female
Power	2 x DC Jack
Serial Port	2 x RJ-45 Female
Control Port	1 x PS/2 Female
Switches	
Reset	1 x Semi-recessed pushbutton (Black)
Emulation	
Keyboard / Mouse	USB
LEDs	
Power	2 (Green)
Video	Local console / Remote - 1920 x 1200 @ 60 Hz
Environmental	
Operating Temperature	0 – 50°C 0 – 40°C (Power Adapter)
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Metal

Optional Accessories

Type	Part No. / Spec.	Page No.
USB KVM Cables	2L-5201U (1.2 m), 2L-5202U (1.8 m), 2L-5203U (3 m), 2L-5205U (5 m)	12-2
PS/2 KVM Cables	2L-5201P (1.2 m), 2L-5202P (1.8 m), 2L-5203P (3 m), 2L-5206P (6 m)	12-1
PS/2-USB VGA KVM Cables	2L-5301UP (1.2 m), 2L-5302UP (1.8 m), 2L-5303UP (3 m)	12-2

CN8600

1-Local/Remote Share Access

Single Port DVI KVM over IP Switch (1920 x 1200)



Front



Rear



Features

- A mini USB port in the rear panel can serve as a Virtual Media USB port or a Laptop USB Console (LUC) port
- Message board – convenient communication for remote users
- Two 10/100/1000 Mbps NICs for redundant LAN or two IP operation
- Dual power supply and dual LAN for backup
- Enhanced FPS (Frames Per Second) throughput for vivid video quality
- Local/Remote Share Mode conveniently grants shared or exclusive console privilege
- Console Lock Switch – flexible remote/console access management
- Integration with ATEN CC2000 Centralized Management Software
- Integration with ATEN CCSR Video Session Recording Software
- Provides over IP capability to DVI KVM switches without over IP functionality*
- Audio support – microphone and speaker ports on the local and remote console
- Access the CN8600 via a built-in serial viewer, or via third-party software (such as PuTTY) for Telnet and SSH sessions
- Supports TLS 1.2 data encryption and RSA 2048-bit certificates for securing users logging in from browsers

Note: * Compatible KVM Switch: ATEN DVI Single Link KVM Switches

Specifications

	CN8600
Connectors	
Console Ports	2 x USB Type A Female (White) 1 x DVI-D Female (White) 1 x Mini Stereo Jack Female (Green) 1 x Mini Stereo Jack Female (Pink)
KVM Ports	1 x USB Type B Female (White) 1 x DVI-D Female (White) 1 x Mini Stereo Jack Female (Green) 1 x Mini Stereo Jack Female (Pink)
LAN Ports	2 x RJ-45 Female
LUC Port	1 x USB Mini-B Female
Power	2 x DC Jack
PON	1 x RJ-45 Female
Serial	1 x RJ-45 Female
Control	1x PS/2 Female
LEDs	
Console Status	1 (Green)
10/100/1000 Mbps	2 (Orange / Orange+Green / Green)
Remote Login	1 (Green)
Power	1 (Green)
Video	Local / Remote - 1920 x 1200 @ 60Hz RB
Emulation	
Keyboard / Mouse	USB
Power Consumption	DC5.3V: 5.56W
Environmental	
Operating Temperature	0 – 50°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Metal
Weight	0.88 kg (1.94 lb)
Dimensions (L x W x H)	26.00 x 7.64 x 4.20 cm (10.24 x 3.01 x 1.65 in.)
Carton Lot	5 pcs
Included Accessories	1x USB DVI-D KVM Cable; 1x USB Cable; 1x Power Adapter; 1x Mounting Kit

Optional Accessories

Type	Part No. / Spec.	Page No.
USB DVI-D Single Link KVM Cables	2L-7D02U (1.8 m), 2L-7D03U (3 m), 2L-7D05U (5 m)	12-3
USB HDMI to DVI-D Single Link KVM Cable	2L-7D02DH (1.8 m)	12-3

CN8000A

1-Local/Remote Share Access

Single Port VGA KVM over IP Switch (1920 x 1200)



Front



Rear



Features

- High video resolution – up to 1920 x 1200 @ 60 Hz
- Laptop USB Console (LUC) – a dedicated USB port directly connects to laptop for easy console operation
- Easy configuration through local console OSD
- Message board – convenient communication for remote users
- Serial console management – access server via built-in serial viewer or third party software (such as PuTTY) for Telnet and SSH sessions
- Exit macro support
- Integration with ATEN CC2000 Centralized Management Software
- Integration with ATEN CCVSR Video Session Recording Software
- Provides over IP capability to KVM switches without over IP functionality
- Critical system events sent by email and SNMP trap; Syslog support
- Browser-based and AP GUIs offer a unified multilingual interface for easy and convenient use
- Browser-based UI in pure web technology allows administrators to perform administrative tasks without a pre-installed Java software package required
- Supports TLS 1.2 data encryption and RSA 2048-bit certificates for securing users logging in from browsers

Specifications

	CN8000A
Connectors	
Console Ports	1 x SPHD Male (Yellow)
KVM (Computer) Ports	1 x SPHD Female (Yellow)
Laptop USB Console (LUC) Port	1 x USB Mini-B Female
PON	1 x DB-9 Male
Modem / RS-232	1 x DB-9 Male
LAN Ports	1 x RJ-45 Female
Power	1 x DC Jack
LEDs	
Power	1 (Orange)
Link	1 (Green)
10/100/1000 Mbps	1 (Orange / Orange + Green / Green)
Video	Up to 1920 x 1200 @ 60Hz; DDC2B
Emulation	
Keyboard / Mouse	USB, PS/2
Power Consumption	DC5.3V: 4.79W
Environmental	
Operating Temperature	0 – 50°C (CN8000A) 0 – 40°C (Power Adapter)
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Metal
Weight	0.49 kg (1.08 lb)
Dimensions (L x W x H)	20.00 x 8.14 x 2.50 cm (7.87 x 3.2 x 0.98 in.)
Carton Lot	5 pcs
Included Accessories	1x Custom KVM Cable; 1x Custom Console Cable; 1x Laptop USB Console Cable; 1x Power Adapter; 1x Mounting Kit

Optional Accessories

Type	Part No. / Spec.	Page No.
USB KVM Cables	2L-5201U (1.2 m), 2L-5202U (1.8 m), 2L-5203U (3 m), 2L-5205U (5 m)	12-2
PS/2 KVM Cables	2L-5201P (1.2 m), 2L-5202P (1.8 m), 2L-5203P (3 m), 2L-5206P (6 m)	12-1
PS/2-USB VGA KVM Cables	2L-5301UP (1.2 m), 2L-5302UP (1.8 m), 2L-5303UP (3 m)	12-2

CS1708i / CS1716i

1-Local/Remote Share Access

8/16-Port PS/2-USB VGA KVM over IP Switch



Front

- CS1708i



- CS1716i



Rear

- CS1708i



- CS1716i



Features

- Secure keyboard/mouse/video transmission via RC4 128-bit encryption
- Supports TLS 1.2 data encryption and RSA 2048 bit certificates for securing users logging in from browsers
- Panel array mode enables user to monitor multiple servers from single screen at the same time
- IPv6 capable
- Message board – convenient communication for remote users
- Adjustable video quality for flexible adaptation to diverse network environments
- Windows client and Java client software support; Java client works with all operating systems
- Front access USB port* allows each computer to access USB peripherals
- Video DynaSync™ – exclusive ATEN technology eliminates boot-up display problems and optimizes the resolution when switching among different sources

Note: * Local console only

Specifications


	CS1708i	CS1716i
Computer Connection		
Direct	8	16
Max.	128 (via daisy chain)	256 (via daisy chain)
Console Connections		
Local / Remote	1	
Port Selection	OSD / GUI, Hotkey, Pushbutton	
Connectors		
Console Ports	1 x SPHD Male (Yellow)	
KVM Ports	8 x SPHD Female (Yellow)	16 x SPHD Female (Yellow)
Daisy Chain Ports	1 x DB-25 Male	
Power	1 x DC Jack	
LAN Ports	1 x RJ-45 Female	
Firmware Upgrade	1 x RJ-11	
USB Port	1 x USB Type A Female	
LEDs		
Online	8 (Orange)	16 (Orange)
Selected	8 (Green)	16 (Green)
Station ID	1 x 2-digit, 7-segment (Orange)	
Power	1 (Dark Green)	
10/100 Mbps	1 (Orange / Green - at LAN port)	
Emulation		
Keyboard / Mouse	PS/2, USB	
Video		
Local	2048 x 1536; DDC2B	
Remote	FHD: 1920 x 1200 @ 60Hz Non-FHD: 1600 x 1200 @ 60Hz	
Power Consumption	DC5.3V: 7.67W	DC5.3V: 9.2W
Environmental		
Operating Temperature	0 – 50°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal	
Weight	2.81 kg (6.19 lb)	3.00 kg (6.61 lb)
Dimensions (L x W x H)	43.72 x 15.96 x 4.40 cm (17.21 x 6.28 x 1.73 in.)	
Carton Lot	3 pcs	
Included Accessories	1x USB KVM Cable; 1x PS/2 KVM Cable; 1x Custom Console Cable; 1x Firmware Upgrade Cable; 1x Power Adapter; 1x Mounting Kit; 1 x Foot Pad Set (4 pcs)	

Optional Accessories

Type	Part No. / Spec.	Page No.
USB KVM Cables	2L-5201U (1.2 m), 2L-5202U (1.8 m), 2L-5203U (3 m), 2L-5205U (5 m)	12-2
PS/2 KVM Cables	2L-5201P (1.2 m), 2L-5202P (1.8 m), 2L-5203P (3 m), 2L-5206P (6 m), 2L-5210P (10 m)	12-1
Daisy-chain Cables	2L-1700 (0.6 m), 2L-1701 (1.8 m), 2L-1703 (3 m), 2L-1705 (5 m), 2L-1715 (15 m)	12-3

Secure KVM Switches

ATEN Secure KVM Switches are compliant with PSS PP v3.0 and specifically designed to enforce stringent desktop security by keeping sensitive assets isolated while providing advanced user data protection and flexible administrative security management features. They are suitable for deployment in any industry that needs to handle sensitive, confidential, or proprietary information, or implement multi-level security on separate networks, such as government and military agencies, healthcare providers, banking & finance institutions, and more.

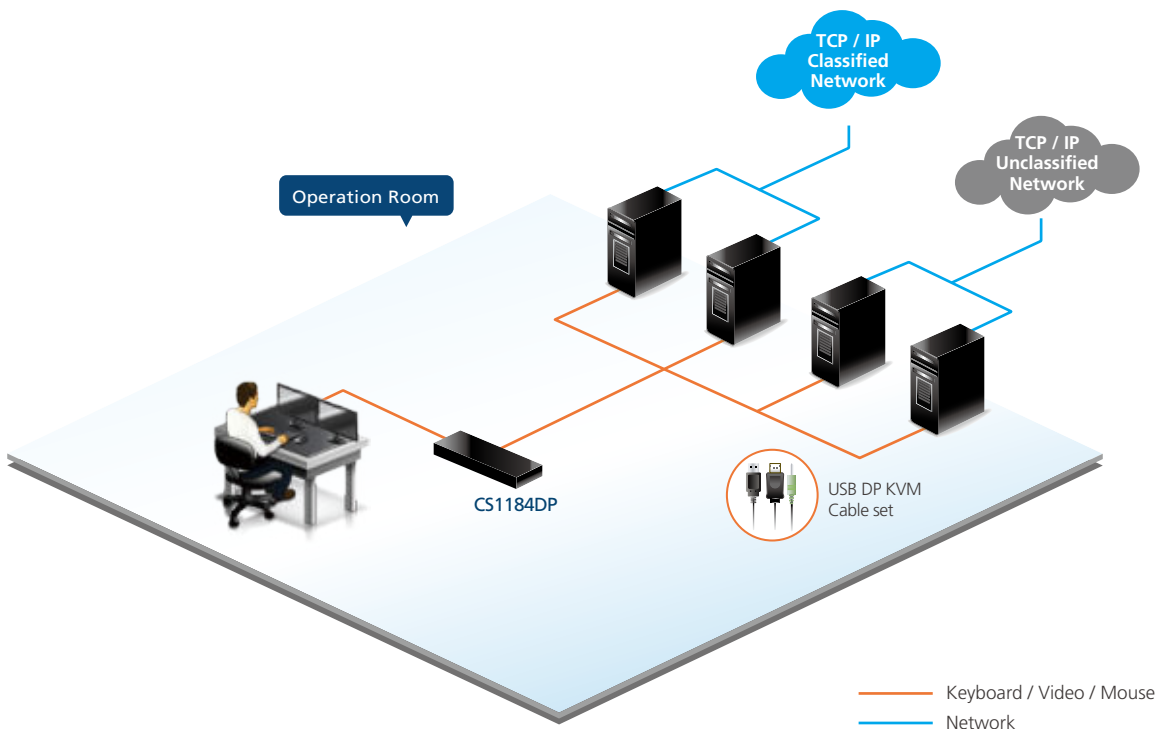

PSS PP v3.0 Secure KVM Switch Series



2/4/8-Port USB DVI / HDMI / DisplayPort

Single / Dual Display Secure KVM Switch Series



Front

- CS1182DP



- CS1184H



- CS1148D



Rear

- CS1182DP



- CS1184H



- CS1148D



NIAP Common Criteria Compliant

- Compliant with PSS PP v3.0 (Protection Profile for Peripheral Sharing Switch, Version 3.0) security requirements

Multi-Layered Security

- Always-on chassis intrusion detection – renders the ATEN PSS PP v3.0 Secure KVM Switch Series inoperable when physical tampering is detected
- Tamper-evident labels – provides visual indication of any attempt to access the ATEN PSS PP v3.0 Secure KVM Switch's internal components
- Non-reprogrammable firmware – prevents reprogramming the ATEN PSS PP v3.0 Secure KVM Switch's firmware
- Restricted peripheral connectivity – non-authorized HIDs (Human Interface Devices), video, or authentication device connections are rejected

Data Channel Isolation and Unidirectional Data Flow

- True data path isolation – data cannot be transferred between computers
- The ATEN PSS PP v3.0 Secure KVM Switch controls and isolates data flow between the console devices and connected computers
- Unidirectional data flow between the console devices and the selected computer is ensured

User Data Protection

- The ATEN PSS PP v3.0 Secure KVM Switch's keyboard/mouse data is automatically deleted after transmission and automatically purged when the KVM port focus is switched

Security Management

- Supports administrative configuration of CAC Port filtering to accept or reject specific USB authentication devices
- Provides administrative functions for authorized administrator to audit KVM log data

Features

- Superior video quality – up to 4K (3840 x 2160 @ 30Hz)¹
- Port selection via pushbuttons only to enhance security
- [Video DynaSync™](#) – exclusive ATEN technology eliminates boot-up display problems and optimizes resolutions when switching among different sources
- Supports enable/disable CAC function port by port
- LED indicators for peripheral filtering and KVM security status
- Rugged metal enclosure
- Built-in internal power
- Supports analog audio (speaker only)²

Note: 1. HDMI and DisplayPort Secure KVM Switch series support console video output resolutions up to 3840 x 2160 @ 30 Hz. DVI Secure KVM Switches offer up to 3840 x 2160 @ 30 Hz video output on compatible HDMI-interfaced monitors / computers with ATEN DVI-to-HDMI KVM cables.

2. Only analog speaker data input is supported.

Specifications

	CS1182DP	CS1184DP	CS1188DP	CS1142DP	CS1144DP	CS1148DP
Ports	2	4	8	2	4	8
PC Video Connector	DisplayPort					
Console Video Connector	HDMI					
Number of Displays	Single display			Dual display		
Video	Max. 3840 x 2160 @ 30Hz (UHD)			Max. 3840 x 2160 @ 30Hz (UHD)		
Console Keyboard / Mouse Interface	PS/2, USB			PS/2, USB		
CAC Port	Yes			Yes		
Audio	analog speaker only			analog speaker only		
Keyboard / Mouse Emulation	USB			USB		
I/P Rating	100–240V AC; 50-60Hz; 1A			100–240V AC; 50-60Hz; 1A		
Power Consumption	AC110V: 3.8W; AC220V: 3.8W	AC110V: 5W; AC220V: 4.7W	AC110V: 9.7W; AC220V: 9.7W	AC110V: 5.5W; AC220V: 5.3W	AC110V: 8.2W; AC220V: 8W	AC110V: 15.8W; AC220V: 15.3W
Environmental						
Operating Temperature	0 – 50°C			0 – 50°C		
Storage Temperature	-20 – 60°C			-20 – 60°C		
Humidity	0 – 80% RH, Non-condensing			0 – 80% RH, Non-condensing		
Physical Properties						
Housing	Metal			Metal		
Weight	1.76 kg (3.88 lb)	1.81 kg (3.99 lb)	3.30 kg (7.27 lb)	2.13 kg (4.69 lb)	2.18 kg (4.8 lb)	3.22 kg (7.09 lb)
Dimensions (L x W x H)	33.50 x 16.43 x 4.40 cm (13.19 x 6.47 x 1.73 in.)	33.50 x 16.43 x 4.40 cm (13.19 x 6.47 x 1.73 in.)	43.24 x 20.49 x 6.55 cm (17.02 x 8.07 x 2.58 in.)	33.50 x 16.39 x 6.55 cm (13.19 x 6.45 x 2.58 in.)	33.50 x 16.39 x 6.55 cm (13.19 x 6.45 x 2.58 in.)	43.24 x 20.49 x 6.55 cm (17.02 x 8.07 x 2.58 in.)
Carton Lot	3 pcs					
Included Accessories	1x Power Cord			1x Power Cord		

	CS1182H	CS1184H	CS1188H	CS1142H	CS1144H	CS1148H
Ports	2	4	8	2	4	8
PC Video Connector	HDMI					
Console Video Connector	HDMI					
Number of Displays	Single Display			Dual Display		
Video	Max. 3840 x 2160 @ 30Hz (UHD); 1920 x 1080 (FHD)			Max. 3840 x 2160 @ 30Hz (UHD); 1920 x 1080 (FHD)		
Console Keyboard / Mouse Interface	PS/2, USB			PS/2, USB		
CAC Port	Yes			Yes		
Audio	analog speaker only			analog speaker only		
Keyboard / Mouse Emulation	USB			USB		
I/P Rating	100–240V AC; 50-60Hz; 1A			100–240V AC; 50-60Hz; 1A		
Power Consumption	AC110V: 2.8W; AC220V: 2.4W	AC110V: 3W; AC220V: 3.1W	AC110V: 5.7W; AC220V: 5.7W	AC110V: 4.5W; AC220V: 4.2W	AC110V: 3.9W; AC220V: 3.6W	AC110V: 6.1W; AC220V: 5.9W
Environmental						
Operating Temperature	0 – 50°C			0 – 50°C		
Storage Temperature	-20 – 60°C			-20 – 60°C		
Humidity	0 – 80% RH, Non-condensing			0 – 80% RH, Non-condensing		
Physical Properties						
Housing	Metal			Metal		
Weight	1.76 kg (3.88 lb)	1.76 kg (3.88 lb)	3.30 kg (7.27 lb)	2.06 kg (4.54 lb)	2.11 kg (4.65 lb)	3.21 kg (7.07 lb)
Dimensions (L x W x H)	33.50 x 16.39 x 4.40 cm (13.19 x 6.45 x 1.73 in.)	33.50 x 16.43 x 4.40 cm (13.19 x 6.47 x 1.73 in.)	43.24 x 20.49 x 6.55 cm (17.02 x 8.07 x 2.58 in.)	33.50 x 16.39 x 6.55 cm (13.19 x 6.45 x 2.58 in.)	33.50 x 16.39 x 6.55 cm (13.19 x 6.45 x 2.58 in.)	43.24 x 20.49 x 6.55 cm (17.02 x 8.07 x 2.58 in.)
Carton Lot	3 pcs					
Included Accessories	1x Power Cord			1x Power Cord		

	CS1182D	CS1184D	CS1188D	CS1142D	CS1144D	CS1148D
Ports	2	4	8	2	4	8
PC Video Connector	DVI					
Console Video Connector	DVI					
Number of Displays	Single Display			Dual Display		
Video	3840 x 2160 @ 30 Hz*; DVI Dual Link: 2560 x 1600; DVI Single Link: 1920 x 1200; DVI-A: 2048 x 1536			3840 x 2160 @ 30 Hz*; DVI Dual Link: 2560 x 1600; DVI Single Link: 1920 x 1200; DVI-A: 2048 x 1536		
Console Keyboard / Mouse Interface	PS/2, USB			PS/2, USB		
CAC Port	Yes			Yes		
Audio	analog speaker only			analog speaker only		
Keyboard / Mouse Emulation	USB			USB		
I/P Rating	100–240V AC; 50-60Hz; 1A			100–240V AC; 50-60Hz; 1A		
Power Consumption	AC110V: 4.4W; AC220V: 4.4W	AC110V: 5.4W; AC220V: 5.4W	AC110V: 8.3W; AC220V: 8.2W	AC110V: 5.8W; AC220V: 5.6W	AC110V: 8.2W; AC220V: 7.8W	AC110V: 17.6W; AC220V: 17.7W
Environmental						
Operating Temperature	0 – 50°C			0 – 50°C		
Storage Temperature	-20 – 60°C			-20 – 60°C		
Humidity	0 – 80% RH, Non-condensing			0 – 80% RH, Non-condensing		
Physical Properties						
Housing	Metal			Metal		
Weight	1.79 kg (3.94 lb)	1.80 kg (3.96 lb)	3.35 kg (7.38 lb)	2.14 kg (4.71 lb)	2.18 kg (4.8 lb)	3.34 kg (7.36 lb)
Dimensions (L x W x H)	33.50 x 16.43 x 4.40 cm (13.19 x 6.47 x 1.73 in.)	33.50 x 16.43 x 4.40 cm (13.19 x 6.47 x 1.73 in.)	43.24 x 20.49 x 6.55 cm (17.02 x 8.07 x 2.58 in.)	33.50 x 16.39 x 6.55 cm (13.19 x 6.45 x 2.58 in.)	33.50 x 16.39 x 6.55 cm (13.19 x 6.45 x 2.58 in.)	43.24 x 20.49 x 6.55 cm (17.02 x 8.07 x 2.58 in.)
Carton Lot	3 pcs					
Included Accessories	1x Power Cord			1x Power Cord		

Note: * DVI Secure KVM Switches offer up to 3840 x 2160 @ 30Hz video output on compatible HDMI-interfaced monitors/computers with ATEN DVI-to-HDMI KVM cables.

Secure KVM Accessories

Image	Part No.	Product Name	Compatible products
	2L-7D02UDX2	1.8M USB DVI-D Dual Link Secure KVM Cable Kit	CS1188D, CS1184D, CS1182D
	2L-7D02DHX2	1.8M USB HDMI to DVI-D Secure KVM Cable Kit	CS1188D, CS1184D, CS1182D
	2L-7D02UDX3	1.8M USB DVI-D Dual Link Dual Display Secure KVM Cable Kit	CS1148D, CS1144D, CS1142D
	2L-7D02UHX4	1.8M USB HDMI Secure KVM Cable Kit	CS1188H, CS1184H, CS1182H
	2L-7D02UHX5	1.8M USB HDMI Dual Display Secure KVM Cable Kit	CS1148H, CS1144H, CS1142H
	2L-7D02UDPX4	1.8M USB DisplayPort Secure KVM Cable Kit	CS1188DP, CS1184DP, CS1182DP
	2L-7D02UDPX5	1.8M USB DisplayPort Dual Display Secure KVM Cable Kit	CS1148DP, CS1144DP, CS1142DP
	2L-7D03UDX4	3M USB DVI-D Dual Link Secure KVM Cable Kit	CS1188D, CS1184D, CS1182D

Image	Part No.	Product Name	Compatible products
	2L-7D03UDX5	3M USB DVI-D Dual Link Dual Display Secure KVM Cable Kit	CS1148D, CS1144D, CS1142D
	2L-7D03UHX4	3M USB HDMI Secure KVM Cable Kit	CS1188H, CS1184H, CS1182H
	2L-7D03UHX5	3M USB HDMI Dual Display Secure KVM Cable Kit	CS1148H, CS1144H, CS1142H
	2L-7D03UDPX4	3M USB DisplayPort Secure KVM Cable Kit	CS1188DP, CS1184DP, CS1182DP
	2L-7D03UDPX5	3M USB DisplayPort Dual Display Secure KVM Cable Kit	CS1148DP, CS1144DP, CS1142DP
	2X-045G	2/4-Port Single Display Secure KVM Rack Mount Kit	CS1182DP, CS1184DP, CS1182H, CS1184H, CS1182D, CS1184D
	2X-046G	2/4-Port Dual Display Secure KVM Rack Mount Kit	CS1142DP, CS1144DP, CS1142H, CS1144H, CS1142D, CS1144D
	2X-047G	8-Port Single/Dual Display Secure KVM Rack Mount Kit	CS1188DP, CS1148DP, CS1188H, CS1148H, CS1188D, CS1148D

LCD KVM Switches

ATEN LCD KVM switches offer a space-saving, streamlined approach to KVM switch technology by integrating a TFT-LCD panel, full keyboard, and touchpad in a 1U housing. The TFT-LCD display is built into the cover; the keyboard and touchpad are built into the base. Slide the KVM module out, lift the cover up, and you are ready to work.



4

- **Ultra Short Depth Design**

ATEN ultra short depth design is applied in both single rail and dual rail models, fits all 19" equipment cabinets, and is especially suitable for shallow racks and any computer room where space is at a premium.

- **Dual Rail Flexibility**

The dual rail design enables the LCD monitor, keyboard, and touchpad to operate independently of each other. To maximize space utilization, the keyboard and touchpad modules can slide back to "hide away" when not in use, while the thin profile LCD monitor rotates back, flush against the rack, to allow for convenient monitoring of computer activity.

- **Exclusive LED Illumination Light**

ATEN's LCD KVM features an LED illumination light, designed to illuminate the keyboard and touchpad in a dark room. The LED illumination light is ON by default as you lift up the LCD and can be switched OFF by pushbutton if needed. The unique design serves to brighten low-light conditions and provide a more flexible working environment.

- **Enhanced Console Control**

The LCD KVM switches contain a second console to provide administrators with the convenience and flexibility of using a standard keyboard / monitor / mouse console. It also allows two users to share access and control of the servers.

- **Dual Interface – Multi Platform Support**

The LCD KVM switches support optional custom cables or converters with PS/2 and USB interfaces. They are also interoperable on different OS systems (Windows, Mac, Sun, or Linux).

- **Space Efficient All-in-One Design**

ATEN's LCD KVM switches feature a retractable keyboard, LCD monitor and touchpad with an 8- or 16-port KVM switch with 1U housing.

- **Easy Installation Options**


All LCD KVM switches come with a Standard Rack Mount Kit which requires two people to complete the installation. The Single Person - Easy Installation Rack Mount Kit is available as a separate purchase.

- **Convenient Security via Fingerprint Identification**

Each user can scan up to 4 fingers (available on models with Fingerprint Identification Reader only).

Note:

The features highlighted above are not available in all products. Please refer to each product page for more details. Product information is subject to change without prior notice.

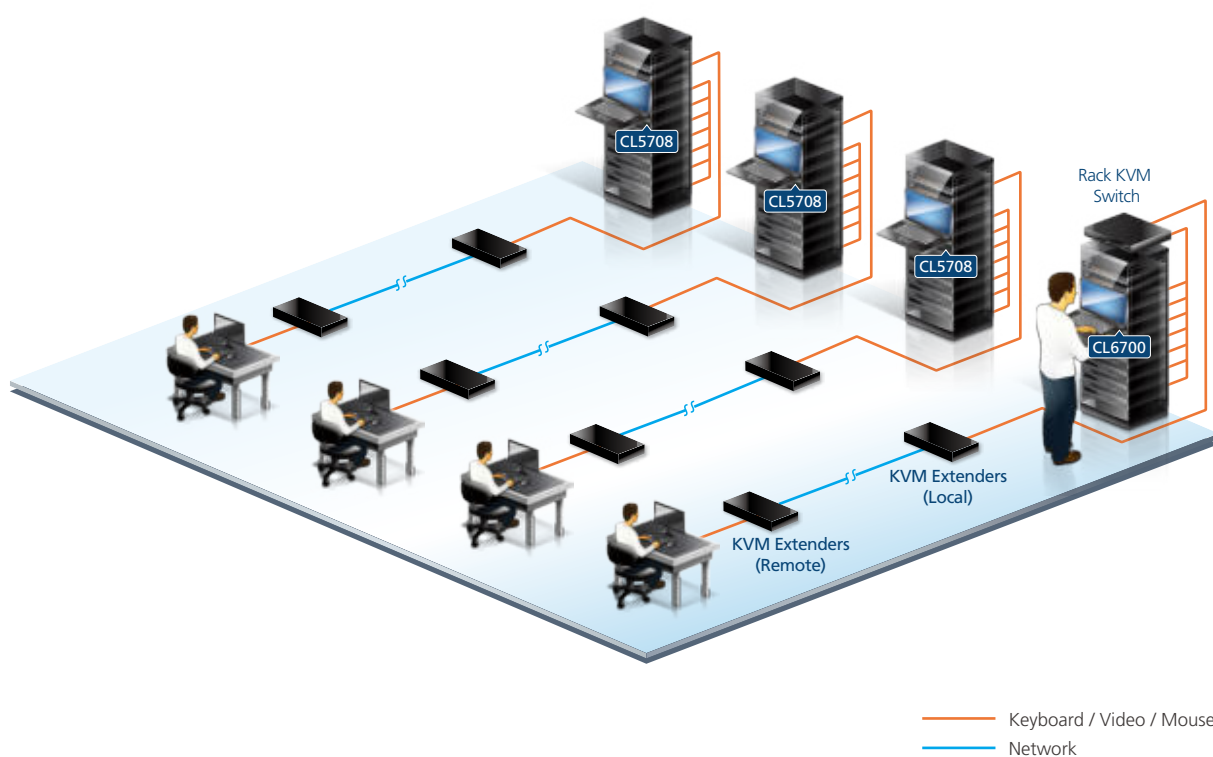

Feature Comparison

Model No.		CL3884NW	CL5708I*	CL5716I*
TFT-LCD Size		18.5" (1920 x 1080 @ 60 Hz)	CL5708IM: 17" CL5708IN: 19" (1280 x 1024 @ 75 Hz)	CL5716IM: 17" CL5716IN: 19" (1280 x 1024 @ 75 Hz)
Ports		4	8	16
Interface	Keyboard, Mouse	USB	PS/2-USB	PS/2-USB
	Video	HDMI	VGA	VGA
Expansion		16 (Cascade)	128 (Daisy-chain)	256 (Daisy-chain)
External Console		USB, HDMI	PS/2, USB, HDB-15 (SPHD)	PS/2, USB, HDB-15 (SPHD)
Keyboard Emulation		Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun
Single Rail/Dual Rail		Dual Rail	Single Rail	Single Rail
Port Selection		OSD, Hotkey, Pushbutton, RS-232 commands	OSD, Hotkey, Pushbutton	OSD, Hotkey, Pushbutton
LCD KVM Depth (cm)**		63.10	CL5708IM: 64.27 CL5708IN: 68.92	CL5716IM: 64.27 CL5716IN: 68.92

Model No.		CL3800	CL3700	CL3100
LCD Module		CL3800NW: 18.5" (1920 x 1080 @ 60 Hz) CL3800NX: 18.5" (1366 x 768 @ 60 Hz)	CL3700NW: 18.5" (1920 x 1080 @ 60 Hz) CL3700NX: 18.5" (1366 x 768 @ 60 Hz)	CL3100NX: 18.5" (1366 x 768 @ 60 Hz)
Ports		1	1	1
Interface	Keyboard, Mouse	USB	USB	USB
	Video	HDMI, DVI-D, VGA	HDMI	VGA
Expansion		N/A	N/A	N/A
External Console		USB, HDMI, DVI-D, HDB-15	USB, HDMI	USB, HDB-15
Keyboard Emulation		Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun
Single Rail/Dual Rail		Dual Rail	Single Rail	Single Rail
Console Selection		Hotkey	Hotkey	Hotkey
LCD KVM Depth (cm)**		51.42	47.70	47.70

Model No.		CL6700	CL3000	CL5800	CL1000
TFT-LCD Size		CL6700MW: 17.3" (1920 x 1080 @ 60 Hz)	CL3000N: 19" (1280 x 1024 @ 75 Hz)	CL5800N: 19" (1280 x 1024 @ 75 Hz)	CL1000M: 17" CL1000N: 19" (1280 x 1024 @ 75 Hz)
Ports		1	1	1	1
Interface	Keyboard, Mouse	USB	PS/2-USB	PS/2-USB	PS/2-USB
	Video	HDMI, DVI-D, VGA	VGA	VGA	VGA
Expansion		N/A	N/A	N/A	N/A
External Console		USB, HDMI, DVI-D, HDB-15	PS/2, USB, HDB-15	PS/2, USB, HDB-15	N/A
Keyboard Emulation		Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun	Windows, Linux
Single Rail/Dual Rail		Single Rail	Single Rail	Dual Rail	Single Rail
Console Selection		Hotkey	Hotkey	Hotkey	N/A
LCD KVM Depth (cm)**		58.92	58.92	68.04	CL1000M: 53.83 CL1000N: 58.52

Note:

*CL5708I / CL5716I has over IP function.

**Please refer to 4-23 for optional rack mount kits for different rack depth.

Model No.		CL3108	CL3116	CL1308	CL1316
TFT-LCD Size		CL3108NX: 18.5" (1366 x 768 @ 60 Hz)	CL3116NX: 18.5" (1366 x 768 @ 60 Hz)	CL1308N: 19" (1280 x 1024 @ 75 Hz)	CL1316N: 19" (1280 x 1024 @ 75 Hz)
Ports		8	16	8	16
Interface	Keyboard, Mouse	PS/2-USB	PS/2-USB	PS/2-USB	PS/2-USB
	Video	VGA	VGA	VGA	VGA
Expansion		128 (Cascade)	256 (Cascade)	128 (Cascade)	256 (Cascade)
External Console		N/A	N/A	N/A	N/A
Keyboard Emulation		Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun
Single Rail/Dual Rail		Single Rail	Single Rail	Single Rail	Single Rail
Port Selection		OSD, Hotkey, Pushbutton	OSD, Hotkey, Pushbutton	OSD, Hotkey, Pushbutton	OSD, Hotkey, Pushbutton
LCD KVM Depth (cm)**		63.17	63.17	68.92	68.92

Model No.		CL6708	CL5708*	CL5716*
TFT-LCD Size		CL6708MW: 17.3" (1920 x 1080 @ 60 Hz)	CL5708M: 17" CL5708N: 19" (1280 x 1024 @ 75 Hz)	CL5716M: 17" CL5716N: 19" (1280 x 1024 @ 75 Hz)
Ports		8	8	16
Interface	Keyboard, Mouse	USB	PS/2-USB	PS/2-USB
	Video	DVI-I	VGA	VGA
Expansion		64 (Cascade)	256 (Daisy-chain)	512 (Daisy-chain)
External Console		USB, DVI-I	PS/2, USB, HDB-15 (SPHD)	PS/2, USB, HDB-15 (SPHD)
Keyboard Emulation		Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun
Single Rail/Dual Rail		Single Rail	Single Rail	Single Rail
Port Selection		OSD, Hotkey, Pushbutton	OSD, Hotkey, Pushbutton	OSD, Hotkey, Pushbutton
LCD KVM Depth (cm)**		68.92	CL5708M: 64.27 CL5708N: 68.92	CL5716M: 64.27 CL5716N: 68.92

Model No.		CL5808	CL5816	CL1008	CL1016
TFT-LCD Size		CL5808N: 19" (1280 x 1024 @ 75 Hz)	CL5816N: 19" (1280 x 1024 @ 75 Hz)	CL1008M: 17" (1280 x 1024 @ 75 Hz)	CL1016M: 17" (1280 x 1024 @ 75 Hz)
Ports		8	16	8	16
Interface	Keyboard, Mouse	PS/2-USB	PS/2-USB	PS/2-USB	PS/2-USB
	Video	VGA	VGA	VGA	VGA
Expansion		256 (Daisy-chain)	512 (Daisy-chain)	128 (Daisy-chain)	256 (Daisy-chain)
External Console		PS/2, USB, HDB-15 (SPHD)	PS/2, USB, HDB-15 (SPHD)	N/A	N/A
Keyboard Emulation		Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun	Windows, Linux	Windows, Linux
Single Rail/Dual Rail		Dual Rail	Dual Rail	Single Rail	Single Rail
Port Selection		OSD, Hotkey, Pushbutton	OSD, Hotkey, Pushbutton	OSD, Hotkey, Pushbutton	OSD, Hotkey, Pushbutton
LCD KVM Depth (cm)**		68.04	68.04	64.02	64.02

Note:

*Fingerprint reader version is available.

**Please refer to 4-23 for optional rack mount kits for different rack depth.

CL3884NW

4-Port USB HDMI Multi-View Dual Rail WideScreen LCD KVM Switch



Front



Rear



Features

- **Multi-view console** controls up to four video sources on one screen with display modes including Quad View, Picture in Picture (PiP), Picture by Picture (PbP), and Picture on Picture (PoP)
- **Exclusive LED illumination light** – designed by ATEN to illuminate the keyboard and touchpad to allow visibility in low-light conditions
- Integrated KVM console with dual rail design and a 18.5" LED-backlit LCD monitor allows you to work with your rack-mounting equipment in narrow spaces
- **Dual rail design** allows LED-backlit LCD monitor and keyboard/touchpad modules to operate independently
- Supports an extra console via USB/HDMI connectors for up to two console displays
- Display mode layout customization
- Superior video quality – 1920 x 1080 @ 60Hz
- Computer selection via pushbuttons, hotkeys, OSD, and RS-232 commands
- Boundless Switching – simply moves the mouse cursor across windows to switch to other video sources
- **Video DynaSync™** – exclusive ATEN technology eliminates boot-up display problems and optimizes the resolution when switching among different sources
- Quick Access Toolbar – intuitive user interface for editing
- Easily resizes and/or repositions any PiP or PbP to suit users' viewing needs
- **EDID Expert™** – selects optimum EDID settings for smooth power-up, high-quality display and use of the best video resolution across different screens
- Cascade up to 2 levels – controls up to 16 computers (with up to 4 x 4 Multi-View mode)
- Additional hot-pluggable USB peripheral port on front panel
- Auto Scan mode – enables continuous monitoring of user-selected computers
- Broadcast mode – operations simultaneously performed on all selected computers, such as software installation and upgrading, system-wide shutdown, etc.

- ▶ **Quad View** displays all four computers / video sources on the display




- **PiP Dual** – shows two computers / video sources, with only half of the actual display visible



- **PiP Triple** – shows three computers / video sources at one time



- **PiP Quad** – shows four computers / video sources at one time, but unlike in Quad View, one display takes up the whole screen, while the other three displays are occupying only the right side of the screen



Note: The screen size of the each display depends on the resolution of the computer / video source connected to the port.

Specifications

CL3884NW	
Computer Connections	
Direct	4
Maximum	16 (via Cascade)
Port Selection	OSD, Hotkey, Pushbutton, RS-232 commands
Connectors	
KVM Ports	4 x HDMI Female, 4 x USB Type B Female, 4 x 3.5mm Audio Jack Female (Green)
USB Port	1 x USB Type A Female (Front)
Serial	1 x RJ-45 Female
Power	1 x IEC 60320/C14
External Console Ports	1 x HDMI Female, 2 x USB Type A Female, 1 x 3.5mm Audio Jack Female (Green)
LEDs	
Power	1 (Dark Green)
Lock	1 x Num Lock (Green), 1 x Caps Lock (Green), 1 x Scroll Lock (Green)
LCD Module	18.5" (1920 x 1080 @ 60Hz)
Emulation	
Keyboard / Mouse	USB
Maximum Input Power Rating	100-240V AC, 50-60Hz, 1A
Power Consumption	AC110V: 35.2W; AC220V: 35.7W
Environmental	
Operating Temperature	0 – 40°C
Storage Temperature	-20 – 60°C
Humidity	0 – 85% RH, Non-condensing
Physical Properties	
Housing	Metal
Weight	11.20 kg (24.67 lb)
Dimensions (L x W x H)	48.06 x 63.10 x 4.28 cm (18.92 x 24.84 x 1.69 in.)
Body Dimensions (L x W x H)	44.92 x 58.40 x 4.28 cm (17.68 x 22.99 x 1.69 in.)
Carton lot	1 pc
Included Accessories	2x USB HDMI KVM Cables; 2x L Brackets; 1x Power Cord; 1x Standard Mounting Kit

Note: Body Dimensions exclude I/O ports, handles, and mounting brackets.

Optional Accessories

Type	Part No. / Spec.	Page No.
USB HDMI KVM Cables	2L-7D02UH (1.8 m)	12-3
LockPro-HDMI Cable Lock	2X-EA12	12-4
Rack Mount Kits	Please refer to page 4-23	4-23

CL5708I / CL5716I

1-Local/Remote Share Access 8/16-Port PS/2-USB VGA Single Rail LCD KVM over IP Switch



Front



Rear

• CL5708I



• CL5716I



Features

- **Exclusive LED illumination light** – designed by ATEN to illuminate the keyboard and touchpad to allow visibility in low-light conditions
- Daisy chain up to 15 additional units – controls up to 128/256 computers from a single console
- Integrated KVM console with 17" or 19" LED-backlit LCD monitor in a single rail housing
- 1 remote bus for KVM over IP access – allowing IT administrators to remotely monitor and control up to 8/16 servers
- Mouse DynaSync™ – automatically synchronizes the local and remote mouse movements
- Front panel USB port allows each computer to access USB peripherals
- Dual Interface – supports computers and console with PS/2 or USB keyboards and mice
- Supports multimedia USB keyboards for Windows, Mac and Sun
- Superior video quality – up to 1280 x 1024 @ 75Hz; DDC2B for the local LCD module; up to 1920 x 1200 @ 60Hz / 24 bit color depth for remote sessions
- Adjustable video quality for flexible adaptation to diverse network environments
- Two level password security – only authorized users can view and control computers; up to 64 user accounts with separate profiles for each
- Integration with CC2000 Centralized Management Software
- Broadcast mode: operations from the keyboard can be simultaneously performed on all selected computers on the installation (software installation, system-wide shutdown, etc.)
- Panel array mode enables user to monitor multiple servers from single screen at the same time
- IPv6 capable
- Message board – convenient communication for remote users
- Secure keyboard / mouse / video transmission via RC4 128 bit encryption
- Supports TLS 1.2 data encryption and RSA 2048 bit certificates for secure user logins from a browser
- External (Remote) authentication support: RADIUS, LDAP, LDAPS, MS Active Directory
- Support for IP/MAC Filter
- Local and remote access logged and authenticated
- BIOS-level access
- Keyboard Language support: English(US), English(UK), French, German, German(Swiss), Greek, Hungarian, Italian, Japanese, Korean, Russian, Spanish, Swedish, and Traditional Chinese

Specifications

	CL5708IM / CL5708IN	CL5716IM / CL5716IN
Computer Connections		
Direct	8	16
Maximum	128 (via Daisy-chain)	256 (via Daisy-chain)
Console Connections		
Local / Remote	1 (Share Remote Bus)	
Port Selection	OSD, Hotkey, Pushbutton	
Connectors		
KVM Ports	8 x SPHD Female	16 x SPHD Female
External Mouse Port	1 x USB Type A Female (Front)	
Daisy Chain Ports	1 x DB-25 Male	
Firmware Upgrade	1 x RJ-11 Female	
USB Port	1 x USB Type A Female	
LAN Ports	1 x RJ-45 Female	
Power	1 x IEC 60320/C14	
External Console Ports	1 x SPHD Male (Yellow)	
LEDs		
Port ID	1 x 2-digit, 7-segment (Yellow)	
Station ID	1 x 2-digit, 7-segment (Yellow)	
Power	1 (Dark Green)	
Lock	1 x Num Lock (Green), 1 x Caps Lock (Green), 1 x Scroll Lock (Green)	
Online	8 (Orange)	16 (Orange)
10/100 Mbps	1 (Orange / Green)	
LCD Module	CL5708IM: 17", CL5708IN: 19" (1280 x 1024 @ 75Hz)	CL5716IM: 17", CL5716IN: 19" (1280 x 1024 @ 75Hz)
Emulation		
Keyboard / Mouse	PS/2, USB	
Maximum Input Power Rating	100-240V AC, 50/60Hz, 1A	
Power Consumption	CL5708IM: AC110V: 26.8W; AC220V: 27.7W CL5708IN: AC110V: 29W; AC220V: 29.8W	CL5716IM: AC110V: 26.8W; AC220V: 27.7W CL5716IN: AC110V: 30.8W; AC220V: 31.8W
Environmental		
Operating Temperature	0 – 50°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal + Plastic	
Weight	CL5708IM: 13.49 kg (29.71 lb) CL5708IN: 13.41 kg (29.54 lb)	CL5716IM: 13.61 kg (29.98 lb) CL5716IN: 13.67 kg (30.11 lb)
Dimensions (L x W x H)	CL5708IM: 48.00 x 64.27 x 4.40 cm (18.9 x 25.3 x 1.73 in.) CL5708IN: 48.00 x 68.92 x 4.40 cm (18.9 x 27.13 x 1.73 in.)	CL5716IM: 48.00 x 64.27 x 4.40 cm (18.9 x 25.3 x 1.73 in.) CL5716IN: 48.00 x 68.92 x 4.40 cm (18.9 x 27.13 x 1.73 in.)
Carton Lot	1 pc	
Included Accessories	2x USB KVM Cables; 1x Custom Console Cable; 1x Firmware Upgrade Cable; 1x Power Cord; 1x Standard Mounting Kit	

Optional Accessories

Type	Part No. / Spec.	Page No.
USB KVM Cables	2L-5201U (1.2 m), 2L-5202U (1.8 m), 2L-5203U (3 m), 2L-5205U (5 m)	12-2
PS/2 KVM Cables	2L-5201P (1.2 m), 2L-5202P (1.8 m), 2L-5203P (3 m), 2L-5206P (6 m), 2L-5210P (10 m)	12-1
Daisy-chain Cables	2L-1700 (0.6 m), 2L-1701 (1.8 m), 2L-1703 (3 m), 2L-1705 (5 m), 2L-1715 (15 m)	12-3
Rack Mount Kits	Please refer to page 4-23	4-23

CL3800

Ultra Short Depth Dual Rail WideScreen LCD Console (USB, HDMI / DVI / VGA)



Shared Access 2 Local Users	2nd Console HDMI, DVI, VGA, USB	External Mouse USB	Audio Enabled	LED Monitor 18.5"	LED Illumination Light
--------------------------------	------------------------------------	-----------------------	---------------	----------------------	------------------------

Front



Rear



Features

- **Exclusive LED illumination light** – designed by ATEN to illuminate the keyboard and touchpad to allow visibility in low-light conditions
- **Dual rail design** allows LED-backlit LCD monitor and keyboard/touchpad modules to operate independently
- Integrated KVM console with **short depth** dual rail design and a 18.5" LED-backlit LCD monitor allows you to work with your rack-mounting equipment in narrow spaces
- Supports 3 types of video inputs (HDMI / DVI / VGA)
- Supports an external console with USB / HDMI / DVI / VGA connectors for flexible operation
- Additional hot-pluggable USB mouse port on front panel (also functions as a USB peripheral port)
- Standard 105-key keyboard

Specifications

	CL3800NW	CL3800NX
Computer Connections	1	
Console Selection	Hotkey	
Connectors		
KVM Ports	1 x HDMI Female, 1 x DVI-D Female (White), 1 x HDB-15 Male (Blue), 1 x USB Type B Female, 1 x 3.5mm Audio Jack Female (Green)	
External Mouse / USB Port	1 x USB Type A Female (Front)	
Firmware Upgrade	1 x 3.5mm Audio Jack Female (Black)	
Power	1 x IEC 60320/C14	
External Console Ports	1 x HDMI Female, 1 x DVI-D Female (White), 1 x HDB-15 Female (Blue), 2 x USB Type A Female, 1 x 3.5mm Audio Jack Female (Green)	
LEDs		
Power	1 x KVM Console (Dark Green), 1 x LCD (Orange)	
Lock	1 x Num Lock (Green), 1 x Caps Lock (Green), 1 x Scroll Lock (Green)	
LCD Module	18.5" (1920 x 1080 @ 60Hz)	18.5" (1366 x 768 @ 60Hz)
Emulation		
Keyboard / Mouse	USB	
Maximum Input Power Rating	100–240V AC, 50-60Hz, 1A	
Power Consumption	AC110V: 26.6W; AC220V: 26.8W	AC110V: 18.3W; AC220V: 17.8W
Environmental		
Operating Temperature	0 – 40°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal + Plastic	
Weight	9.61 kg (21.17 lb)	9.79 kg (21.56 lb)
Dimensions (L x W x H)	48.06 x 51.42 x 4.28 cm (18.92 x 20.24 x 1.69 in.)	
Body Dimensions (L x W x H)	44.92 x 46.74 x 4.28 cm (17.69 x 18.40 x 1.69 in.)	
Carton Lot	1 pc	
Included Accessories	1x USB HDMI KVM Cable; 1x Firmware Upgrade Cable; 1x Power Cord; 2x L Brackets; 1x Standard Mounting Kit	

Note: Body Dimensions exclude I/O ports, handles, and mounting brackets.

Optional Accessories

Type	Part No. / Spec.	Page No.
USB HDMI KVM Cable	2L-7D02UH (1.8 m)	12-3
USB DVI KVM Cables	2L-7D02U (1.8 m), 2L-7D03U (3 m), 2L-7D05U (5 m)	12-3
USB HDMI to DVI-D KVM Cable	2L-7D02DH (1.8 m)	12-3
LockPro-HDMI Cable Lock	2X-EA12	12-4
Rack Mount Kits	Please refer to page 4-23	4-23
2-in-1U Rack Mount Kits	2K-0001 2K-0002 2K-0007	4-24

CL3700

Ultra Short Depth Single Rail WideScreen LCD Console (USB, HDMI)



Shared Access	2nd Console	External Mouse	LED Monitor	LED Illumination Light
2 Local Users	HDMI, USB	USB	18.5"	

Front



Rear



Features

- **Exclusive LED illumination light** – designed by ATEN to illuminate the keyboard and touchpad to allow visibility in low-light conditions
- Integrated KVM console with **short depth** single rail design and a 18.5" LED-backlit LCD monitor allows you to work with your rack-mounting equipment in narrow spaces
- Supports HDMI video input, USB keyboard and mouse
- Supports an external console with USB / HDMI connectors
- Additional hot-pluggable USB mouse port on front panel (also functions as a USB peripheral port)
- Standard 105-key keyboard

Specifications

	CL3700NW	CL3700NX
Computer Connections	1	
Console Selection	Hotkey	
Connectors		
KVM Ports	1 x HDMI Female, 1 x USB Type B Female	
External Mouse / USB Port	1 x USB Type A Female (Front)	
Firmware Upgrade	1 x 3.5mm Audio Jack Female (Black)	
Power	1 x IEC 60320/C14	
External Console Ports	1 x HDMI Female, 2 x USB Type A Female	
LEDs		
Power	1 x KVM Console (Dark Green), 1 x LCD (Orange)	
Lock	1 x Num Lock (Green), 1 x Caps Lock (Green), 1 x Scroll Lock (Green)	
LCD Module	18.5" (1920 x 1080 @ 60Hz)	18.5" (1366 x 768 @ 60Hz)
Emulation		
Keyboard / Mouse	USB	
Maximum Input Power Rating	100–240V AC, 50-60 Hz, 1A	
Power Consumption	AC110V: 23.3W; AC220V: 23.9W	AC110V: 13.6W; AC220V: 13.5W
Environmental		
Operating Temperature	0 – 40°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal + Plastic	
Weight	9.01 kg (19.85 lb)	9.03 kg (19.89 lb)
Dimensions (L x W x H)	48.06 x 47.70 x 4.28 cm (18.92 x 18.78 x 1.69 in.)	
Body Dimensions (L x W x H)	44.92 x 43.00 x 4.28 cm (17.69 x 16.93 x 1.69 in.)	
Carton Lot	1 pc	
Included Accessories	1x USB HDMI KVM Cable; 1x Firmware Upgrade Cable; 1x Power Cord; 1x Standard Mounting Kit	

Note: Body Dimensions exclude I/O ports, handles, and mounting brackets.

Optional Accessories

Type	Part No. / Spec.	Page No.
USB HDMI KVM Cable	2L-7D02UH (1.8 m)	12-3
LockPro-HDMI Cable Lock	2X-EA12	12-4
Rack Mount Kits	Please refer to page 4-23	4-23
2-in-1U Rack Mount Kits	2K-0001 2K-0002 2K-0007	4-24

CL3100

Ultra Short Depth Single Rail WideScreen LCD Console (USB, VGA)



Front



Rear



Features

- **Exclusive LED illumination light** – designed by ATEN to illuminate the keyboard and touchpad to allow visibility in low-light conditions
- Integrated KVM console with **short depth** single rail design and a 18.5" LED-backlit LCD monitor allows you to work with your rack-mounting equipment in narrow spaces
- Supports an external console with USB / VGA connectors
- Additional hot-pluggable USB mouse port on front panel (also functions as a USB peripheral port)
- Standard 105-key keyboard

Specifications

	CL3100NX
Computer Connections	1
Console Selection	Hotkey
Connectors	
KVM Ports	1 x SPHD Female (Yellow) 1 x 3.5mm Audio Jack Female (Green)
External Mouse / USB Port	1 x USB Type A Female (Front)
Firmware Upgrade	1 x 3.5mm Audio Jack Female (Black)
Power	1 x IEC 60320/C14
External Console Ports	1 x HDB-15 Female (Blue) 2 x USB Type A Female 1 x 3.5mm Audio Jack Female (Green)
LEDs	
Power	1 x KVM Console (Dark Green) 1 x LCD (Orange)
Lock	1 x Num Lock (Green) 1 x Caps Lock (Green) 1 x Scroll Lock (Green)
LCD Module	18.5" (1366 x 768 @ 60Hz)
Emulation	
Keyboard / Mouse	USB
Maximum Input Power Rating	100–240V AC, 50–60Hz, 1A
Power Consumption	AC110V: 13.8W; AC220V: 14.1W
Environmental	
Operating Temperature	0 – 40°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Metal + Plastic
Weight	9.07 kg (19.98 lb)
Dimensions (L x W x H)	48.06 x 47.70 x 4.28 cm (18.92 x 18.78 x 1.69 in.)
Body Dimensions (L x W x H)	44.92 x 43.00 x 4.28 cm (17.69 x 16.93 x 1.69 in.)
Carton Lot	1 pc
Included Accessories	1x USB VGA KVM Cable; 1x Firmware Upgrade Cable; 1x Power Cord; 1x Standard Mounting Kit

Note: Body Dimensions exclude I/O ports, handles, and mounting brackets.

Optional Accessories

Type	Part No. / Spec.	Page No.
USB VGA KVM Cables	2L-5201U / 2L-5301U (1.2 m) 2L-5202U / 2L-5302U (1.8 m) 2L-5203U / 2L-5303U (3 m) 2L-5205U / 2L-5305U (5 m)	12-2
Rack Mount Kits	Please refer to page 4-23	4-23
2-in-1U Rack Mount Kits	2K-0001 2K-0002 2K-0007	4-24

CL6700

Single Rail LCD Console (USB, HDMI / DVI / VGA)



Front



Rear



Features

- **Exclusive LED illumination light** – designed by ATEN to illuminate the keyboard and touchpad to allow visibility in low-light conditions
- Integrated KVM console with a 17.3" Widescreen Full HD LED-backlit LCD monitor in a single rail housing
- Supports an external console with USB / HDMI / DVI / VGA connectors
- Additional hot-pluggable USB mouse port on front panel (also functions as a USB peripheral port)
- DDC emulation – video settings of attached computers are automatically adjusted for optimal output to the monitor
- Standard 105-key keyboard

Specifications

	CL6700MW
Computer Connections	1
Console Selection	Hotkey
Connectors	
KVM Ports	1 x HDMI Female, 1 x DVI-D Female (White), 1 x HDB-15 Male (Blue), 1 x USB Type B Female, 1 x 3.5mm Audio Jack Female (Green)
External Mouse / USB Port	1 x USB Type A Female (Front)
Firmware Upgrade	1 x RJ-11 Female
Power	1 x IEC 60320/C14
External Console Ports	1 x HDMI Female, 1 x DVI-D Female (White), 1 x HDB-15 Female (Blue), 2 x USB Type A Female, 1 x 3.5mm Audio Jack Female (Green)
LEDs	
Power	1 x KVM Console (Dark Green) 1 x LCD (Orange)
Lock	1 x Num Lock (Green) 1 x Caps Lock (Green) 1 x Scroll Lock (Green)
LCD Module	17.3" (1920 x 1080 @ 60Hz)
Emulation	
Keyboard / Mouse	USB
Maximum Input Power Rating	100–240V AC, 50-60Hz; 1A
Power Consumption	AC110V: 21.2W; AC220V: 20.8W
Environmental	
Operating Temperature	0 – 40°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Metal
Weight	11.38 kg (25.07 lb)
Dimensions (L x W x H)	48.00 x 58.92 x 4.40 cm (18.9 x 23.2 x 1.73 in.)
Carton Lot	1 pc
Included Accessories	1x USB DVI KVM Cable; 1x Firmware Upgrade Cable; 1x Power Cord; 1x Standard Mounting Kit

Optional Accessories

Type	Part No. / Spec.	Page No.
USB HDMI KVM Cable	2L-7D02UH (1.8 m)	12-3
USB DVI-D Single Link KVM Cables	2L-7D02U (1.8 m), 2L-7D03U (3 m), 2L-7D05U (5 m)	12-3
USB HDMI to DVI-D KVM Cable	2L-7D02DH (1.8 m)	12-3
Rack Mount Kits	Please refer to page 4-23	4-23

CL3000

Lightweight Single Rail LCD Console (PS/2-USB, VGA)



Front



Rear



Features

- **Exclusive LED illumination light** – designed by ATEN to illuminate the keyboard and touchpad to allow visibility in low-light conditions
- **MIL-STD-810G Certified**
- Green power LED-backlit LCD monitor saves energy
- Lightweight aluminum design for easier installation
- Integrated KVM console with a 19" LED-backlit LCD monitor in a single rail housing
- Additional hot-pluggable USB mouse port on front panel (also functions as a USB peripheral port)
- 1U high mountable rack
- Standard 105-key keyboard

Specifications

	CL3000N
Computer Connections	1
Console Selection	Hotkey
Connectors	
KVM Ports	1 x SPHD Female (Yellow)
External Mouse / USB Port	1 x USB Type A Female (Front)
Power	1 x IEC 60320/C14
External Console Ports	1 x HDB-15 Female (Blue), 2 x USB Type A Female, 1 x 6-pin Mini-DIN Female (Purple), 1 x 6-pin Mini-DIN Female (Green)
LEDs	
Power	1 x KVM Console (Dark Green), 1 x LCD (Orange)
Lock	1 x Num Lock (Green) 1 x Caps Lock (Green) 1 x Scroll Lock (Green)
LCD Module	19" (1280 x 1024 @ 75Hz, DDC2B)
Emulation	
Keyboard / Mouse	PS/2, USB
Maximum Input Power Rating	100–240V AC, 50-60Hz, 1A
Power Consumption	AC110V: 23.8W; AC220V: 25.4W
Environmental	
Operating Temperature	0 – 50°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Random Vibration Resistant Test	MIL-STD-810G Certified Test Conditions: <ul style="list-style-type: none"> • Frequency Range: 5-500Hz • Grams: Value X, Y axis 0.76Grms, Z axis 1.07Grms • Test Duration: 1 hour/per axis
Physical Properties	
Housing	Aluminum
Weight	9.00 kg (19.82 lb)
Dimensions (L x W x H)	48.00 x 58.92 x 4.40 cm (18.9 x 23.2 x 1.73 in.)
Carton Lot	1 pc
Included Accessories	1x USB KVM Cable; 1x Power Cord; 1x Standard Mounting Kit

Optional Accessories

Type	Part No. / Spec.	Page No.
USB VGA KVM Cables	2L-5201U (1.2 m), 2L-5202U (1.8 m), 2L-5203U (3 m), 2L-5205U (5 m)	12-2
PS/2 VGA KVM Cables	2L-5201P (1.2 m), 2L-5202P (1.8 m), 2L-5203P (3 m), 2L-5206P (6 m), 2L-5210P (10 m)	12-1
Rack Mount Kits	Please refer to page 4-23	4-23

CL5800

Dual Rail LCD Console (PS/2-USB, VGA)



Front



Rear



Features

- **Exclusive LED illumination light** – designed by ATEN to illuminate the keyboard and touchpad to allow visibility in low-light conditions
- **Dual rail design** allows LED-backlit LCD monitor and keyboard / touchpad modules to operate independently
- Integrated KVM console with a 19" LED-backlit LCD monitor in a dual rail housing
- Additional hot-pluggable USB mouse port on front panel (also functions as a USB peripheral port)
- 1U high mountable rack
- Standard 105-key keyboard

Specifications

	CL5800N
Computer Connections	1
Console Selection	Hotkey
Connectors	
KVM Ports	1 x SPHD Female (Yellow)
External Mouse / USB Port	1 x USB Type A Female (Front)
Firmware Upgrade	1 x RJ-11 Female
Power	1 x IEC 60320/C14
External Console Ports	1 x HDB-15 Female (Blue) 2 x USB Type A Female 1 x 6-pin Mini-DIN Female (Purple) 1 x 6-pin Mini-DIN Female (Green)
LEDs	
Power	1 x KVM Console (Dark Green) 1 x LCD (Orange)
Lock	1 x Num Lock (Green) 1 x Caps Lock (Green) 1 x Scroll Lock (Green)
LCD Module	19" (1280 x 1024 @ 75Hz; DDC2B)
Emulation	
Keyboard / Mouse	PS/2, USB
Maximum Input Power Rating	100-240V AC, 50/60Hz, 1A
Power Consumption	AC110V: 22.2W; AC220V: 22.9W
Environmental	
Operating Temperature	0 – 50°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Metal
Weight	14.27 kg (31.43 lb)
Dimensions (L x W x H)	48.00 x 68.04 x 4.40 cm (18.9 x 26.79 x 1.73 in.)
Carton Lot	1 pc
Included Accessories	1x USB KVM Cable; 1x Firmware Upgrade Cable; 1x Power Cord; 2x L Brackets; 1x Standard Mounting Kit

Optional Accessories

Type	Part No. / Spec.	Page No.
USB VGA KVM Cables	2L-5201U (1.2 m), 2L-5202U (1.8 m), 2L-5203U (3 m), 2L-5205U (5 m)	12-2
PS/2 VGA KVM Cables	2L-5201P (1.2 m), 2L-5202P (1.8 m), 2L-5203P (3 m), 2L-5206P (6 m), 2L-5210P (10 m)	12-1
Rack Mount Kits	Please refer to page 4-23	4-23

CL1000

Single Rail LCD Console (PS/2-USB, VGA)



Front

(17" / 19")



Rear

(17")



(19")



Features

- **Exclusive LED illumination light** – designed by ATEN to illuminate the keyboard and touchpad to allow visibility in low-light conditions
- The most popular ATEN LED-backlit LCD Console in a single rail housing
- 1U high mountable rack
- Adjustable depth to fit within a rack
- Standard 105-key keyboard

Note: Custom KVM cables or converters are available for USB support.

Specifications

	CL1000M	CL1000N
Computer Connections	1	
Connectors		
KVM (Computer) Ports	1 x SPHD Female (Yellow)	
Power	1 x IEC 60320/C14	
LEDs		
Power	1 x KVM Console (Dark Green) 1 x LCD (Orange)	
Lock	1 x Num Lock (Green) 1 x Caps Lock (Green) 1 x Scroll Lock (Green)	
LCD Module	17" (1280 x 1024 @ 75Hz)	19" (1280 x 1024 @ 75Hz)
Emulation		
Keyboard / Mouse	PS/2, USB (via 2L-520xUP cables)	
Maximum Input Power Rating	100-240V AC, 50/60Hz, 1A	
Power Consumption	AC110V: 19.6W; AC220V: 21.3W	AC110V: 29.2W; AC220V: 29.3W
Environmental		
Operating Temperature	0 – 50°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal + Plastic	
Weight	12.02 kg (26.48 lb)	11.06 kg (24.36 lb)
Dimensions (L x W x H)	48.00 x 53.83 x 4.40 cm (18.9 x 21.19 x 1.73 in.)	48.30 x 58.52 x 4.40 cm (19.02 x 23.04 x 1.73 in.)
Carton Lot	1 pc	
Included Accessories	1x USB KVM Cable; 1x Power Cord; 1x Standard Mounting Kit	

Optional Accessories

Type	Part No. / Spec.	Page No.
PS/2 KVM Cables	2L-5201P (1.2 m), 2L-5202P (1.8 m), 2L-5203P (3 m), 2L-5206P (6 m), 2L-5210P (10 m)	12-1
USB VGA Cables & Converters for USB Interface Support	2L-5202UP (1.8 m), 2L-5203UP (3 m), 2L-5205UP (5 m), 2L-5206UP (6 m) UC100KMA: Supports Mac Keyboards Emulation	12-1 9-3
Rack Mount Kits	Please refer to page 4-23	4-23

CL3108 / CL3116

8/16-Port PS/2-USB VGA Single Rail WideScreen LCD KVM Switch



Front



Rear

- CL3108



- CL3116



Features

- **Exclusive LED illumination light** – designed by ATEN to illuminate the keyboard and touchpad to allow visibility in low-light conditions
- Integrated KVM console with an 18.5" LED-backlit LCD monitor in a single rail housing
- Cascade up to 2 levels – controls up to 128/256 computers from a single console
- Additional hot-pluggable USB mouse port on front panel
- Supports computers with PS/2 or USB keyboards and mice
- Two level access security – administrator, user
- Auto Scan mode – enables continuous monitoring of user-selected computers
- Broadcast mode – operations simultaneously performed on all selected computers, such as software installation and upgrading, system-wide shutdown, etc.
- Keyboard Language support: English(US), English(UK), French, German, German(Swiss), Hungarian, Italian, Japanese, Korean, Russian, Spanish, Swedish, and Traditional Chinese

Specifications

	CL3108NX	CL3116NX
Computer Connections		
Direct	8	16
Maximum	128 (via Cascade)	256 (via Cascade)
Port Selection	OSD, Hotkey, Pushbutton	
Connectors		
KVM Ports	8 x SPHD Female (Yellow)	16 x SPHD Female (Yellow)
External Mouse Port	1 x USB Type A Female (Front)	
Firmware Upgrade	1 x 3.5mm Audio Jack Female (Black)	
Power	1 x IEC 60320/C14	
LEDs		
Online	8 (Orange)	16 (Orange)
Selected	8 (Green)	16 (Green)
Power	1 x KVM Console (Dark Green) 1 x LCD (Orange)	
Lock	1 x Num Lock (Green) 1 x Caps Lock (Green) 1 x Scroll Lock (Green)	
LCD Module	18.5" (1366 x 768 @ 60 Hz)	
Emulation		
Keyboard / Mouse	PS/2, USB	
Maximum Input Power Rating	100-240V AC, 50-60Hz, 1A	
Power Consumption	AC110V: 14.1W AC220V: 14.9W	
Environmental		
Operating Temperature	0 – 40°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal + Plastic	
Weight	10.50 kg (23.13 lb)	10.60 kg (23.35 lb)
Dimensions (L x W x H)	48.06 x 63.17 x 4.28 cm (18.92 x 24.87 x 1.69 in.)	
Body Dimensions (L x W x H)	44.92 x 58.4 x 4.28 cm (17.69 x 22.99 x 1.69 in.)	
Carton lot	1 pc	
Included Accessories	2x USB KVM Cables; 1x Firmware Upgrade Cable; 1x Power Cord; 1x Standard Mounting Kit	

Note: Body Dimensions exclude I/O ports, handles, and mounting brackets.

Optional Accessories

Type	Part No. / Spec.	Page No.
USB VGA KVM Cables	2L-5201U (1.2 m), 2L-5202U (1.8 m), 2L-5203U (3 m), 2L-5205U (5 m)	12-2
PS/2 VGA KVM Cables	2L-5201P (1.2 m), 2L-5202P (1.8 m), 2L-5203P (3 m), 2L-5206P (6 m), 2L-5210P (10 m)	12-1
Rack Mount Kits	Please refer to page 4-23	4-23

CL1308 / CL1316

8/16-Port PS/2-USB VGA Single Rail LCD KVM Switch



Front



Rear

- CL1308



- CL1316



Features

- **Exclusive LED illumination light** – designed by ATEN to illuminate the keyboard and touchpad to allow visibility in low-light conditions
- The most cost effective ATEN 19" LED-backlit LCD KVM Switch
- Provides ease and flexibility for expanding server installation
- Supports USB keyboards for Windows, Linux, Mac and Sun
- Two level access security – administrator, user
- Auto Scan – monitoring user-selected computers
- Broadcast mode – operations simultaneously performed on all selected computers, such as software installation and upgrading, system-wide shutdown, etc.
- Keyboard Language support: English(US), English(UK), French, German, German(Swiss), Greek, Hungarian, Italian, Japanese, Korean, Russian, Spanish, Swedish, and Traditional Chinese

Specifications

	CL1308N	CL1316N
Computer Connections		
Direct	8	16
Maximum	128 (via Cascade)	256 (via Cascade)
Port Selection	OSD, Hotkey, Pushbutton	
Connectors		
KVM Ports	8 x SPHD Female (Yellow)	16 x SPHD Female (Yellow)
Firmware Upgrade	1 x RJ-11 Female	
Power	1 x IEC 60320/C14	
LEDs		
Online	8 (Orange)	16 (Orange)
Selected	8 (Green)	16 (Green)
Power	1 (Dark Green), 1 (Orange)	
Lock	1 x Num Lock (Green) 1 x Caps Lock (Green) 1 x Scroll Lock (Green)	
LCD Module	19" (1280 x 1024 @ 75Hz)	
Emulation		
Keyboard / Mouse	PS/2, USB	
Maximum Input Power Rating	100-240V AC, 50/60Hz, 1A	
Power Consumption	AC110V: 24.4W; AC220V: 24.7W	AC110V: 25.9W; AC220V: 26.1W
Environmental		
Operating Temperature	0 – 50°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal + Plastic	
Weight	12.59 kg (27.73 lb)	12.77 kg (28.13 lb)
Dimensions (L x W x H)	48.30 x 68.92 x 4.40 cm (19.02 x 27.13 x 1.73 in.)	
Carton Lot	1 pc	
Included Accessories	2x USB KVM Cables; 1x Firmware Upgrade Cable; 1x Power Cord; 1x Standard Mounting Kit	

Optional Accessories


Type	Part No. / Spec.	Page No.
USB VGA KVM Cables	2L-5201U (1.2 m), 2L-5202U (1.8 m), 2L-5203U (3 m), 2L-5205U (5 m)	12-2
PS/2 VGA KVM Cables	2L-5201P (1.2 m), 2L-5202P (1.8 m), 2L-5203P (3 m), 2L-5206P (6 m), 2L-5210P (10 m)	12-1
Rack Mount Kits	Please refer to page 4-23	4-23

CL6708

8-Port USB DVI Single Rail WideScreen LCD KVM Switch



Front



Rear



Features

- **Exclusive LED illumination light** – designed by ATEN to illuminate the keyboard and touchpad to allow visibility in low-light conditions
- Integrated KVM console with a 17.3" LED-backlit LCD monitor in a single rail housing
- **Cascadable up to one level – controls up to 64 computers**
- Supports USB external console
- Additional hot-pluggable USB mouse port on front panel (also functions as a USB peripheral port)
- Superior video quality – up to 1920 x 1080 @ 60Hz
- Two level access security – administrator, user
- Broadcast mode – operations simultaneously performed on all selected computers, such as software installation and upgrading, system-wide shutdown, etc.
- Standard 105-key keyboard
- Keyboard Language support: English(US), English(UK), French, German, German(Swiss), Greek, Hungarian, Italian, Japanese, Korean, Russian, Spanish, Swedish, and Traditional Chinese

Specifications

CL6708MW	
Computer Connections	
Direct	8
Maximum	64 (via Cascade)
Port Selection	OSD, Hotkey, Pushbutton
Connectors	
KVM Ports	8 x DVI-I Female (White), 8 x USB Type B Female, 8 x 3.5mm Audio Jack Female (Green)
External Mouse / USB Port	1 x USB Type A Female (Front)
Firmware Upgrade	1 x RJ-11 Female
Power	1 x IEC 60320/C14
External Console Ports	1 x DVI-I Female (White), 2 x USB Type A Female, 1 x 3.5mm Audio Jack Female (Green)
LEDs	
Online	8 (Orange)
Selected	8 (Green)
Power	1 x KVM Power (Dark Green), 1 x LCD Power (Orange)
Lock	1 x Num Lock (Green) 1 x Caps Lock (Green) 1 x Scroll Lock (Green)
LCD Module	17.3" (1920 x 1080 @ 60Hz)
Emulation	
Keyboard / Mouse	USB
Maximum Input Power Rating	100–240V AC, 50–60Hz, 1A
Power Consumption	AC110V: 29.4W; AC220V: 28.7W
Environmental	
Operating Temperature	0 – 40°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Metal + Plastic
Weight	12.70 kg (27.97 lb)
Dimensions (L x W x H)	48.00 x 68.92 x 4.40 cm (18.9 x 27.13 x 1.73 in.)
Carton Lot	1 pc
Included Accessories	2x USB DVI-D Single Link KVM Cables; 1x Firmware Upgrade Cable; 1x Power Cord; 1x Standard Mounting Kit

Optional Accessories

Type	Part No. / Spec.	Page No.
USB DVI-D Single Link KVM Cables	2L-7D02U (1.8m), 2L-7D03U (3m), 2L-7D05U (5m)	12-3
USB DVI-I Single Link KVM Cables	2L-7D02UI (1.8m), 2L-7D03UI (3m)	12-3
USB HDMI to DVI-D KVM Cable	2L-7D02DH (1.8 m)	12-3
USB VGA to DVI-I KVM Cables	2L-7DX2U (1.8 m) 2L-7DX3U (3 m)	12-3
Rack Mount Kits	Please refer to page 4-23	4-23

CL5708 / CL5716

8/16-Port PS/2-USB VGA Single Rail LCD KVM Switch



Front



Rear

• CL5708



• CL5716



Features

- **Exclusive LED illumination light** – designed by ATEN to illuminate the keyboard and touchpad to allow visibility in low-light conditions
- Daisy-chain up to 31 additional units – controls up to 256 / 512 computers from a single console
- Integrated KVM console with a 17" / 19" LED-backlit LCD monitor in a single rail housing
- Optional Fingerprint Identification Reader for 17" version*
- Supports a PS/2 or USB external console
- Front panel USB port allows each computer to access USB peripherals
- Dual Interface – supports computers with PS/2 or USB keyboards and mice
- Multiplatform support – Windows, Linux, Mac and Sun
- Superior video quality – up to 1280 x 1024 @ 75Hz; DDC2B
- Two level access security – administrator, user
- Broadcast mode – operations simultaneously performed on all selected computers, such as software installation and upgrading, system-wide shutdown, etc.
- Standard 105-key keyboard
- Keyboard Language support: English(US), English(UK), French, German, German(Swiss), Greek, Hungarian, Italian, Japanese, Korean, Russian, Spanish, Swedish, and Traditional Chinese

Note: * Part No. for fingerprint identification reader version: CL5708FM, CL5716FM.

Specifications

	CL5708M / CL5708N	CL5716M / CL5716N
Computer Connections		
Direct	8	16
Maximum	256 (via Daisy-chain)	512 (via Daisy-chain)
Port Selection	OSD, Hotkey, Pushbutton	
Connectors		
KVM Ports	8 x SPHD Female (Yellow)	16 x SPHD Female (Yellow)
External Mouse Port	1 x USB Type A Female (Front)	
USB Port	1 x USB Type A Female	
Daisy Chain Ports	1 x DB-25 Male	
Firmware Upgrade	1 x RJ-11 Female	
Power	1 x IEC 60320/C 14	
External Console Ports	1 x SPHD Male (Yellow)	
LEDs		
Port ID	2 x 7-segment LED Display (Orange)	
Station ID	2 x 7-segment LED Display (Orange)	
Online	8 (Orange)	16 (Orange)
Power	1 (Dark Green)	
Lock	1 x Num Lock (Green) 1 x Caps Lock (Green) 1 x Scroll Lock (Green)	
LCD Module	CL5708M: 17" / CL5708N: 19" (1280 x 1024 @ 75Hz)	CL5716M: 17" / CL5716N: 19" (1280 x 1024 @ 75Hz)
Emulation		
Keyboard / Mouse	PS/2, USB	
Maximum Input Power Rating	100-240V AC, 50/60Hz, 1A	
Power Consumption	CL5708M: AC110V: 23.9W; AC220V: 25.1W CL5708N: AC110V: 26.1W; AC220V: 27.2W	CL5716M: AC110V: 24.7W; AC220V: 25.8W CL5716N: AC110V: 26.9W; AC220V: 27.9W
Environmental		
Operating Temperature	CL5708M / CL5716M: 0 – 40°C CL5708N / CL5716N: 0 – 50°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 85% RH, Non-condensing	
Physical Properties		
Housing	Metal + Plastic	
Weight	CL5708M: 13.47 kg (29.67 lb) CL5708N: 13.39 kg (29.49 lb)	CL5716M: 13.59 kg (29.93 lb) CL5716N: 13.65 kg (30.07 lb)
Dimensions (L x W x H)	CL5708M: 48.00 x 64.27 x 4.40 cm (18.9 x 25.3 x 1.73 in.) CL5708N: 48.00 x 68.92 x 4.40 cm (18.9 x 27.13 x 1.73 in.)	CL5716M: 48.00 x 64.27 x 4.40 cm (18.9 x 25.3 x 1.73 in.) CL5716N: 48.00 x 68.92 x 4.40 cm (18.9 x 27.13 x 1.73 in.)
Carton Lot	1 pc	
Included Accessories	2x USB KVM Cables; 1x Custom Console Cable; 1x Firmware Upgrade Cable; 1x Power Cord; 1x Standard Mounting Kit	

Optional Accessories

Type	Part No. / Spec.	Page No.
USB VGA KVM Cables	2L-5201U (1.2 m), 2L-5202U (1.8 m), 2L-5203U (3 m), 2L-5205U (5 m)	12-2
PS/2 VGA KVM Cables	2L-5201P (1.2 m), 2L-5202P (1.8 m), 2L-5203P (3 m), 2L-5206P (6 m), 2L-5210P (10 m)	12-1
Daisy-chain Cables	2L-1700 (0.6 m), 2L-1701 (1.8 m), 2L-1703 (3 m), 2L-1705 (5 m), 2L-1715 (15 m)	12-3
Rack Mount Kits	Please refer to page 4-23	4-23

CL5808 / CL5816

8/16-Port PS/2-USB VGA Dual Rail LCD KVM Switch




Front



Rear

• CL5808



• CL5816



Features

- **Exclusive LED illumination light** – designed by ATEN to illuminate the keyboard and touchpad to allow visibility in low-light conditions
- **Dual rail design** allows LED-backlit LCD monitor and keyboard / touchpad modules to operate independently
- Daisy-chain up to 31 additional units – controls up to 256 / 512 computers from a single console
- Integrated KVM console with a 19" LED-backlit LCD monitor in a dual rail housing
- Front panel USB port allows each computer to access USB peripherals
- Supports computers with PS/2 or USB keyboards / mice
- Two level access security – administrator, user
- Broadcast mode – operations simultaneously performed on all selected computers, such as software installation and upgrading, system-wide shutdown, etc.
- Keyboard Language support: English(US), English(UK), French, German, German(Swiss), Greek, Hungarian, Italian, Japanese, Korean, Russian, Spanish, Swedish, and Traditional Chinese; standard 105-key keyboard

Specifications

	CL5808N	CL5816N
Computer Connections		
Direct	8	16
Maximum	256 (via Daisy-chain)	512 (via Daisy-chain)
Port Selection	OSD, Hotkey, Pushbutton	
Connectors		
KVM Ports	8 x SPHD Female (Yellow)	16 x SPHD Female (Yellow)
External Mouse Port	1 x USB Type A Female (Front)	
USB Port	1 x USB Type A Female (Front)	
Daisy Chain Ports	1 x DB-25 Male	
Firmware Upgrade	1 x RJ-11 Female	
Power	1 x IEC 60320/C14	
External Console Ports	1 x SPHD Male (Yellow)	
LEDs		
Online	8 (Orange)	16 (Orange)
Selected	8 (Green)	16 (Green)
Station ID	2 x 7-segment LED Display (Orange)	
Power	1 (Dark Green)	
Lock	1 x Num Lock (Green) 1 x Caps Lock (Green) 1 x Scroll Lock (Green)	
LCD Module	19" (1280 x 1024 @ 75Hz)	
Emulation		
Keyboard / Mouse	PS/2, USB	
Maximum Input Power Rating	100–240V AC, 50/60Hz, 1A	
Power Consumption	AC110V: 25.2W; AC220V: 27.2W	AC110V: 26.2W; AC220V: 27.6W
Environmental		
Operating Temperature	0 – 50°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal + Plastic	
Weight	14.48 kg (31.89 lb)	14.76 kg (32.54 lb)
Dimensions (L x W x H)	48.00 x 68.04 x 4.40 cm (18.9 x 26.79 x 1.73 in.)	
Carton Lot	1 pc	
Included Accessories	2x PS/2-USB KVM Cables; 1x Custom Console Cable; 1x Firmware Upgrade Cable; 1x Power Cord; 2x L Brackets; 1x Standard Mounting Kit	

Optional Accessories

Type	Part No. / Spec.	Page No.
USB VGA KVM Cables	2L-5201U (1.2 m), 2L-5202U (1.8 m), 2L-5203U (3 m), 2L-5205U (5 m)	12-2
PS/2-USB VGA KVM Cables	2L-5301UP (1.2 m), 2L-5302UP (1.8 m), 2L-5303UP (3 m)	12-2
PS/2 VGA KVM Cables	2L-5201P (1.2 m), 2L-5202P (1.8 m), 2L-5203P (3 m), 2L-5206P (6 m), 2L-5210P (10 m)	12-1
Daisy-chain Cables	2L-1700 (0.6 m), 2L-1701 (1.8 m), 2L-1703 (3 m), 2L-1705 (5 m), 2L-1715 (15 m)	12-3
Rack Mount Kits	Please refer to page 4-23	4-23

CL1008 / CL1016

8/16-Port PS/2-USB VGA Single Rail LCD KVM Switch




Front



Rear

- CL1008



- CL1016



Features

- **Exclusive LED illumination light** – designed by ATEN to illuminate the keyboard and touchpad to allow visibility in low-light conditions
- Daisy-chain up to 15 additional units – controls up to 128 / 256 computers from a single console
- Integrated KVM console with a 17" LED-backlit LCD monitor in a single rail housing
- Auto Scan feature for monitoring user-selected computers
- Broadcast mode – operations simultaneously performed on all selected computers, such as software installation and upgrading, system-wide shutdown, etc.
- Two level access security – administrator, user
- Standard 105-key keyboard
- Keyboard Language support: English(US), English(UK), French, German, German(Swiss), Hungarian, Italian, Japanese, Korean, Russian, Spanish, Swedish, and Traditional Chinese

Specifications

	CL1008M	CL1016M
Computer Connections		
Direct	8	16
Maximum	128 (via Daisy-chain)	256 (via Daisy-chain)
Port Selection	OSD, Hotkey, Pushbutton	
Connectors		
KVM Ports	8 x SPHD Female (Yellow)	16 x SPHD Female (Yellow)
Daisy Chain Ports	1 x DB-25 Male	
Firmware Upgrade	1 x RJ-11 Female	
Power	1 x IEC 60320/C 14	
LEDs		
Online	8 (Orange)	16 (Orange)
Selected	8 (Green)	16 (Green)
Power	1 (Dark Green)	
Lock	1 x Num Lock (Green) 1 x Caps Lock (Green) 1 x Scroll Lock (Green)	
LCD Module	17" (1280 x 1024 @ 75Hz)	
Emulation		
Keyboard / Mouse	PS/2, USB (via 2L-520xUP cables)	
Maximum Input Power Rating	100-240V AC, 50/60Hz, 1A	
Power Consumption	AC110V: 21.3W; AC220V: 23.6W	AC110V: 22.3W; AC220V: 24.5W
Environmental		
Operating Temperature	0 – 40°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal + Plastic	
Weight	13.34 kg (29.38 lb)	13.55 kg (29.85 lb)
Dimensions (L x W x H)	48.00 x 64.02 x 4.40 cm (18.9 x 25.2 x 1.73 in.)	
Carton Lot	1 pc	
Included Accessories	2x PS/2 KVM Cables; 1x Firmware Upgrade Cable; 1x Power Cord; 1x Standard Mounting Kit	

Optional Accessories

Type	Part No. / Spec.	Page No.
PS/2 VGA KVM Cables	2L-5201P (1.2 m), 2L-5202P (1.8 m), 2L-5203P (3 m), 2L-5206P (6 m), 2L-5210P (10 m)	12-1
USB VGA Cables & Converters for USB Interface Support	2L-5202UP (1.8 m), 2L-5203UP (3 m), 2L-5205UP (5 m), 2L-5206UP (6 m) UC100KMA: Supports Mac Keyboards Emulation	12-1 9-3
Daisy-chain Cables	2L-1700 (0.6 m), 2L-1701 (1.8 m), 2L-1703 (3 m), 2L-1705 (5 m), 2L-1715 (15 m)	12-3
Rack Mount Kits	Please refer to page 4-23	4-23

Optional Rack Mount Kits

- Standard Short – package included



- Standard Long



2X-010G



2X-023G



2X-040G

- Easy Installation Short



2K-0003



2K-0005

- Easy Installation Long




2K-0004



2K-0006


The following illustrations demonstrate just how easy it is to install your new LCD KVM Switch / LCD Console with the Easy Installation Rack Mount Kit.



1. Secure the side rails to the rack.



2. Slide the LCD KVM Switch / LCD Console onto the rails and secure it to the rack.



3. Now slide it out and you are ready to work.

Model No.	Rack Mount Kit	Depth (cm)
CL1000N	Standard Installation - Short (Standard)	52 - 85
	Standard Installation - Long (2X-023G)	70 - 105
	Easy Installation - Short (2K-0003)	57 - 70
	Easy Installation - Long (2K-0004)	68 - 105
CL1308N, CL1316N	Standard Installation - Short (Standard)	52 - 85
	Standard Installation - Long (2X-023G)	70 - 105
	Easy Installation - Short (2K-0005)	57 - 70
	Easy Installation - Long (2K-0006)	68 - 105
CL3000N	Standard Installation - Short (Standard)	52 - 85
	Standard Installation - Long (2X-010G)	70 - 105
	Easy Installation - Short (2K-0003)	57 - 70
	Easy Installation - Long (2K-0004)	68 - 105
CL5800N, CL6700MW, CL6708MW, CL5708N, CL5716N, CL5808N, CL5816N, CL5708IN, CL5716IN	Standard Installation - Short (Standard)	52 - 85
	Standard Installation - Long (2X-010G)	70 - 105
	Easy Installation - Short (2K-0005)	57 - 70
	Easy Installation - Long (2K-0006)	68 - 105
CL1008M, CL1016M, CL5708M, CL5716M, CL5708IM, CL5716IM	Standard Installation - Short (Standard)	42 - 82
	Standard Installation - Long (2X-010G)	68 - 105
	Easy Installation - Short (2K-0005)	57 - 70
	Easy Installation - Long (2K-0006)	68 - 105
CL3884NW, CL3108NX, CL3116NX	Standard Installation - Short (Standard)	58 - 80
	Standard Installation - Long (2X-040G)	70 - 105
	Easy Installation - Short (2K-0005)	57 - 70
	Easy Installation - Long (2K-0006)	68 - 105
CL1000M	Standard Installation - Short (Standard)	42 - 72
	Standard Installation - Long (2X-010G)	68 - 100
	Easy Installation - Short (2K-0003)	57 - 70
	Easy Installation - Long (2K-0004)	68 - 105
CL3800	Standard Installation - Short (Standard)	47 - 75
	Standard Installation - Long (2X-040G)	70 - 100
	Easy Installation - Short (2K-0003)	46.5 - 70
	Easy Installation - Long (2K-0004)	68 - 105
CL3100, CL3700	Standard Installation - Short (Standard)	42 - 72
	Standard Installation - Long (2X-040G)	70 - 100
	Easy Installation - Short (2K-0003)	42.5 - 70
	Easy Installation - Long (2K-0004)	68 - 105

Optional Rack Mount Kits

2-in-1U Mounting Kit

The ATEN 2-in-1U Mounting Kit allows you to combine the CL3800/CL3700/CL3100 LCD KVM Console with a rack KVM switch in 1U of space, which helps users save space for a more convenient and flexible working environment.

• Standard Installation



2K-0001



2K-0007

• Easy Installation




2K-0002

Table of compatibility between the LCD KVM consoles and the KVM switches

Mounting Kit	LCD KVM Console		CL3800	CL3700	CL3100	Depth of KVM Switch (cm)	Applicable Rack Depth (cm)
	Compatible KVM Model						
2K-0001 / 2K-0002	CS1768		●	N/A	N/A	15.5	78.0-105.0
	CS1754 / CS1758, CS1308 / CS1316, CS1708A / CS1716A, KH1508A / KH1516A / KH1532A, KH1508Ai / KH1516Ai		●	N/A	●		
	CS19208 / CS19216, CS18208 / CS18216		●	●	N/A	21.0	83.5-105.0
	CS1798 / CS17916		●	●	N/A	25.4	87.9-105.0
2K-0007	KN1108VA / KN1116VA		●	●	●	28.0	88.5-105.0
	KN4116VA / KN4132VA, KN2116VA / KN2132VA, KN1132V, KN4140VA / KN4124VA, KN2140VA / KN2124VA		●	●	●	40.7	101.2-105.0

Note: For more information about the KN and KH products, please refer to Altusen product catalog.

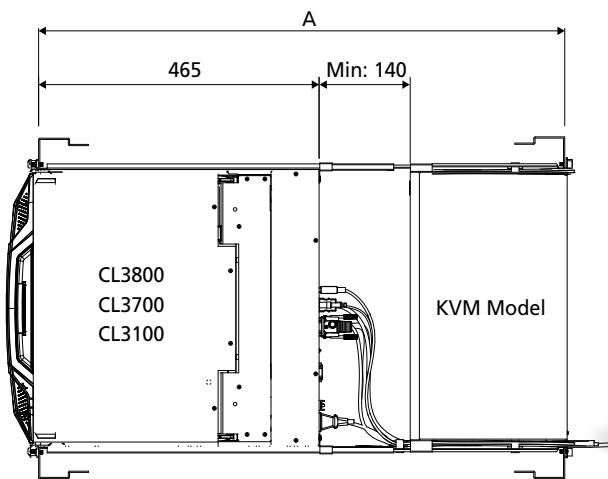

Note: A stands for Applicable Rack Depth.



KVM Extenders

ATEN KVM Extenders offer a full range of options that allow you to extend the distance between your console and the computers in your installation by up to 20km. They are ideal for all applications that require access to computers in remote and secure locations.



- **HDBaseT™**


ATEN HDBaseT™ KVM extenders provide a simple and efficient solution for transmitting Ultra HD signals, audio, 100Mb Ethernet, power, and control signals over a single cable up to 150m. A wide range of models are available, with video interface support for DisplayPort, HDMI, and DVI.

- **Fiber Optic**

ATEN Fiber Optic KVM Extenders utilize single-mode or multi-mode optical fiber cables to extend AV, RS-232, or USB signals at extremely long distances up to 20km with zero latency as well as resistance to environmental interference.

- **Cat5 / Cat6**

ATEN provides a wide range of long-distance KVM extension solutions that connect via standard Cat5e/6/6a cables, including DVI and VGA models.

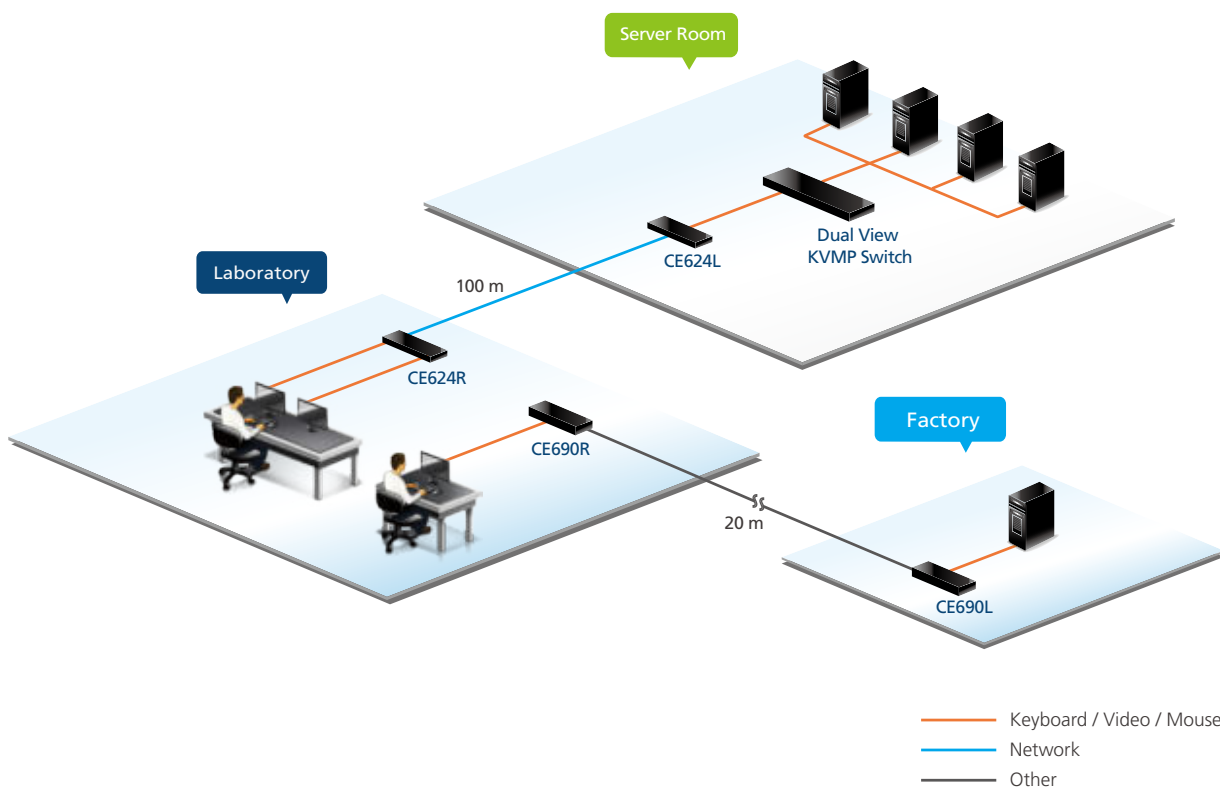

Feature Comparison

HDBaseT™

Model No.		CE924	CE920	CE820
Distance		Standard: 100 m Long Reach Mode: 150 m		
HDBaseT		HDBaseT 2.0	HDBaseT 2.0	HDBaseT 2.0
Interface	Unit to Unit	Cat 6 / 6a / 2L-2910 x 1		
	Keyboard, Mouse	USB	USB	USB
	Video	DisplayPort	DisplayPort	HDMI
Dual View		•	N/A	N/A
Audio		• (DisplayPort / Stereo)	• (DisplayPort / Stereo)	• (HDMI / Stereo)
USB Channel		•	•	•
Ethernet Channel		•	•	•
RS-232 Channel		•	•	•
Local Console		N/A	N/A	N/A

Model No.		CE624	CE620	CE611	CE610A
Distance		Standard: 100 m Long Reach Mode: 150 m		100 m	100 m
HDBaseT		HDBaseT 2.0	HDBaseT 2.0	HDBaseT	HDBaseT
Interface	Unit to Unit	Cat 6 / 6a / 2L-2910 x 1		Cat 6 / 6a / 2L-2910 x 1	Cat 6 / 6a / 2L-2910 x 1
	Keyboard, Mouse	USB	USB	USB	USB
	Video	DVI-D (Single Link)	DVI-D (Single Link)	DVI-D (Single Link)	DVI-D (Single Link)
Dual View		•	N/A	N/A	N/A
Audio		• (Stereo)	• (Stereo)	• (Stereo)	N/A
USB Channel		•	•	•	•
Ethernet Channel		N/A	N/A	N/A	N/A
RS-232 Channel		•	•	•	N/A
Local Console		N/A	N/A	N/A	N/A

Fiber Optic

Model No.		CE680	CE690
Distance		600 m	20 km
Interface	Unit to Unit	Fiber optic x 1	Fiber optic x 1
	Keyboard, Mouse	USB	USB
	Video	DVI-D (Single Link)	DVI-D (Single Link)
Dual View		N/A	N/A
Audio		• (Stereo)	• (Stereo)
Automatic Gain Control		N/A	N/A
Manual Gain Control		N/A	N/A
USB 2.0 Peripheral		N/A	N/A
USB Touch Panel		•	•
RS-232 Channel		•	•
Local Console		•	•

Cat5 / Cat6 – DVI

Model No.		CE604	CE600	CE602
Distance		60 m	60 m	60 m
Interface	Unit to Unit	Cat 5e x 1 (or 2)	Cat 5e x 1 (or 2)	Cat 5e x 1 (or 2)
	Keyboard, Mouse	USB	USB	USB
	Video	DVI-D (Single Link)	DVI-D (Single Link)	DVI-D (Dual Link)
Dual View		•	N/A	N/A
Audio		• (Stereo)	• (Stereo)	• (Stereo)
Automatic Gain Control		N/A	N/A	N/A
Manual Gain Control		•	•	•
USB 2.0 Peripheral		N/A	N/A	N/A
USB Touch Panel		N/A	N/A	N/A
RS-232 Channel		•	•	•
Local Console		N/A	N/A	N/A

Cat5 / Cat6 – VGA

Model No.		CE800B	CE774	CE775	CE770	CE750A
Distance		250 m	150 m	300 m	300 m	200 m
Interface	Unit to Unit	Cat 5e x 1	Cat 5e x 2	Cat 5e x 2	Cat 5e x 1	Cat 5e x 1
	Keyboard, Mouse	USB	USB	USB	USB	USB
	Video	VGA	VGA	VGA	VGA	VGA
Dual View		N/A	•	•	N/A	N/A
Audio		• (Stereo)	• (Stereo)	• (Stereo)	• (Stereo)	• (Stereo)
Automatic Gain Control		•	•	•	•	•
Manual Gain Control		•	•	•	•	•
USB 2.0 Peripheral		•	N/A	N/A	N/A	N/A
USB Touch Panel		N/A	N/A	N/A	N/A	N/A
RS-232 Channel		N/A	•	•	•	•
Patented Deskew		N/A	N/A	•	•	N/A
Local Console		•	•	•	•	•

Model No.		CE700A	CE100	CE350	CE370	CE250A
Distance		150 m	100 m	150 m	300 m	150 m
Interface	Unit to Unit	Cat 5e x 1	Cat 5e x 1	Cat 5e x 1	Cat 5e x 1	Cat 5e x 1
	Keyboard, Mouse	USB	USB	PS/2	PS/2	PS/2
	Video	VGA	VGA	VGA	VGA	VGA
Dual View		N/A	N/A	N/A	N/A	N/A
Audio		N/A	N/A	• (Stereo)	• (Stereo)	N/A
Automatic Gain Control		•	N/A	•	•	•
Manual Gain Control		N/A	•	•	•	N/A
USB 2.0 Peripheral		N/A	N/A	N/A	N/A	N/A
USB Touch Panel		N/A	N/A	N/A	N/A	N/A
RS-232 Channel		N/A	N/A	•	•	N/A
Patented Deskew		N/A	N/A	N/A	•	N/A
Local Console		•	N/A	•	•	•



Benefits of ATEN HDBaseT KVM Extenders

ATEN HDBaseT™ KVM extenders provide a simple and efficient solution for transmitting Ultra HD signals, audio, 100Mb Ethernet, power, and control signals over a single cable up to 150m. A wide range of models are available, with video interface support for DisplayPort, HDMI, and DVI.



Simplified Cabling

Implements HDBaseT extension technology to connect transmitter and receiver units over one single Cat 6 / 6a cable.



Anti-jamming Design

HDBaseT anti-jamming technology resists signal interference during high-quality video transmissions.



Uncompressed Video Transmission

Delivers up to 4K video quality with uncompressed, pixel-to-pixel accuracy.



Remote Wake-up PC Function

Allows user to simply push a button to remote wake up the PC from Standby Mode.



Outstanding USB Compatibility

Tested compatible with a multitude of USB peripheral devices.



Flexible Control

Provides multiple control channels including RS-232, Ethernet, and USB.

CE924

USB DisplayPort Dual View HDBaseT 2.0 KVM Extender



Front

- CE924L



- CE924R



Rear

- CE924L



- CE924R



Features

- Allows DisplayPort Dual View access to a computer and KVM control from a remote console
- Supports HDBaseT 2.0 technology - Extends video, audio, USB, RS-232, and Ethernet signals via a single Cat6 / 6a / 2L-2910 Cat 6 cable - Enhanced bit error detection and correction to resist signal interference during high-quality video transmissions - Status detection and LED indication for HDBaseT™ signal transmission on remote unit
- EDID Buffer for smooth power-up and the highest quality display
- Single category cable to transmit AV and control signal
 - HDBaseT Standard mode up to 4K @ 100 m (Cat 6 / 6a / 2L-2910); (for single view only; dual-view resolution up to 1080p)
 - HDBaseT Long-Reach mode up to 1080P @ 150 m; (for single view only; dual-view resolution up to 720p)
- Long Reach mode switch – switches between HDBaseT™ Standard and Long Reach modes in a snap
- USB 2.0 full speed ports – ensures fast transmission speeds for peripherals; 4 ports USB hub on receiver
- HDCP Compatible
- Supports individual 2-channel stereo audio for high-quality audio applications
- Supports PC wakeup function via single pushbutton through RS-232 channel*
- Built-in 8KV / 15KV ESD protection (Contact voltage 8KV; Air voltage 15KV)

Specifications


	CE924L	CE924R
Connectors		
KVM Ports	2 xDisplayPort Female (Black) 1 x USB Type B Female (White) 1 x Mini Stereo Jack Female (Green) 1 x Mini Stereo Jack Female (Pink)	N/A
Console Ports	N/A	2 x DisplayPort Female (Black) 4 x USB Type A Female (White) 1 x Mini Stereo Jack Female (Green) 1 x Mini Stereo Jack Female (Pink)
RS-232	1 x DB-9 Female (Black)	1 x DB-9 Male (Black)
Power	1 x DC Jack with locking	
Unit To Unit	1 x RJ-45 Female (Black)	
LEDs		
Power	1 (Green)	
Link	1 (Orange)	
Video Output	N/A	2 (Orange)
Video	Single view: Up to 4K @ 90 m (Cat 5e) / 100m (Cat 6 / 6a / ATEN 2L-2910 Cat 6) 1080P @ 100 m (Cat 5e / 6/ 6a) Dual-view: Up to 1080p @ 100 m *4K supported: 4096 x 2160 / 3840 x 2160 @ 30Hz (4:4:4)	
Power Consumption	DC 12V:7.03W	DC 12V:9.92W
Environmental		
Operating Temperature	0 – 40°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal	
Weight	0.80 kg (1.76 lb)	0.81 kg (1.78 lb)
Dimensions (L x W x H)	17.42 x 15.94 x 2.88 cm (6.86 x 6.28 x 1.13 in.)	
Carton Lot	1 set	
Included Accessories	2x DisplayPort Cables (1.8 m); 1x Pink Audio Jack Cable Sets (1.8 m); 1x Green Audio Jack Cable Sets (1.8 m); 1x USB Type-A to Type-B Cable (1.8 m); 2x Power Adapters; 8x Foot Pads; 2x Mounting Kits	

Optional Accessories

Type	Part No. / Spec.	Page No.
DisplayPort Cables	2L-7D02DP (2 m), 2L-7D03DP (3 m)	12-3
HDBaseT Cat 6 Cable	2L-2910	5-25

CE920

USB DisplayPort HDBaseT 2.0 KVM Extender



(CE920R)

Front

- CE920L



- CE920R



Rear

- CE920L



- CE920R



Features

- **Supports HDBaseT 2.0 technology**
 - Extends video, audio, USB, RS-232, and Ethernet signals via a single Cat6 / 6a / ATEN 2L-2910 Cat 6 cable
 - Enhanced bit error detection and correction to resist signal interference during high-quality video transmissions
 - Status detection and LED indication for HDBaseT signal transmission on remote unit
- EDID Buffer for smooth power-up and the highest quality display
- DisplayPort 1.1 (1080P, 4K); HDCP compatible
- **Long distance with superior video quality**
 - HDBaseT Standard mode up to 4K @ 100 m (Cat 6 / 6a / 2L-2910)
 - HDBaseT Long-Reach mode up to 1080P @ 150 m
- Long Reach mode switch – switches between HDBaseT Standard and Long Reach modes in a snap
- USB 2.0 full speed ports – ensure fast transmission speeds for peripherals
- Supports individual 2-channel stereo audio for high-quality audio applications
- Supports PC wakeup function via single pushbutton through RS-232 channel*
- Built-in 8KV / 15KV ESD protection (Contact voltage 8KV; Air voltage 15KV)

* The computer has to support Wake Up Ring for this function to work.

Specifications

	CE920L	CE920R
Connectors		
Console Ports	N/A	1 x DisplayPort Female (Black) 3 x USB Type A Female 1 x Mini Stereo Jack Female (Green) 1 x Mini Stereo Jack Female (Pink) 1 x RJ-45 Female (Black)
KVM Ports	1 x DisplayPort Female (Black) 1 x USB Type B Female (White) 1 x Mini Stereo Jack Female (Green) 1 x Mini Stereo Jack Female (Pink) 1 x RJ-45 Female (Black)	N/A
RS-232	1 x DB-9 Female (Black)	1 x DB-9 Male (Black)
Power	1 x DC Jack with locking	
Unit To Unit	1 x RJ-45 Female (Black)	
LEDs		
Power	1 (Green)	
Link	1 (Orange)	
Video Output	N/A	1 (Orange)
Video	Up to 4K @ 90 m (Cat 5e) / 100 m (Cat 6 / 6a / ATEN 2L-2910 Cat 6), 1080P @ 100 m (Cat 5e / 6 / 6a) *4K supported: 4096 x 2160 / 3840 x 2160 @ 60Hz (4:2:0); 4096 x 2160 / 3840 x 2160 @ 30Hz (4:4:4)	
Power Consumption	DC5V: 3.99W	DC5V: 6.74W
Environmental		
Operating Temperature	0 – 40°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal	
Weight	0.63 kg (1.39 lb)	0.64 kg (1.41 lb)
Dimensions (L x W x H)	18.20 x 12.19 x 2.87 cm (7.17 x 4.80 x 1.13 in.)	
Carton Lot	5 sets	
Included Accessories	1x DisplayPort Cable; 1x Microphone Cable; 1x Speaker Cable; 1x USB Type-A to Type-B Cable; 2x Mounting Kits; 2x Power Adapters; 8x Foot Pads	

Note: DisplayPort v1.1 supports up to 4Kx2K @ 30Hz.

Optional Accessories

Type	Part No. / Spec.	Page No.
DisplayPort Cables	2L-7D02DP (2 m), 2L-7D03DP (3 m)	12-3
HDBaseT Cat 6 Cable	2L-2910	5-25

CE820

USB HDMI HDBaseT 2.0 KVM Extender



(CE820R)

Front

- CE820L



- CE820R



Rear

- CE820L



- CE820R



Features

- **Supports HDBaseT 2.0 technology**
 - Extends video, audio, USB, RS-232, and Ethernet signals via a single Cat6 / 6a / ATEN 2L-2910 Cat 6 cable
 - Enhanced bit error detection and correction to resist signal interference during high-quality video transmissions
 - Status detection and LED indication for HDBaseT signal transmission on remote unit
- EDID Buffer for smooth power-up and the highest quality display
- HDMI (3D, Deep Color, 1080P, 4K); HDCP 2.2 Compatible
- **Long distance with superior video quality**
 - HDBaseT Standard mode up to 4K @ 100 m (Cat 6 / 6a / 2L-2910)
 - HDBaseT Long-Reach mode up to 1080P @ 150 m
- Long Reach mode switch – switches between HDBaseT Standard and Long Reach modes in a snap
- USB 2.0 full speed ports – ensure fast transmission speeds for peripherals
- Supports individual 2-channel stereo audio for high-quality audio applications
- Supports PC wakeup function via single pushbutton through RS-232 channel*
- Built-in 8KV / 15KV ESD protection (Contact voltage 8KV; Air voltage 15KV)

* The computer has to support Wake Up Ring for this function to work.

Specifications

	CE820L	CE820R
Connectors		
Console Ports	N/A	1 x HDMI Female (Black) 3 x USB Type A Female 1 x Mini Stereo Jack Female (Green) 1 x Mini Stereo Jack Female (Pink) 1 x RJ-45 Female (Black)
KVM Ports	1 x HDMI Female (Black) 1 x USB Type B Female (White) 1 x Mini Stereo Jack Female (Green) 1 x Mini Stereo Jack Female (Pink) 1 x RJ-45 Female (Black)	N/A
RS-232	1 x DB-9 Female (Black)	1 x DB-9 Male (Black)
Power	1 x DC Jack with locking	
Unit To Unit	1 x RJ-45 Female (Black)	
LEDs		
Power	1 (Green)	
Link	1 (Orange)	
Video Output	N/A	1 (Orange)
Video	Up to 4K@ 90 m (Cat 5e) / 100 m (Cat 6 / 6a / ATEN 2L-2910 Cat 6), 1080P @ 100 m (Cat 5e / 6 / 6a) *4K supported: 4096 x 2160 / 3840 x 2160 @ 60Hz (4:2:0); 4096 x 2160 / 3840 x 2160 @ 30Hz (4:4:4)	
Power Consumption	DC5V: 2.87W	DC5V: 5.37W
Environmental		
Operating Temperature	0 – 40°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal	
Weight	0.63 kg (1.39 lb)	0.65 kg (1.43 lb)
Dimensions (L x W x H)	18.20 x 12.19 x 2.87 cm (7.17 x 4.80 x 1.13 in.)	
Carton Lot	5 sets	
Included Accessories	1x HDMI KVM Cable Set; 2x Power Adapters; 2x Mounting Kits	

Optional Accessories

Type	Part No. / Spec.	Page No.
HDMI KVM Cable	2L-7D02UH (1.8 m)	12-3
HDBaseT Cat 6 Cable	2L-2910	5-25

CE624

USB DVI Dual View HDBaseT 2.0 KVM Extender



(CE624R)

Front

- CE624L



- CE624R



Rear

- CE624L



- CE624R



Features

- Allows **DVI Dual-view** access and KVM control to a computer from a remote console
- **Supports HDBaseT 2.0 technology**
 - Extends video, audio, USB, and RS-232 signals via a single Cat6 / 6a / ATEN 2L-2910 Cat 6 cable
 - Enhanced bit error detection and correction to resist signal interference during high-quality video transmissions
 - Status detection and LED indication for HDBaseT signal transmission on remote unit
- EDID Buffer for smooth power-up and the highest quality display
- **Long distance with superior video quality**
 - HDBaseT Standard mode up to 1920 x 1200 @ 100 m using Cat 6 / 6a / 2L-2910 (for single view only; dual-view resolution up to 1080p)
 - HDBaseT Long-Reach mode up to 1080p @ 150 m (for single view only; dual-view resolution up to 720p)
- Long Reach mode switch – switches between HDBaseT Standard and Long Reach modes in a snap
- USB 2.0 full speed ports – ensure fast transmission speeds for peripherals
- Supports 2-channel PCM digital audio – ensuring high quality audio applications
- Supports PC wakeup function via pushbutton or hotkey
- Built-in 8KV / 15KV ESD protection (Contact voltage 8KV; Air voltage 15KV)
- HDCP compatible

Specifications

	CE624L	CE624R
Connectors		
Console Ports	N/A	2 x DVI-D Female (White) 3 x USB Type A Female (White) 1 x Mini Stereo Jack Female (Green) 1 x Mini Stereo Jack Female (Pink)
KVM Ports	2 x DVI-D Female (White) 1 x USB Type B Female (White) 1 x Mini Stereo Jack Female (Green) 1 x Mini Stereo Jack Female (Pink)	N/A
RS-232	1 x DB-9 Female (Black)	1 x DB-9 Male (Black)
Power	1 x DC Jack with locking	
Unit To Unit	1 x RJ-45 Female (Black)	
LEDs		
Power	1 (Green)	
Link	1 (Orange)	
Video Output	N/A	2 (Orange)
Video	Single view: Up to 1600 x 1200 & 1920 x 1200@90m (Cat 5e) / 100m (cat 6/6a); 1080P@100m Dual view: Up to 1080p@100m	
Power Consumption	DC5V: 4.93W	DC5V: 7.2W
Environmental		
Operating Temperature	0 – 40°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal	
Weight	0.80 kg (1.76 lb)	0.81 kg (1.78 lb)
Dimensions (L x W x H)	17.42 x 15.94 x 2.88 cm (6.86 x 6.28 x 1.13 in.)	
Carton Lot	1 set	
Included Accessories	2x DVI-D Cables; 2x Audio Cable Sets; 1x USB Cable; 2x Power Adapters; 8x Food Pads; 2x Mounting Kits	

Optional Accessories

Type	Part No. / Spec.	Page No.
HDBaseT Cat 6 Cable	2L-2910	5-25

CE620

USB DVI HDBaseT 2.0 KVM Extender




(CE620R)

Front

- CE620L



- CE620R



Rear

- CE620L



- CE620R



Features

- **Supports HDBaseT 2.0 technology**
 - Extends video, audio, USB, and RS-232 signals via a single Cat6 / 6a / ATEN 2L-2910 Cat 6 cable
 - Enhanced bit error detection and correction to resist signal interference during high-quality video transmissions
 - Status detection and LED indication for HDBaseT signal transmission on remote unit
- EDID Buffer for smooth power-up and the highest quality display
- **Long distance with superior video quality**
 - HDBaseT Standard mode up to 1920 x 1200 @ 100 m (Cat 6 / Cat 6a / 2L-2910)
 - HDBaseT Long-Reach mode up to 1920 x 1080 @ 150 m
- Long Reach mode switch – switches between HDBaseT Standard and Long Reach modes in a snap
- 3 USB 2.0 ports for keyboard/mouse and peripherals
- Supports 2-channel PCM digital audio – ensuring high quality audio applications
- Supports PC wakeup function via pushbutton or hotkey
- Built-in 8KV / 15KV ESD protection (Contact voltage 8KV; Air voltage 15KV)

Specifications

	CE620L	CE620R
Connectors		
Console Ports	N/A	1 x DVI-D Female (White) 3 x USB Type A Female 1 x Mini Stereo Jack Female (Green) 1 x Mini Stereo Jack Female (Pink)
KVM Ports	1 x DVI-D Female (White) 1 x USB Type B Female (White) 1 x Mini Stereo Jack Female (Green) 1 x Mini Stereo Jack Female (Pink)	N/A
RS-232	1 x DB-9 Female (Black)	1 x DB-9 Male (Black)
Power	1 x DC Jack with locking	
Unit To Unit	1 x RJ-45 Female (Black)	
LEDs		
Power	1 (Green)	
Link	1 (Orange)	
Video Output	N/A	1 (Orange)
Video	Up to 1600 x 1200 & 1920 x 1200 @ 90 m (Cat 5e) / 100 m (Cat 6/6a) 1920 x 1080 @ 150 m (Long reach mode enable)	
Power Consumption	DC5V: 2.68W	DC5V: 5.02W
Environmental		
Operating Temperature	0 – 40°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal	
Weight	0.63 kg (1.39 lb)	0.64 kg (1.41 lb)
Dimensions (L x W x H)	18.20 x 12.28 x 2.87 cm (7.17 x 4.83 x 1.13 in.)	
Carton Lot	5 sets	
Included Accessories	1x Custom KVM Cable; 2x Power Adapters; 2x Mounting Kits; 8x Foot Pads	

Optional Accessories

Type	Part No. / Spec.	Page No.
USB DVI-D Single Link KVM Cables	2L-7D02U (1.8 m), 2L-7D03U (3 m), 2L-7D05U (5 m)	12-3
HDBaseT Cat 6 Cable	2L-2910	5-25

CE611

Mini USB DVI HDBaseT KVM Extender



(CE611R)

Front

- CE611L



- CE611R



Rear

- CE611L



- CE611R



Features

- **Supports HDBaseT technology**
 - Extends video, audio, USB, and RS-232 signals via a single Cat6 / 6a / ATEN 2L-2910 Cat 6 cable
 - Enhanced bit error detection and correction to resist signal interference during high-quality video transmissions
 - Status detection and LED indication for HDBaseT signal transmission on remote unit
- **Long distance with superior video quality** – up to 1920 x 1200 @ 100 m (Cat 6 / 6a / ATEN 2L-2910 Cat 6)
- USB 2.0 full speed ports – ensure fast transmission speeds for peripherals
- Supports individual 2-channel stereo audio for high-quality audio applications
- Built-in 8KV / 15KV ESD protection (Contact voltage 8KV; Air voltage 15KV)

Specifications

	CE611L	CE611R
Connectors		
Console Ports	N/A	1 x DVI-D Female (White) 2 x USB Type A Female 1 x Mini Stereo Jack Female (Green) 1 x Mini Stereo Jack Female (Pink)
KVM Ports	1 x DVI-D Female (White) 1 x USB Type B Female (White) 1 x Mini Stereo Jack Female (Green) 1 x Mini Stereo Jack Female (Pink)	N/A
RS-232	1 x DB-9 Female (Black); Type: DTE	1 x DB-9 Female (Black); Type: DTE
Power	1 x DC Jack with locking	
Unit To Unit	1 x RJ-45 Female (Black)	
LEDs		
Power	1 (Green)	
Link	1 (Orange)	
Video Output	N/A	1 (Orange)
Video	Up to 1600 x 1200 & 1920 x 1200 @ 90 m (Cat 5e) / 100 m (Cat 6 / 6a / ATEN 2L-2910 Cat 6) 1920 x 1080 @100 m(Cat 5e / 6 / 6a)	
Power Consumption	DC5V: 2.494W	DC5V: 4.816W
Environmental		
Operating Temperature	0 – 40°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal	
Weight	0.35 kg (0.77 lb)	0.34 kg (0.75 lb)
Dimensions (L x W x H)	12.80 x 8.69 x 2.50 cm (5.04 x 3.42 x 0.98 in.)	
Carton Lot	5 sets	
Included Accessories	2x Power Adapters	

Note: CE611 does not support HDCP.

Optional Accessories

Type	Part No. / Spec.	Page No.
HDBaseT Cat 6 Cable	2L-2910	5-25

CE610A

USB DVI HDBaseT KVM Extender with ExtremeUSB®



Front

- CE610AL / CE610AR



Rear

- CE610AL



- CE610AR



Features

- Supports HDBaseT connectivity technology
- Single Cat 5e cable extends KVM to a remote site
- Superior Video Quality – up to 1920 x 1200 @ 60Hz at 100 m
- Anti-jamming – resists signal interference during high-quality video transmissions using HDBaseT technology
- ExtremeUSB® – supports transparent USB 2.0 signals and true plug-and-play (no software or drivers required)
- USB 2.0 Support* – connects devices such as keyboard, mouse, flash drive, printer, touch panel, USB 1.1 web cameras and other USB devices which require moderate amounts of bandwidth
- Built-in 8KV / 15KV ESD protection (Contact voltage 8KV; Air voltage 15KV)

Note: * The CE610A supports a maximum combined USB transfer rate of 40 Mbps for attached USB devices.


Specifications

	CE610AL	CE610AR
Connectors		
Video In	1 x DVI-D Female (White)	N/A
Video Output	N/A	1 x DVI-D Female (White)
Power	1 x DC Jack	
Firmware Upgrade	1 x mini-USB	
USB Port	1 x USB Type B Female (White)	3 x USB Type A Female (White)
Unit To Unit	1 x RJ-45 Female (Black)	
LEDs		
Power	1 (Green)	
Link	1 (Green)	
USB	1 (Green)	
Video	1 (Green)	
USB	USB 2.0 (Transfer Rate: Up to 40 Mbps)	
Video	1920 x 1200 @ 60Hz (100 m)	
Power Consumption	DC5V: 1.99W	DC5V: 3.95W
Environmental		
Operating Temperature	0 – 40°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal	
Weight	0.62 kg (1.37 lb)	
Dimensions (L x W x H)	18.20 x 11.79 x 2.87 cm (7.17 x 4.64 x 1.13 in.)	
Carton Lot	5 sets	
Included Accessories	1x Custom DVI Cable; 1x USB Cable; 2x Power Adapters; 1x Mounting Kit	

Note: For the CE610AR, power consumption will be 13.25W when all 3 USB ports are being used.

Optional Accessories

Type	Part No. / Spec.	Page No.
USB DVI-D Single Link KVM Cables	2L-7D02U (1.8 m), 2L-7D03U (3 m), 2L-7D05U (5 m)	12-3
HDBaseT Cat 6 Cable	2L-2910	5-25

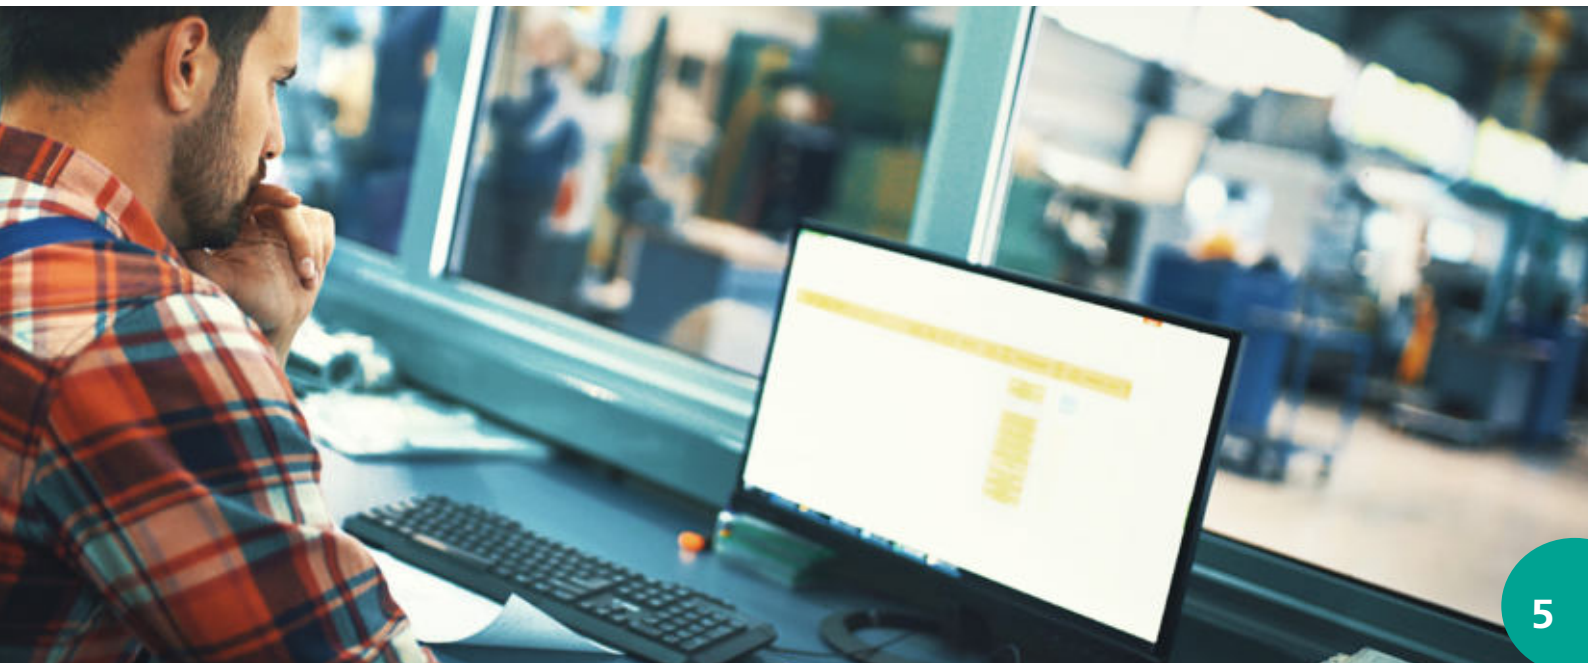

Benefits of ATEN Fiber Optic KVM Extenders

ATEN Fiber KVM extenders utilize single-mode or multi-mode fiber optic cables to extend AV, RS-232, or USB signals at extremely long distances up to 20km, with zero latency as well as resistance to environmental interference.



Uncompressed Video Transmission

Delivers up to 1920 x 1200 uncompressed video.



Dual-Console Control

Control your system from both the local and the remote USB keyboard, monitor, and mouse consoles.



Extremely Long Distance Extension

Transmits signals at extremely long distances up to 20km.



Extra Reliability & Stability

Strict testing process with 50,000 hours burn-in test and 1,000 times power on/off test.



EMI Resistance

Resistance to electromagnetic interference in the environment enables highly secure signal transmission.



Remote Wake-up PC Function

Allows user to simply push a button to remote wake up the PC from Standby Mode.

CE680 / CE690

USB DVI Optical KVM Extender



• CE680



• CE690



Front

• CE680L / CE690L



• CE680R / CE690R



Rear

• CE680L / CE690L



• CE680R / CE690R



Note: The optical fiber modules are color-coded with:

- CE680L: Blue
- CE680R: Yellow
- CE690L: Purple
- CE690R: White

Features

- Superior video quality up to 1920 x 1200 @ 60Hz (24-bit) – receives an excellent, crisp image on your screen over long distances (CE680: up to 600 m, CE690: up to 20 km)
- **Touchscreen support** – connects a generic touchscreen, including up to 10-point multi-touch devices, to accommodate highly interactive applications (no extra drivers needed)
- **Dual console operation** – control your system from both the local and remote USB keyboard, monitor, and mouse consoles
- **Single fiber optic cable allows access to a computer or KVM installation from local / remote consoles**
- HDCP compatible
- RS-232 serial port – connects to a serial terminal or serial devices, such as touch screens and barcode scanners (Baud Rate: 115200 bps)
- PC Wakeup support – uses a pushbutton on a Remote Unit to wake a PC at the local site via RS-232
- Audio Enabled – supports stereo speakers and microphone
- Rack-mountable

Note: CE680 supports OM3 multi-mode fiber.

Specifications

	CE680L / CE690L	CE680R / CE690R
Connectors		
Console Ports	3 x USB Type A Female (White); 1 x DVI-D Female (White); 1 x Mini Stereo Jack Female (Green); 1 x Mini Stereo Jack Female (Pink)	
KVM Ports	2 x USB Type B Female (White) 1 x DVI-D Female (White) 1 x Mini Stereo Jack Female (Green) 1 x Mini Stereo Jack Female (Pink)	N/A
RS-232	1 x DB-9 Female (Black)	1 x DB-9 Male (Black)
Power	1 x DC Jack (Black)	
Unit To Unit	1 x bi-directional SFP (LC)	
LEDs		
Local	1 (Green)	N/A
Remote	1 (Green)	
Link	1 (Green)	
Fiber Optics		
Operating Distance	CE680: 600 m with (SM) fiber; CE690: 20 km with (SM) fiber	
Wavelength	1310 / 1550 nm for SM	
Data Rate	Single fiber: 3.125G bps	
Power Consumption	DC5.3V: 6.46W	DC5.3V: 5.94W
Environmental		
Operating Temperature	0 – 50°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal	
Weight	CE680: 1.10 kg (2.42 lb); CE690: 1.12 kg (2.47 lb)	
Dimensions (L x W x H)	CE680L / CE690L: 21.50 x 16.33 x 4.18 cm (8.46 x 6.43 x 1.65 in.) CE680R / CE690R: 21.50 x 16.29 x 4.18 cm (8.46 x 6.41 x 1.65 in.)	
Carton Lot	1 set	
Included Accessories	1x Custom KVM Cable; 1x USB Cable; 2x Power Adapters; 1x Mounting Kit	

Note: Operating distance is approximate. These are typical maximum distance that may vary depending on factors such as fiber type, fiber bandwidth, connector splicing, losses, modal or chromatic dispersion, environmental factors, and kinks.

Optional Accessories

Type	Part No. / Spec.	Page No.
USB DVI-D Single Link KVM Cables	2L-7D02U (1.8 m), 2L-7D03U (3 m), 2L-7D05U (5 m)	12-3



Benefits of ATEN Cat5 / Cat6 KVM Extenders

ATEN provides a wide range of long-distance extension solutions that connect via standard Cat 5e/6/6a, offering an economical solution to extend the distance between your console and the computers in your installation by up to 300m.

- **RS-232 Serial and USB Support**

The RS-232 serial / USB port provides the ability to integrate serial connectivity devices – such as barcode scanners, POS terminals, kiosk touch screens, and more – as part of the extender installation.

- **Patented Deskew Technology**

ATEN's automatic and manual delay line synchronizing functions correct the color phase and time errors that occur when RGB video signals are sent long distances over Cat 5e/6/6a cables. ATEN's Deskew technology enables you to manually tune the RGB signals to ensure stable, high-quality video in any extended video installation.

- **Exceptional Video**

Automatic signal compensation is designed into the extender. The video signal strength is automatically adjusted to compensate for the distance between the computer and the console so that the quality of the display is preserved as you get farther from the source.

CE604

USB DVI Dual View Cat 5 KVM Extender



Front

• CE604L



• CE604R



Rear

• CE604L



• CE604R



Features

- Transmit speaker, keyboard, mouse, DDC, and one DVI via one Cat 5 cable; RS-232, microphone, and another DVI by adding a second Cat 5e cable
- Supports **Dual-view** video source transmission (one PC with two video output ports)
- Audio Enabled – supports stereo speakers and microphone
- Supports Real DDC bypass and ATEN default EDID technology – set up various configurations via hotkeys
- Supports PC wakeup function via one pushbutton or hotkey
- RS-232 serial channel – connect to a serial terminal, or serial devices such as touchscreens and barcode scanners (Baud Rate up to 9600 bps)
- Compatible with other ATEN Dual-view KVM devices, such as CS1642A / CS1644A and CS1762A / CS1764A
- Superior video quality – up to 1920 x 1200 @ 60Hz at 30 m; 1024 x 768 @ 60Hz at 60 m
- Manual compensation control to adjust video signal quality in order to compensate for distance
- Built-in 8KV / 15KV ESD protection (Contact voltage 8KV; Air voltage 15KV) and 2KV surge protection

Specifications


	CE604L	CE604R
Connectors		
Console Ports	N/A	2 x USB Type A Female (White) 2 x DVI-D Female (White) 1 x Mini Stereo Jack Female (Green) 1 x Mini Stereo Jack Female (Pink)
KVM Ports	1 x USB Type B Female (White) 1 x Mini Stereo Jack Female (Green) 1 x Mini Stereo Jack Female (Pink) 2 x DVI-D Female (White)	N/A
RS-232	1 x DB-9 Female (Black)	1 x DB-9 Male (Black)
Power	1 x DC Jack (Black)	
Unit To Unit	2 x RJ-45 Female (Black)	
LEDs		
Link	1 (Green)	
Power	1 (Green)	
Video	1920 x 1200 @ 60Hz (30 m); 1024 x 768 @ 60Hz (60 m)	
Power Consumption	DC5.3V: 2.88W	DC5.3V: 2.35W
Environmental		
Operating Temperature	0 – 50°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal	
Weight	0.49 kg (1.08 lb)	
Dimensions (L x W x H)	20.20 x 8.53 x 2.50 cm (7.95 x 3.36 x 0.98 in.)	
Carton Lot	5 sets	
Included Accessories	1x Custom KVM Cable; 1x DVI Cable; 2x Power Adapters; 1x Mounting Kit	

Optional Accessories

Type	Part No. / Spec.	Page No.
USB DVI-D Single Link KVM Cables	2L-7D02U (1.8 m), 2L-7D03U (3 m), 2L-7D05U (5 m)	12-3
HDBaseT Cat 6 Cable	2L-2910	5-25
Low Skew Cable	2L-2801	5-27

CE600 / CE602

USB DVI Cat 5 KVM Extender / USB DVI Dual Link Cat 5 KVM Extender



(CE600R / CE602R)

(CE602)

Front

- CE600L / CE602L



- CE600R / CE602R



Rear

- CE600L / CE602L



- CE600R / CE602R



Features

- Features ATEN technology that allows AV transmission over one cat 5e cable
- Allows access to a computer or KVM installation from a remote console (up to 60 m)
- Superior Video Quality up to 2560 x 1600 @ 60Hz at 40 m (DVI dual link; CE602)¹; 1920 x 1200 @ 60 Hz at 30 m (CE600); 1024 x 768 @ 60 Hz at 60 m – get an excellent, crisp image on your screen over long distance transmissions
- The 2nd Cat 5e cable is used for HDCP, RS-232, microphone, and dual link (CE602 only) signals
- Manual compensation control to adjust signal strength in order to compensate for distance
- RS-232 serial ports – connect to a serial terminal, or serial devices such as touchscreens and barcode scanners (Baud Rate up to 115200 bps)
- Audio Enabled – supports stereo speakers and microphone
- Built-in 8KV /15KV ESD protection (Contact voltage 8KV; Air voltage 15KV)
- Rack mountable
- Firmware upgradable

Note: 1. DVI dual link uses two Cat 5e cables to transmit 2560 x 1600 @ 60Hz. When the data rate on each cable is less than 1920 x 1200 @ 60Hz, the transmission distance becomes longer. The length of the 2 Cat 5e cables needs to be the same when transmitting dual link signals.

Specifications


	CE600L / CE602L	CE600R / CE602R
Connectors		
Console Ports	N/A	2 x USB Type A Female (White) 1 x DVI-D Female (White) 1 x Mini Stereo Jack Female (Green) 1 x Mini Stereo Jack Female (Pink)
KVM Ports	1 x DVI-D Female (White) 1 x Mini Stereo Jack Female (Green) 1 x Mini Stereo Jack Female (Pink) 1 x USB Type B Female (White)	N/A
RS-232	1 x DB-9 Female (Black)	1 x DB-9 Male (Black)
Power	1 x DC Jack	
Sub / Main	2 x RJ-45 Female (Black)	
LEDs		
Link	1 (Green)	
Power	1 (Green)	
Emulation		
Keyboard / Mouse	USB	
Video	2560 x 1600 @ 60Hz (40 m, Dual Link; CE602); 1024 x 768 @ 60Hz (60 m); 1920 x 1200 @ 60Hz (30 m; CE600)	
Power Consumption	CE600L: DC5.3V: 1.92W CE602L: DC5.3V: 2.68W	CE600R: DC5.3V: 1.69W CE602R: DC5.3V: 5.02W
Environmental		
Operating Temperature	0 – 50°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal	
Weight	0.48 kg (1.06 lb)	
Dimensions (L x W x H)	20.20 x 8.54 x 2.50 cm (7.95 x 3.36 x 0.98 in.)	CE600R: 20.20 x 8.50 x 2.50 cm (7.95 x 3.35 x 0.98 in.) CE602R: 20.20 x 8.68 x 2.50 cm (7.95 x 3.42 x 0.98 in.)
Carton Lot	5 sets	
Included Accessories	1x Custom KVM Cable; 2x Power Adapters; 1x Mounting Kit	

Optional Accessories

Type	Part No. / Spec.	Page No.
USB DVI-D Dual Link KVM Cables	CE602: 2L-7D02UD (1.8 m), 2L-7D03UD (3 m), 2L-7D05UD (5 m)	12-3
USB DVI-D Single Link KVM Cables	CE600: 2L-7D02U (1.8 m), 2L-7D03U (3 m), 2L-7D05U (5 m)	12-3
HDBaseT Cat 6 Cable	2L-2910	5-25
Low Skew Cable	2L-2801	5-27

CE800B

USB VGA/Audio Cat 5 KVM Extender with USB Flash Storage



(CE800BL)

Front

- CE800BL



- CE800BR



Rear

- CE800BL / CE800BR



Features

- Uses a single Cat 5e cable to connect the local and remote units up to 250 m (825 ft)
- **Dual console operation** – control your system(s) from both the local and remote consoles
- **Gain Control** – automatically or manually adjusts signal strength to compensate for distance
- Pushbutton selection of the active console
- Built-in USB port for external USB storage compliant flash drives for easy file sharing
- Special security feature requires login when attaching an external USB storage device on the remote unit
- Supports VGA, SVGA, and Multisync monitors; local monitor supports DDC, DDC2, and DDC2B
- Superior video quality – up to 1600 x 1200 @ 60Hz
- Built-in 8KV / 15KV ESD protection and 2KV surge protection
- Supports stereo speakers and stereo microphone
- Supports Microsoft Intellimouse and the scrolling wheel on most mice
- Built-in ASIC for greater reliability and compatibility
- Firmware upgradable

Specifications

	CE800BL	CE800BR
Computer Connections	1	N/A
Connectors		
Console Ports	2 x USB Type A Female (White); 1 x HDB-15 Female (Blue); 1 x Mini Stereo Jack (Green); 1 x Mini Stereo Jack (Pink)	
KVM Ports	1 x SPHD-15 Female (Yellow) 1 x USB Type B (Female) 1 x USB Type A (Female) 1 x Mini Stereo Jack (Green) 1 x Mini Stereo Jack (Pink)	1 x USB Type A (Female)
Firmware Upgrade	1 x 4-conductor 3.5 mm Jack	N/A
Power	1 x DC Jack	
Unit To Unit	1 x RJ-45	
LEDs		
Local	1 (Green)	N/A
Remote	1 (Green)	
Link	N/A	1 (Green)
Compensation	N/A	1 (Orange)
Video	1920 x 1200 @ 60Hz at 30 m; 1600 x 1200 @ 60Hz at 150 m; 1024 x 768 @ 60Hz at 250 m	
Power Consumption	DC5V: 2.67W	DC5V: 4.75W
Environmental		
Operating Temperature	0 – 50°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal	
Weight	0.51 kg (1.12 lb)	0.49 kg (1.08 lb)
Dimensions (L x W x H)	20.20 x 8.63 x 2.63 cm (7.95 x 3.4 x 1.04 in.)	20.20 x 8.16 x 2.63 cm (7.95 x 3.21 x 1.04 in.)
Carton Lot	5 sets	
Included Accessories	1x Custom KVM Cable; 1x USB Cable; 1x Firmware Upgrade Cable; 2x Power Adapters; 1x Mounting Kit	

Optional Accessories

Type	Part No. / Spec.	Page No.
USB KVM Cables	2L-5301U (1.2 m), 2L-5302U (1.8 m), 2L-5303U (3 m), 2L-5305U (5 m)	12-2
HDBaseT Cat 6 Cable	2L-2910	5-25
Low Skew Cable	2L-2801	5-27

CE774 / CE775

USB VGA Dual View Cat 5 KVM Extender / USB VGA Dual View Cat 5 KVM Extender with Deskew

Extension
150 m

• CE774

Extension
300 m

• CE775



Front

- CE774L



- CE774R



Rear

- CE774L / CE775L



- CE774R / CE775R



Features

- Uses two Cat 5e / 6 cables to connect the local and remote units up to 150 m / 300 m
- **Deskew Function** – automatically synchronizes the time delay of RGB signals to compensate for distance (CE775)
- **PC wake up support** – simply use a pushbutton to wake a computer at the local site via RS-232
- **Gain Control** – automatically or manually adjusts signal strength to compensate for distance
- On Screen Display (OSD) – conveniently configure your CE775R with the intuitive OSD menu system
- **Auto Signal Compensation (ASC)**
- Supports keyboard combinations via emulation (for Sun / Mac)
- **Dual console operation** – control your system from both the local and remote USB keyboard, monitor and mouse consoles
- RS-232 serial ports – allow you to connect to a serial terminal, or serial devices such as touch screens and barcode scanners
- Superior Audio – no loss in audio quality at 150 m / 300 m
- Built-in 8KV / 15KV ESD protection (Contact voltage 8KV; Air voltage 15KV) and 2KV surge protection

Specifications

	CE774L / CE775L	CE774R / CE775R
Connectors		
Console Ports	2 x USB Type A Female (White); 2 x HDB-15 Female (Blue); 1 x Mini Stereo Jack Female (Green); 1 x Mini Stereo Jack Female (Pink)	
KVM Ports	1 x SPHD-17 Female (Yellow) 1 x Mini Stereo Jack (Green) 1 x Mini Stereo Jack (Pink) 1 x HDB-15 Male (Blue)	N/A
RS-232	1 x DB-9 Female (Black)	1 x DB-9 Male (Black)
Power	1 x DC Jack (Black)	
Unit To Unit	2 x RJ-45 Female (Black)	
LEDs		
Local	1 (Green)	N/A
Remote	1 (Green)	
Link	N/A	1 (Green)
Emulation		
Keyboard / Mouse	USB	
Video	CE774: 1920 x 1200 @ 60Hz (30 m); 1600 x 1200 @ 60Hz (150 m) CE775: 1920 x 1200 @ 60Hz (150 m); 1280 x 1024 @ 60Hz (300 m)	
Power Consumption	CE774L: DC5.3V: 3.83W CE775L: DC5.3V: 3.9W	CE774R: DC5.3V: 5.73W CE775R: DC5.3V: 8.6W
Environmental		
Operating Temperature	0 – 50°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal	
Weight	0.69 kg (1.52 lb)	
Dimensions (L x W x H)	20.00 x 7.62 x 4.20 cm (7.87 x 3 x 1.65 in.)	20.00 x 7.63 x 4.20 cm (7.87 x 3 x 1.65 in.)
Carton Lot	5 sets	
Included Accessories	1x Custom KVM Cable; 1x VGA Cable; 2x Power Adapters; 1x Mounting Kit	

Optional Accessories

Type	Part No. / Spec.	Page No.
USB KVM Cables	2L-5301U (1.2 m), 2L-5302U (1.8 m), 2L-5303U (3 m), 2L-5305U (5 m)	12-2
HDBaseT Cat 6 Cable	2L-2910	5-25
Low Skew Cable	2L-2801	5-27

CE770

USB VGA/Audio Cat 5 KVM Extender

With Deskey



Front

- CE770L



- CE770RQ



Rear

- CE770L / CE770RQ



Features

- Uses a single Cat 5e cable to connect the local and remote units up to 300 m
- **Deskey Function** – automatically synchronizes the time delay of RGB signals to compensate for distance
- **Gain Control** – automatically or manually adjusts signal strength to compensate for distance
- **Auto Signal Compensation (ASC)**
- Supports keyboard combinations via emulation (for Sun / Mac)
- **Dual console operation** – control your system from both the local and remote USB keyboard, monitor and mouse consoles
- Supports VGA, SVGA, SXGA, UXGA, WUXGA, and multisync monitors; local monitor supports DDC, DDC2, and DDC2B
- RS-232 serial ports – allows you to connect to serial terminals or devices, such as touchscreens and barcode scanners
- Audio Enabled – supports stereo speakers and microphone
- Built-in 8KV / 15KV ESD protection (Contact voltage 8KV; Air voltage 15KV) and 2KV surge protection
- Firmware upgradable
- Rack mountable

Specifications

	CE770L	CE770RQ
Connectors		
Console Ports	2 x USB Type A Female (White); 1 x HDB-15 Female (Blue); 1 x Mini Stereo Jack Female (Green); 1 x Mini Stereo Jack Female (Pink)	
KVM Ports	1 x SPHD-17 Female (Yellow), 1 x Mini Stereo Jack Female (Green), 1 x Mini Stereo Jack Female (Pink)	N/A
RS-232	1 x DB-9 Female (Black)	1 x DB-9 Male (Black)
Power	1 x DC Jack (Black)	
Unit To Unit	1 x RJ-45 Female (Black)	
LEDs		
Local	1 (Green)	N/A
Remote	1 (Green)	N/A
B	N/A	1 (Blue)
G	N/A	1 (Orange/Green)
R	N/A	1 (Red)
Emulation		
Keyboard / Mouse	USB	
Video	1920 x 1200 @ 60Hz (150 m); 1280 x 1024 @ 60Hz (300 m); DDC, DDC2, DDC2B	
Power Consumption	DC5.3V: 2.74W	DC5.3V: 4.54W
Environmental		
Operating Temperature	0 – 50°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal	
Weight	0.49 kg (1.08 lb)	
Dimensions (L x W x H)	20.20 x 8.64 x 2.50 cm (7.95 x 3.4 x 0.98 in.)	
Carton Lot	5 sets	
Included Accessories	1x Custom KVM Cable; 2x Power Adapters; 1x Mounting Kit	

Optional Accessories

Type	Part No. / Spec.	Page No.
USB KVM Cables	2L-5301U (1.2 m), 2L-5302U (1.8 m), 2L-5303U (3 m), 2L-5305U (5 m)	12-2
HDBaseT Cat 6 Cable	2L-2910	5-25
Low Skew Cable	2L-2801	5-27

CE750A

USB VGA/Audio Cat 5 KVM Extender



Front

- CE750AL



- CE750AR



Rear

- CE750AL / CE750AR



Features

- Uses a single Cat 5e cable to connect the local and remote units up to 200 m
- [Gain Control](#) – automatically or manually adjusts signal strength to compensate for distance
- [Auto Signal Compensation \(ASC\)](#)
- [Dual console operation](#) – control your system from both the local and remote USB keyboard, monitor and mouse consoles
- Superior video quality – up to 1920 x 1200 @ 60Hz at 30 m, 1600 x 1200 @ 60Hz at 150 m, and 1280 x 1024 @ 60Hz at 200 m
- Supports VGA, SVGA, SXGA, UXGA, and Multisync monitors; local monitor supports DDC, DDC2, and DDC2B
- Supports stereo speakers and stereo microphone
- RS-232 serial ports – allow you to connect to a serial terminal for configuration (Local Unit) or serial devices such as touchscreens and barcode scanners (Remote Unit)
- Built-in 8KV / 15KV ESD protection (contact voltage 8KV, air voltage 15KV) and 2KV surge protection
- Firmware upgradable
- Rack mountable

Specifications

	CE750AL	CE750AR
Connectors		
Console Ports	2 x USB Type A Female (White) 1 x HDB-15 Female (Blue) 1 x Mini Stereo Jack Female (Green) 1 x Mini Stereo Jack Female (Pink)	
KVM Ports	1 x SPHD-15 Female (Yellow) 1 x Mini Stereo Jack Female (Green) 1 x Mini Stereo Jack Female (Pink)	N/A
RS-232	1 x DB-9 Female (Black)	1 x DB-9 Male (Black)
Power	1 x DC Jack (Black)	
Unit To Unit	1 x RJ-45 Female (Black)	
LEDs		
Remote	1 (Green)	
Link	N/A	1 (Green)
Local	1 (Green)	N/A
Picture Compensation	N/A	1 (Orange)
Emulation		
Keyboard / Mouse	USB	
Video	1920 x 1200 @ 60Hz at 30 m; 1600 x 1200 @ 60Hz at 150 m; 1280 x 1024 @ 60Hz at 200 m	
Power Consumption	DC5.3V: 2.44W	DC5.3V: 3.27W
Environmental		
Operating Temperature	0 – 50°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal	
Weight	0.47 kg (1.04 lb)	
Dimensions (L x W x H)	20.20 x 8.63 x 2.50 cm (7.95 x 3.4 x 0.98 in.)	20.20 x 8.51 x 2.50 cm (7.95 x 3.35 x 0.98 in.)
Carton Lot	5 sets	
Included Accessories	1x Custom KVM Cable; 2x Power Adapters; 1x Mounting Kit	

Optional Accessories

Type	Part No. / Spec.	Page No.
USB KVM Cables	2L-5301U (1.2 m), 2L-5302U (1.8 m), 2L-5303U (3 m), 2L-5305U (5 m)	12-2
HDBaseT Cat 6 Cable	2L-2910	5-25
Low Skew Cable	2L-2801	5-27

CE700A

USB VGA Cat 5 KVM Extender



Front

• CE700AL



• CE700AR



Rear

• CE700AL / CE770AR



Features

- Uses a single Cat 5e cable to connect the local and remote units up to 150 m
- [Automatic Gain Control](#) – adjusts signal strength to compensate for distance
- [Auto Signal Compensation \(ASC\)](#)
- [Dual console operation](#) – control your system from both the local and remote USB keyboard, monitor, and mouse consoles
- Built-in ASIC for greater reliability and compatibility
- Supports VGA, SVGA, SXGA, UXGA, WUXGA, and Multisync monitors; local monitor supports DDC, DDC2, and DDC2B
- Built-in 8KV / 15KV ESD protection (Contact voltage 8KV; Air voltage 15KV) and 2KV surge protection
- Superior video quality – up to 1920 x 1200 @ 60Hz (30 m); 1600 x 1200 @ 60Hz (100 m); 1280 x 1024 @ 60Hz (150 m)
- Rack mountable
- Easy to install – no software required; connecting cables to the devices is all it takes

Specifications

	CE700AL	CE700AR
Connectors		
Console Ports	2 x USB Type A Female (White) 1 x HDB-15 Female (Blue)	
KVM Ports	1 x SPHD-17 Female (Green)	N/A
Power	1 x DC Jack (Black)	
Unit To Unit	1 x RJ-45 Female (Black)	
LEDs		
Local	1 (Green)	N/A
Remote	1 (Green)	
Link	N/A	1 (Green)
Emulation		
Keyboard / Mouse	USB	
Video	1920 x 1200 @ 60Hz (30 m) 1600 x 1200 @ 60Hz (100 m) 1280 x 1024 @ 60Hz (150 m)	
Power Consumption	DC5.3V: 2.17W	DC5.3V: 1.59W
Environmental		
Operating Temperature	0 – 50°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal	
Weight	0.33 kg (0.73 lb)	0.32 kg (0.7 lb)
Dimensions (L x W x H)	12.70 x 8.65 x 2.50 cm (5 x 3.41 x 0.98 in.)	12.70 x 8.14 x 2.50 cm (5 x 3.2 x 0.98 in.)
Carton Lot	5 sets	
Included Accessories	1x Custom KVM Cable; 2x Power Adapters; 1x Mounting Kit	

Optional Accessories

Type	Part No. / Spec.	Page No.
USB KVM Cables	2L-5201U (1.2 m), 2L-5202U (1.8 m), 2L-5203U (3 m), 2L-5205U (5 m)	12-2
HDBaseT Cat 6 Cable	2L-2910	5-25
Low Skew Cable	2L-2801	5-27

CE100

USB VGA Cat 5 Mini KVM Extender

Most Compact Solution for Remote Access



Front

• CE100L



• CE100R



Rear

• CE100L / CE100R



Features

- Uses a single Cat 5e cable to connect the local and remote units up to 100 m
- Supports real-time DDC communication when remote display is unplugged and plugged
- Support manual compensation adjustment for better video quality
- Extends local PC VGA/keyboard/mouse to remote side
- Easily add or remove computers connected to the installation
- Superior video quality – up to 1920 x 1200
- Allow access to a computer from the remote console up to 100 m distance
- No external power supply needed for local unit
- Built-in 8KV / 15KV ESD protection (Contact voltage 8KV; Air voltage 15KV)
- Wall mountable

Specifications

	CE100L	CE100R
Connectors		
Console Ports	N/A	2 x USB Type A Female (White) 1 x HDB-15 Female (Blue)
KVM Ports	1 x USB Type B Female (White) 1 x HDB-15 Male (Blue)	N/A
Power	1 x DC Jack	
Unit To Unit	1 x RJ-45 Female (Black)	
LEDs		
Link	1 (Blue)	
Power	1 (Green)	
Video	1920 x 1200 @ 60 Hz (30 m); 1280 x 1024 @ 60 Hz (100 m)	
Power Consumption	DC5V: 0.68W	DC5V: 0.99W
Environmental		
Operating Temperature	0 – 50°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal	
Weight	0.17 kg (0.37 lb)	
Dimensions (L x W x H)	9.10 x 5.74 x 2.40 cm (3.58 x 2.26 x 0.94 in.)	
Carton Lot	20 sets	
Included Accessories	1x Custom KVM Cable; 1x Power Adapter; 1x Mounting Kit	

Optional Accessories

Type	Part No. / Spec.	Page No.
HDBaseT Cat 6 Cable	2L-2910	5-25
Low Skew Cable	2L-2801	5-27

CE350 / CE370

PS/2 VGA/Audio Cat 5 KVM Extender / with Deskew

Extension
150 m
• CE350

Extension
300 m
• CE370



Front

• CE350L / CE370L



• CE350R



• CE370RQ



Rear

• CE350L / CE350R

• CE370L / CE370RQ



Features

- Uses a single Cat 5e cable to connect the local and remote units up to 150 m (CE350) and 300 m (CE370)
- **Deskew Function (CE370)** – automatically synchronizes the time delay of RGB signals to compensate for distance
- **Gain Control** – automatically or manually adjusts signal strength to compensate for distance
- **Auto Signal Compensation (ASC) and storage of settings**
- **Dual console operation** – control your system from both the local and remote keyboard, monitor, and mouse consoles
- Built-in ASIC for greater reliability and compatibility
- RS-232 serial ports – connect to a serial terminal, or serial devices such as touchscreens and barcode scanners (Baud Rate up to 115,200 bps)
- Audio Enabled – supports stereo speakers and microphone
- Built-in 8KV / 15KV ESD protection (Contact voltage 8KV; Air voltage 15KV) and 2KV surge protection
- Supports VGA, SVGA, SXGA, UXGA, WUXGA, and Multisync monitors; local monitor supports DDC, DDC2, and DDC2B
- Firmware upgradable
- Rack mountable

Specifications

	CE350L / CE370L	CE350R / CE370RQ
Connectors		
Console Ports	1 x 6-pin Mini-DIN Female (Purple) 1 x HDB-15 Female (Blue) 1 x 6-pin Mini-DIN Female (Green) 1 x Mini Stereo Jack Female (Green) 1 x Mini Stereo Jack Female (Pink)	
KVM Ports	1 x SPHD-17 Female (Yellow) 1 x Mini Stereo Jack (Green) 1 x Mini Stereo Jack (Pink)	N/A
RS-232	1 x DB-9 Female (Black)	1 x DB-9 Male (Black)
Power	1 x DC Jack	
Unit To Unit	1 x RJ-45 Female (Black)	
Emulation		
Keyboard / Mouse	PS/2	
Video	CE350: 1920 x 1200 @ 60Hz (30 m); 1600 x 1200 @ 60Hz (150 m) ; DDC, DDC2, DDC2B CE370: 1920 x 1200 @ 60Hz (150 m); 1280 x 1024 @ 60Hz (300 m); DDC, DDC2, DDC2B	
Power Consumption	CE350L: DC5.3V: 2.87W CE370L: DC5.3V: 2.70W	CE350R: DC5.3V: 4.85W CE370RQ: DC5.3V: 4.53W
Environmental		
Operating Temperature	0 – 50°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal	
Weight	0.50 kg (1.1 lb)	CE350: 0.50 kg (1.1 lb) CE370: 0.49 kg (1.08 lb)
Dimensions (L x W x H)	20.20 x 8.64 x 2.50 cm (7.95 x 3.4 x 0.98 in.)	
Carton Lot	5 sets	
Included Accessories	1x Custom KVM Cable; 2x Power Adapters; 1x Mounting Kit	

Optional Accessories

Type	Part No. / Spec.	Page No.
PS/2 KVM Cables	2L-5302P (1.8 m), 2L-5303P (3 m), 2L-5305P (5 m)	12-2
Cables & Converters for USB Interface Support*	PC compatible: 2L-5202UP (1.8 m), 2L-5203UP (3 m), 2L-5205UP (5 m), 2L-5206UP (6 m)	12-1
HDBaseT Cat 6 Cable	2L-2910	5-25
Low Skew Cable	2L-2801	5-27

CE250A

PS/2 VGA Cat 5 KVM Extender



Front

- CE250AL



- CE250AR



Rear

- CE250AL / CE250AR



Features

- Uses a single Cat 5e cable to connect the local and remote units up to 150 m
- **Automatic Gain Control** – adjusts signal strength to compensate for distance
- **Dual console operation** – control your system from both the local and remote PS/2 keyboard, mouse and monitor consoles
- Superior video quality – up to 1280 x 1024 @ 60Hz
- Supports VGA, SVGA, and Multisync monitors; local monitor supports DDC, DDC2, and DDC2B
- Supports Microsoft Intellimouse and the scrolling wheel on most mice
- Built-in 8KV ESD protection and 2KV surge protection
- Local unit takes its power from the computer - external power is only required when the power from the local computer / computers in the KVM installation is insufficient
- Rack-mountable

Specifications

	CE250AL	CE250AR
Console Selection	1 x Pushbutton	
Connectors		
Console Ports	1 x 6-pin Mini-DIN Female (Purple) 1 x HDB-15 Female (Blue) 1 x 6-pin Mini-DIN Female (Green)	
KVM Ports	1 x SPHD-15 Female	N/A
Power	1 x DC Jack	
Unit To Unit	1 x RJ-45 Female (Black)	
LEDs		
Local	1 (Green)	N/A
Remote	1 (Green)	N/A
Power	N/A	1 (Green)
Online	N/A	1 (Green)
Emulation		
Keyboard / Mouse	PS/2	
Video	1280 x 1024 @ 60Hz (150 m); DDC; DDC2; DDC2B	
Power Consumption	DC5V: 0.62W	DC5V: 1.21W
Environmental		
Operating Temperature	0 – 50°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal	
Weight	0.33 kg (0.73 lb)	0.32 kg (0.7 lb)
Dimensions (L x W x H)	12.70 x 8.66 x 2.63 cm (5 x 3.41 x 1.04 in.)	12.70 x 8.15 x 2.63 cm (5 x 3.21 x 1.04 in.)
Carton Lot	5 sets	
Included Accessories	1x Custom KVM Cable; 1x Power Adapter; 1x Mounting Kit	

Optional Accessories

Type	Part No. / Spec.	Page No.
PS/2 KVM Cables	2L-5201P (1.2 m), 2L-5202P (1.8 m), 2L-5203P (3 m), 2L-5206P (6 m)	12-1
Cables & Converters for USB Interface Support*	PC compatible: 2L-5202UP (1.8 m), 2L-5203UP (3 m), 2L-5205UP (5 m), 2L-5206UP (6 m)	12-1
HDBaseT Cat 6 Cable	2L-2910	5-25
Low Skew Cable	2L-2801	5-27

2L-2910

305M HDBaseT SF/UTP Cat 6 Cable



The 2L-2910 is a twisted-pair cable engineered for optimum signal transmission at resolutions up to 4K including digital and analog data, audio, and video applications. The cable supports sweep frequency up to 400 MHz and has been verified to meet performance requirements set by the HDBaseT Alliance.


The 2L-2910 supports long-distance connections while safeguarding transmission quality. The outer metal layer and the braid protect signal transmissions from electromagnetic interference and reduce the impact caused by electrical noise.

The 2L-2910 utilizes SF/UTP design with four unshielded 23 AWG twisted pair conductors. Among the four unshielded twisted pair conductors, there is one cross filler to reduce cross talk. Most importantly, the cable meets the requirements set by ANSI/TIA-568-C.2 (2009) ensuring high performance in electrical transmission.



5

KVM Extenders

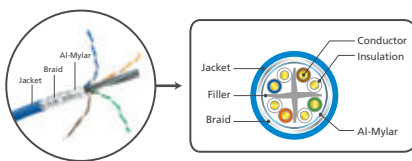

Features

- Optimized for multiple distributions including HD video, audio, Ethernet, power, and control
- Verified to meet performance requirements set by HDBaseT Alliance
- Supports sweep frequency up to 400 MHz
- Supports up to 4K data transmission
- Conductor material: 23 AWG bare copper
- Outer shielded material: Al Mylar tape
- Braid wire: tinned copper
- Flame test UL 1685 (CM rated), RoHS compliant
- Compatible with ATEN HDBaseT extenders and splitters
- Regulatory:
 - PoE: IEEE 802.3af (PoE)/ IEEE 802.3at (PoE+)
 - Electrical Transmission: ANSI/TIA-568-C.2 (2009), ISO/IEC 11801 (Edition 2.2), IEC 61156-5 (Edition 2.1)
 - Material and Construction: UL 444, CSA 22.2 NO.214




2L-2910 Specifications

	2L-2910
Cable Type	Cat 6 SF/UTP
Conductor	
Size	23 AWG
Construction	Solid Bare copper
Number of Pairs	4
Insulation	
Material	Polyolefin
Color codes	Blue & White/Blue stripe 1.08 ± 0.02 mm; Orange & White/Orange stripe 1.05 ± 0.02 mm Green & White/Green stripe 1.08 ± 0.02 mm; Brown & White/Brown stripe 1.05 ± 0.02 mm
Shield	
Material	Al Mylar tape
Coverage	100% Coverage and mylar side facing out
Filler	Polyolefin (PO)
Braid	Tinned Copper
Electrical	
Dc Resistance Unbalance	≤ 5%
Conductor Resistance	≤ 9.38 Ω/100m
Dielectric strength	1.5 KV ac for 2 s
Insulation resistance	≥ 5000 MΩ•km
Mutual Capacitance	≤ 5.6 nF/100m
Pair-To-Ground Capacitance Unbalance	≤ 330 pF/100m
Ac Leakage Current Throught Overall Jacket	≤ 10mA (1.5KV AC)
Spark Test	2.5 KV DC
Minimum bending radius	≥4 times of overall diameter
Delay Skew	45.00 Max.ns/100m
Jacketed	
Material	Polyvinyl chloride (PVC)
Average Thickness	0.5 mm±-0.05mm
Diameter	7.4 ± 0.20 mm
Color	Blue
Environmental	
Temperature (Operating / Storage)	-20°C – 60°C
Physical Properties	
Weight	17.57 kg (38.7 lb)
Cable Length	305 m / 1000 ft

2L-2801

305M Low Skew Cat 5e Cable

Analog video presents a high-quality image when the computer is directly connected to the monitor by short cables. "Skew" is the color phase and time errors that occur when R/G/B video signals are sent over long-distance Cat 5e cables, which can result in smeared, less sharp and color-fringed images. To remedy this distortion, ATEN developed a Low Skew Cat 5e cable. This high-performance cable is suitable for the audio and video transmission of a wide range of video and KVM extenders. To eliminate blur and bleeding images and to ensure clear video transmissions, use 2L-2801 Low Skew Cat 5e Cable.

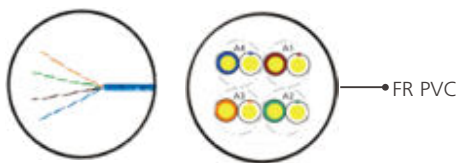

Features

- Supports high-quality RGB video transmissions
- Contains 305 m (1000 ft.) low skew cable
- Delay Skew: 1 – 350 MHz 20nS/100 m Max.
- Outer jacket material: FR PVC
- Outer shielded material: unshielded
- Conductor material: 24 AWG solid bare copper
- Compatible with ATEN analog Cat 5 video extenders, KVM extenders, and Cat 5 KVM switches
- UL, ETL approved





2L-2801 Specifications

	2L-2801
Item	24AWG x 4p
Cable Length	305 m/1000 ft
Conductor Resistance	9.38 Ohm/100m/20°C Max.
Mutual Capacitance	56 Pf/M Max.
Dielectric strength	Ac 1.5 Kv/2 Sec.
Spark Test	2.5 Kv
Insulation	
Unaged	Tensile Strength: 2400 Psi Min. (1.69 Kg/M(mxm)) Elongation: 300% Min.
Aged	Tensile Strength: Unaged Min. 75% (100°Cx48hrs) Elongation: Unaged Min. 75% (100°Cx48hrs)
Jacketed	
Unaged	Tensile Strength: 2000 Psi Min. (1.41 Kg/M(mxm)) Elongation: 100% Min.
Aged	Tensile Strength: Unaged Min. 85% (100°Cx240hrs) Elongation: Unaged Min. 50% (100°Cx240hrs)
Insulation Shrinkback	150m/M, 121°C±1°Cx1hr ≤ 9.5m/M
Cold Bend Test	-20°Cx4hrs No.Crack
Flame Retardant Test	CMR
Ac Leakage Current Throught Overall Jacket	Ac 1500v ≤ 10 Ma
Dc Resistance Unbalance	5% Max.
Pair-To-Ground Capacitance Unbalance	330 Pf/100m Max.
Characteristic Impedance	1 – 350 Mhz 100±15 Ohms
Structural Return Loss	350 Mhz 10.6db Min.
Propagation Delay	350 Mhz 536ns/100m Max.
Delay Skew	1 – 350 Mhz 20ns/100m Max.
Physical Properties	
Weight	9.80 kg

Cable KVM Switches

ATEN's patented all-in-one design eliminates the clutter and bother of connecting separate keyboard, video, and mouse cables by consolidating them into a single cable and building that cable right into the switch. The result is a smart-looking, neat, and tidy work environment.

Cable KVM Switches are offered in PS/2, USB, and a combination of both PS/2 and USB configurations. Users can choose the switch that matches their hardware – even combining USB and PS/2 keyboards and mice.



- **Boundless Switching**

ATEN Boundless Switching technology provides intuitive mouse cursor switching by allowing you to move your mouse across screen/window boundaries to switch between video sources.

- **Flexible Port Selection**

For flexibility and convenience there are three ways to switch ports: with hotkeys from the keyboard, mouse port switching, and by clicking with the remote port selector device. Hotkeys provide more control of the focus, while the remote selector device saves the bother of remembering the appropriate hotkey combinations. In addition, a quick and easy switching solution is to click the mouse's scroll wheel to cycle through the ports.

- **Audio Support**

Cable KVM Switches are designed with microphone and speaker support, allowing audio input/output for multimedia applications that make use of sound.

- **Flexible Focus Assignment**

The KVM focus and audio focus can be switched independently of each other, which means that users can work on the computer with the KVM focus while listening to the output of the computer with the audio focus. Users can switch the KVM focus from port to port without moving the audio focus and vice versa.

- **Multifunction Mouse Support**

Many ATEN Cable KVM Switches support multifunction mice, allowing users to make full use of their mice across a broad spectrum of multimedia applications.

- **USB Peripheral Sharing**


A 2- or 4-port USB hub can be connected to the USB console ports, allowing USB peripherals to connect to the switch and be shared by all the computers on the installation.

- **Video DynaSync™**

Exclusive ATEN technology eliminates boot-up display problems and optimizes resolutions when switching among different sources.

Note:

The features highlighted above are not available in all products. Please refer to each product page for more details. Product information is subject to change without prior notice.

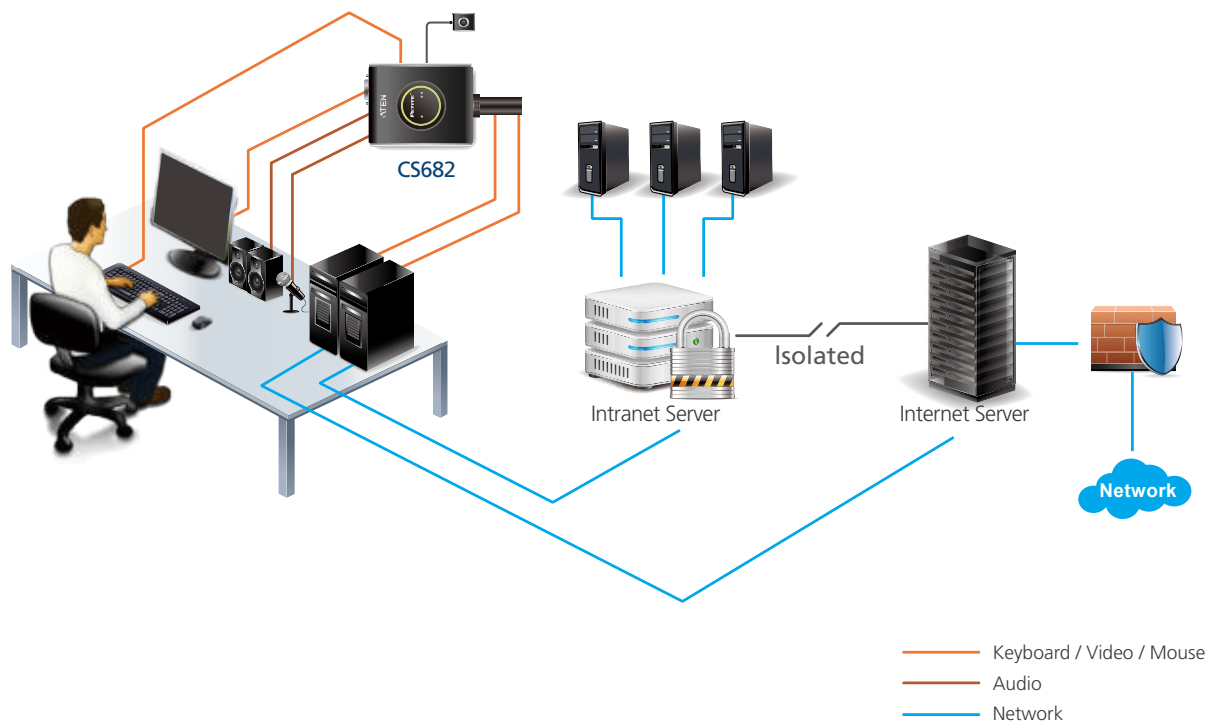

Feature Comparison

Model No.		CV211	CS62KM	CS22DP	CS22H	CS692
Ports		1	2	2	2	2
Interface	Keyboard, Mouse	USB	USB	USB	USB	USB
	Video	VGA	USB	DisplayPort	HDMI	HDMI
Platform Support		Windows, Linux, Mac	Windows	Windows, Linux, Mac,	Windows, Linux, Mac	Windows, Linux, Mac
Audio		N/A	N/A	•	•	•
Cable Length		CV211 to laptop: 1.8 m CV211 to computer: 0.4 m	1.2 m	1.2 m	1.2 m	1.2 m
USB Peripheral Sharing		N/A	•	•	•	•
Video DynaSync™		N/A	N/A	N/A	N/A	•
Port Selection		N/A	Hotkey, Remote Port Selector, Mouse Wheel, Mouse Cursor	Remote Port Selector	Remote Port Selector	Hotkey, Remote Port Selector, Mouse

Model No.		CS682	CS22D	CS62U	CS62US	CS64U	CS64US
Ports		2	2	2	2	4	4
Interface	Keyboard, Mouse	USB	USB	USB	USB	USB	USB
	Video	DVI	DVI	VGA	VGA	VGA	VGA
Platform Support		Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun
Audio		•	N/A	• (Speaker)	• (Speaker)	• (Speaker)	• (Speaker)
Cable Length		1.2 m	1.2 m	1.8 m	0.9 m	1.8 m	0.9 m, 1.2 m
USB Peripheral Sharing		•	•	•	•	•	•
Video DynaSync™		•	N/A	•	•	•	•
Port Selection		Hotkey, Remote Port Selector, Mouse	Remote Port Selector	Hotkey, Mouse	Hotkey, Mouse	Hotkey	Hotkey

Model No.		CS22U	CS52A	CS62S	CS62A	CS64A
Ports		2	2	2	2	4
Interface	Keyboard, Mouse	USB	PS/2, USB	PS/2	PS/2	PS/2
	Video	VGA	VGA	VGA	VGA	VGA
Platform Support		Windows, Linux, Mac, Sun	Windows, Linux	Windows, Linux	Windows, Linux	Windows, Linux
Audio		N/A	•	N/A	• (Speaker)	• (Speaker)
Cable Length		0.9 m	0.6 m, 1.2 m	0.9 m	1.2 m	1.8 m
USB Peripheral Sharing		•	•	N/A	N/A	N/A
Video DynaSync™		N/A	N/A	N/A	N/A	N/A
Port Selection		Remote Port Selector	Hotkey, Remote Port Selector	Hotkey	Hotkey	Hotkey

CV211

Laptop USB KVM Console Crash Cart Adapter



Specifications

	CV211
Computer Connections	1
Connectors	
Laptop USB Console (LUC) Port	1 x USB Mini Type B Female
KVM (Computer) Ports	1 x USB Type A Male 1 x VGA Male (Blue)
LEDs	1 (Blue)
Power Consumption	DC5V: 2.35W
Environmental	
Operating Temperature	0 – 40°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Weight	0.13 kg (0.29 lb)
Dimensions (L x W x H)	7.05 x 5.37 x 3.01 cm (2.78 x 2.11 x 1.19 in.)
Carton Lot	10 pcs
Included Accessories	1x USB Type A to USB Mini-B Cable

Features

USB KVM Console Adapter Provides Direct Laptop-to-Computer Desktop Access

- Transforms your laptop into an ultra-mobile console for servers, computers, kiosks and ATMs
- Virtual media enables file applications, OS patching, diagnostic testing and software installation
- Upgradable firmware to keep unit up to date
- Eliminates the need for heavy and bulky crash carts
- Desktop scaling – user can adjust the size/resolution of the target computer's desktop window by size or ratio

Server and Computer Troubleshooting

- Instant BIOS-level access gives you total control of a server during hardware and operating system failures
- Bi-directional file transfers between the laptop and target computer
- Video recording and image capture feature saves a record of remote operations for future training and troubleshooting
- Mouse DynaSync™ – automatically synchronizes the laptop and target computer's mouse movements
- On-screen keyboard with multi-language support
- Supports hotkey macros – define keystrokes that execute specific actions on the target computer to complete tasks efficiently and accurately

Ease of Use

- Plug-and-Play – no software installation required on either side
- Toolbar helps users easily operate all the functions from a single-click control panel within the remote view window
- Adjustable video settings for optimal picture and performance
- USB bus-powered design with hot-plugging support

Maximum Convenience

- Built-in VGA and USB keyboard/mouse cables
- Unique cable clip design to get cables under control
- Supports analog video resolutions up to 1920 x 1200 @ 60Hz
- Compact and easy to carry – half-palm size

Optional Accessories

Type	Part No. / Spec.
DisplayPort to VGA Adapter*	VC925

Note: * For more information about the VC925, please refer to the VanCryst product catalog.

Setup > CV211



CS62KM

2-Port USB Boundless Cable KM Switch



Features

- Single USB keyboard and mouse control up to 2 computers
- [Boundless Switching](#) – allows users to switch between computers when the mouse cursor crosses the display border
- Computer selection via remote port selector, hotkey, mouse cursor, and mouse wheel¹
- Supports Windows
- No software required
- Firmware upgradable
- Supports USB hot-plugging
- Bus-powered – no external power adapter required²

Note: 1. Mouse port switching is only supported under mouse emulation mode with a USB 3-button mouse wheel.
2. The USB bus-powered design allows the switch to get power from the connected computers. It requires connection to two computers to get sufficient power supply.

Specifications

	CS62KM
Computer Connections	2
Connectors	
Console Ports	2 x USB Type A Female
KVM (Computer) Ports	2 x USB Type A Male
Remote Port Selector	1 x 2.5mm Audio Jack Female
Port Selection	Hotkey, Mouse Wheel, Mouse Cursor, Remote Port Selector
Cable Length	
Console	0.15 m
Computer	1.2 m
Remote Port Selector	1.8 m
Emulation	
Keyboard / Mouse	USB
LEDs	
Selected	2 (Green)
Power Consumption	DC5V: 0.74W
Environmental	
Operating Temperature	0 – 40°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Weight	0.12 kg (0.26 lb)
Dimensions (L x W x H)	8.45 x 3.40 x 2.21 cm (3.33 x 1.34 x 0.87 in.)
Carton Lot	10 pcs
Included Accessories	1 x Remote Port Selector

CS22DP

2-Port USB DisplayPort Cable KVM Switch with Remote Port Selector



Features

- One USB keyboard / mouse and one DisplayPort monitor control two USB DisplayPort computers
- Superior video quality – up to 4096 x 2160 @ 30Hz
- Computer selection via Remote Port Selector
- Multiplatform support – Windows, Mac and Linux
- Supports microphone and speakers
- The console USB ports can be used for USB peripheral sharing¹
- Supports USB hot-plugging
- DisplayPort 1.1 compliant; HDCP compliant
- Bus-powered – no external power adapter required

Note: 1. The CS22DP may require an external power supply via a micro USB port.

Specifications

	CS22DP
Computer Connections	2
Connectors	
Console Ports	2 x USB Type A Female 1 x DisplayPort Female 1 x 3.5mm Audio Jack Female (Green) 1 x 3.5mm Audio Jack Female (Pink)
KVM (Computer) Ports	2 x USB Type A Male 2 x DisplayPort Male 2 x 3.5mm Audio Jack Male (Green) 2 x 3.5mm Audio Jack Male (Pink)
Power (Optional)	1 x USB Micro Type B Female
Port Selection	Remote Port Selector
Video	4096 x 2160 @ 30Hz
Cable Length	
Computer	2 x 1.2 m
Remote Port Selector	1.8 m
Emulation	
Keyboard / Mouse	N/A
LEDs	
Selected	2 (White)
Power Consumption	DC5V: 1.38W
Environmental	
Operating Temperature	0 – 50°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Weight	0.35 kg (0.77 lb)
Dimensions (L x W x H)	8.34 x 8.42 x 3.04 cm (3.28 x 3.31 x 1.2 in.)
Carton Lot	20 pcs

CS22H

2-Port USB 4K HDMI Cable KVM Switch with Remote Port Selector



Features

- One USB keyboard, mouse and one HDMI monitor control two HDMI computers
- Superior video quality – up to 4K DCI (4096 x 2160 @ 60Hz)
- Computer selection via remote port selector
- Multiplatform support – Windows, Mac and Linux
- Supports microphone and speakers
- The console USB ports can be used for USB peripheral sharing¹
- Supports USB hot-plugging
- HDMI compliant; HDCP 2.2 compliant
- Hook design for space-saving and organized workstation
- Bus-powered – no external power adapter required

Note: 1. The CS22H may require an external power supply via a micro USB port.

Specifications

	CS22H
Computer Connections	2
Connectors	
Console Ports	1 x HDMI Female 2 x USB Type A Female 1 x 3.5mm Audio Jack Female (Green) 1 x 3.5mm Audio Jack Female (Pink)
KVM (Computer) Ports	2 x HDMI Male 2 x USB Type A Male 2 x 3.5mm Audio Jack Male (Green) 2 x 3.5mm Audio Jack Male (Pink)
Power (Optional)	1 x USB Micro Type B Female
Port Selection	Remote Port Selector
Video	4096 x 2160 @ 60Hz
Cable Length	
KVM	2 x 1.2 m
Remote Port Selector	1.8 m
Emulation	
Keyboard / Mouse	N/A
LEDs	
KVM Port (On Line / Selected)	2 (White)
Power Consumption	DC5V: 3.47W
Environmental	
Operating Temperature	0 – 50°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Weight	0.34 kg (0.75 lb)
Dimensions (L x W x H)	8.34 x 8.42 x 3.04 cm (3.28 x 3.31 x 1.2 in.)
Carton Lot	20 pcs



Features

- One KVM console controls two USB HDMI computers
- USB 2.0 mouse port can be used as a USB hub and for USB peripheral sharing¹
- [Video DynaSync™](#) – exclusive ATEN technology eliminates boot-up display problems and optimizes the resolution when switching among different sources
- Independent switching of the KVM and audio focus – KVM is focused on one computer while the audio is focused on the other²
- Firmware upgradable
- HDCP compliant
- Audio-enabled – full bass response provides a rich experience for 2.1 channel surround sound systems
- Compact design, all-in-one cables (2 x 1.2 m) built-in
- Power on detection
- Supports multifunction and wireless keyboards and mice
- Supports keyboard combinations via emulation (for Mac)³
- Bus-powered – no external power adapter required

Note: 1. This may require an additional power adapter. To use the USB 2.0 mouse port as a USB hub, you must first disable mouse emulation mode.
 2. HD audio through the HDMI monitor's built-in speakers cannot be switched independently.
 3. PC keyboard combinations emulate Mac keyboards. Mac keyboards work only with their own computers.

Specifications

	CS692
Computer Connections	2
Connectors	
Console Ports	1 x HDMI Female (Black), 2 x USB Type A Female, 1 x 3.5mm Audio Jack Female (Green), 1 x 3.5mm Audio Jack Female (Pink)
KVM Ports	2 x HDMI Male (Black) 2 x USB Type A Male (Purple) 2 x USB Type A Male (Black) 2 x 3.5mm Audio Jack Male (Green) 2 x 3.5mm Audio Jack Male (Pink)
Port Selection	Hotkey, Remote Port Selector, Mouse
Cable Length	
Computer	2 x 1.2 m
Remote Port Selector	1.8 m
Emulation	
Keyboard / Mouse	USB
Video	1920 x 1080 @ 60Hz; 1920 x 1200 @ 60Hz
LEDs	
KVM	2 (Green)
Power Consumption	DC5V: 0.72W
Environmental	
Operating Temperature	0 – 50°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Weight	0.48 kg (1.06 lb)
Dimensions (L x W x H)	8.24 x 6.65 x 2.52 cm (3.24 x 2.62 x 0.99 in.)
Carton Lot	10 pcs
Included Accessories	2 x Hotkey Stickers

Optional Accessory

Type	Part No. / Spec.	Page No.
USB Hub	UH275 / UH284	10-48

CS682

2-Port USB DVI/Audio Cable KVM Switch with Remote Port Selector

Our Top-of-the-Range DVI Cable KVM Switch + Video DynaSync™



Features

- One DVI console controls two USB DVI computers
- USB 2.0 mouse port can be used as a USB hub and for USB peripheral sharing¹
- **Video DynaSync™** – exclusive ATEN technology eliminates boot-up display problems and optimizes the resolution when switching among different sources
- Independent switching of the KVM and audio focus – KVM is focused on one computer while the audio is focused on the other
- Firmware upgradable
- Fully DVI-Digital specification compliant
- Audio-enabled – full bass response provides a rich experience for 2.1 channel surround sound systems
- Compact design, all-in-one cables (2 x 1.2 m) built-in
- Power on detection
- Supports multimedia keyboards and multifunction mice
- HDCP compliant
- Bus-powered – no external power adapter required

Note: 1. This may require an additional power adapter. To use the USB 2.0 mouse port as a USB hub, you must first disable mouse emulation mode.

6

Cable KVM Switches

Specifications

	CS682
Computer Connections	2
Connectors	
Console Ports	1 x DVI-D Female (White), 2 x USB Type A Female, 1 x 3.5mm Audio Jack Female (Green), 1 x 3.5mm Audio Jack Female (Pink)
KVM Ports	2 x DVI-D Male (Black), 2 x USB Type A Male (Purple), 2 x USB Type A Male (Black), 2 x 3.5mm Audio Jack Male (Green), 2 x 3.5mm Audio Jack Male (Pink)
Remote Port Selector	1 x 2.5mm Audio Jack Female
Port Selection	Hotkey, Mouse, Remote Port Selector
Cable Length	
Computer	2 x 1.2 m
Remote Port Selector	1.8 m
Emulation	
Keyboard / Mouse	USB
Video	1920 x 1200 @ 60Hz
LEDs	
Computer	2 (Green)
Remote Port Selector	2 (Green)
Power Consumption	DC5V: 1.95W
Environmental	
Operating Temperature	0 – 50°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Weight	0.49 kg (1.08 lb)
Dimensions (L x W x H)	11.15 x 7.80 x 2.40 cm (4.39 x 3.07 x 0.94 in.)
Carton Lot	10 pcs
Included Accessories	1x Remote Port Selector

CS22D

2-Port USB DVI Cable KVM Switch with Remote Port Selector

Simply Click to Select Computers



Features

- One DVI-D video console controls two USB DVI-D interface computers
- Remote port selector for convenient switch placement
- Mini-USB connector for optional external USB power
- The console USB ports can be used for USB peripheral sharing¹
- Compact design, all-in-one cables (2 x 1.2 m) built-in
- Supports USB hot-plugging
- Supports multifunction mice
- Bus-powered – no external power adapter required

Note: 1. The CS22D may require an external power supply via a micro USB port.

Specifications

	CS22D
Computer Connections	2
Connectors	
Console Ports	1 x DVI-D Female (White) 2 x USB Type A Female 1 x USB Mini Type B Female
KVM Ports	2 x DVI-D Male (Black) 2 x USB Type A Male
Port Selection	Remote Port Selector
Cable Length	
Computer	2 x 1.2 m
Remote Port Selector	1.8 m
Video Resolution	1920 x 1200 @ 60Hz
LEDs	
Selected	2 (Green)
Power Consumption	DC5V: 0.93W
Environmental	
Operating Temperature	0 – 50°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Weight	0.34 kg (0.75 lb)
Dimensions (L x W x H)	9.95 x 9.66 x 3.01 cm (3.92 x 3.8 x 1.19 in.)
Carton Lot	20 pcs

CS62U / CS62US

2-Port USB VGA/Audio Cable KVM Switch

Multiplatform USB Cable KVM Switch



Features

- One USB console controls two USB computers
- [Video DynaSync™](#) – exclusive ATEN technology the eliminates boot-up display problems and optimizes the resolution when switching among different sources
- Console mouse port emulation / bypass feature supports most mouse drivers
- Supports gaming and multimedia keyboards
- Supports multifunction and wireless keyboards and mice
- Compact design, built-in 1.8 m cables (CS62U), 0.9 m cables (CS62US)
- Selects OS via hotkey
- USB mouse port can be used as a USB 1.1 hub and for USB 1.1 peripheral sharing
- All-in-one design
- Auto Scan function to monitor computer operation
- Bus-powered – no external power adapter required

Specifications

	CS62U	CS62US
Computer Connections	2	
Connectors		
Console Ports	1 x HDB-15 Female (Blue) 2 x USB Type A Female 1 x 3.5mm Audio Jack Female (Green)	
KVM Ports	2 x HDB-15 Male (Blue) 2 x USB Type A Male (Black) 2 x 3.5mm Audio Jack Male (Green)	
Port Selection	Hotkey, Mouse	
Cable Length		
Computer	2 x 1.8 m	2 x 0.9 m
Emulation		
Keyboard / Mouse	USB	
Video	2048 x 1536; DDC2B	
LEDs		
Selected	2 (Green)	
Power Consumption	DC5V: 0.328W	DC5V: 0.33W
Environmental		
Operating Temperature	0 – 50°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Plastic	
Weight	0.37 kg (0.81 lb)	0.28 kg (0.62 lb)
Dimensions (L x W x H)	8.75 x 6.08 x 2.80 cm (3.44 x 2.39 x 1.1 in.)	
Carton Lot	20 pcs	

CS64U / CS64US

4-Port USB VGA/Audio Cable KVM Switch



Features

- One USB console controls four USB VGA computers
- Compact design, built-in 1.8 m cables (CS64U), 0.9 / 1.2 m cables (CS64US)
- [Video DynaSync™](#) – exclusive ATEN technology eliminates boot-up display problems and optimizes the resolution when switching among different sources
- Firmware upgradable
- USB mouse port can be used as a USB 1.1 hub and for USB 1.1 peripheral sharing
- Supports multimedia USB keyboards and multifunction mice
- Supports wireless keyboards and mice
- All-in-one design
- Auto Scan function to monitor computer operation
- Bus-powered – no external power adapter required

Specifications

	CS64U	CS64US
Computer Connections	4	
Connectors		
Console Ports	1 x HDB-15 Female (Blue) 2 x USB Type A Female 1 x 3.5mm Audio Jack Female (Green)	
KVM Ports	4 x HDB-15 Male (Blue) 4 x USB Type A Male 4 x 3.5mm Audio Jack Male (Green)	
Port Selection	Hotkey	
Cable Length		
Computer	4 x 1.8 m	2 x 0.9 m; 2 x 1.2 m
Emulation		
Keyboard / Mouse	USB	
Video	2048 x 1536; DDC2B	
LEDs		
Selected	4 (Green)	
Power Consumption	DC5V: 0.9W	
Environmental		
Operating Temperature	0 – 50°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Plastic	
Weight	0.73 kg (1.61 lb)	0.58 kg (1.28 lb)
Dimensions (L x W x H)	9.41 x 9.72 x 2.60 cm (3.7 x 3.83 x 1.02 in.)	
Carton Lot	5 pcs	
Included Accessories	N/A	2 x Hotkey Stickers

CS22U

2-Port USB VGA Cable KVM Switch with Remote Port Selector

Simply Click to Select Computers



Features

- One USB console controls two USB computers
- Remote port selector for convenient switch placement
- The console USB ports can be used for USB peripheral sharing
- Compact design, built-in 0.9 m cables
- Supports multifunction mice
- Bus-powered – no external power adapter required

Specifications

	CS22U
Computer Connections	2
Connectors	
Console Ports	1 x HDB-15 Female (Blue) 2 x USB Type A Female
KVM Ports	2 x HDB-15 Male (Blue) 4 x USB Type A Male (Black)
Port Selection	Remote Port Selector
Cable Length	
Computer	2 x 0.9 m
Remote Port Selector	1.8 m
Video	2048 x 1536; DDC2B
LEDs	
Selected	2
Power Consumption	DC5V: 0.14W
Environmental	
Operating Temperature	0 – 50°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Weight	0.30 kg (0.66 lb)
Dimensions (L x W x H)	8.24 x 7.01 x 2.46 cm (3.24 x 2.76 x 0.97 in.)
Carton Lot	20 pcs

CS52A

2-Port PS/2 USB VGA/Audio Cable KVM Switch with Remote Port Selector

Flexible Combinations: PS/2 Keyboard + USB Mouse



Features

- One console (monitor, PS/2 keyboard and USB mouse) controls two computers
- Remote port selector for convenient switch placement
- USB 2.0 mouse port can be used as a USB hub and for USB peripheral sharing
- Independent switching of the KVM and Audio focus – KVM is focused on one computer while the Audio is focused on the other
- Supports multifunction mice
- Compact design, all-in-one cables (console 0.15 m; computers 0.6 m, 1.2 m) built-in
- Audio (microphone and speaker) enabled – full bass response provides a rich experience for 2.1 surround sound systems
- Auto Scan function to monitor computer operation
- Bus-powered – no external power adapter required

Specifications

	CS52A
Computer Connections	2
Connectors	
Console Ports	1 x HDB-15 Female (Blue) 1 x 6-pin Mini-DIN Female (Purple) 1 x USB Type A Female 1 x 3.5mm Audio Jack Female (Green) 1 x 3.5mm Audio Jack Female (Pink)
KVM Ports	2 x HDB-15 Male (Blue) 2 x 6-pin Mini-DIN Male (Purple) 2 x USB Type A Male (Black) 2 x 3.5mm Audio Jack Male (Green) 2 x 3.5mm Audio Jack Male (Pink)
Remote Port Selector	1 x 2.5mm Audio Jack Female
Port Selection	Hotkey, Remote Port Selector
Cable Length	
Console	0.15 m
Computer	1 x 0.6 m; 1 x 1.2 m
Emulation	
Keyboard / Mouse	PS/2
Video	2048 x 1536; DDC2B
LEDs	
Selected	2 (Green)
Power Consumption	DC5V: 0.25W
Environmental	
Operating Temperature	0 – 50°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Weight	0.40 kg (0.88 lb)
Dimensions (L x W x H)	8.45 x 3.40 x 2.21 cm (3.33 x 1.34 x 0.87 in.)
Carton Lot	20 pcs
Included Accessories	1x Remote Port Selector

Optional Accessory

Type	Part No. / Spec.	Page No.
USB Hub	UH275 / UH284	10-48

CS62S

2-Port PS/2 VGA Cable KVM Switch



Features

- One PS/2 console controls two PS/2 computers
- Compact design, built-in 0.9 m cables
- Auto Scan function to monitor computer operation
- Bus-powered – no external power adapter required

Specifications

	CS62S
Computer Connections	2
Connectors	
Console Ports	1 x HDB-15 Female (Blue) 1 x 6-pin Mini-DIN Female (Purple) 1 x 6-pin Mini-DIN Female (Green)
KVM Ports	2 x HDB-15 Male (Blue) 2 x 6-pin Mini-DIN Male (Purple) 2 x 6-pin Mini-DIN Male (Green)
Port Selection	Hotkey
Cable Length	
Computer	2 x 0.9 m
Emulation	
Keyboard / Mouse	PS/2
Video	2048 x 1536; DDC2B
LEDs	
Selected	2 (Green)
Power Consumption	DC5V: 0.17W
Environmental	
Operating Temperature	0 – 50°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Weight	0.25 kg (0.55 lb)
Dimensions (L x W x H)	7.30 x 6.24 x 2.25 cm (2.87 x 2.46 x 0.89 in.)
Carton Lot	20 pcs

CS62A / CS64A

2/4-Port PS/2 VGA/Audio Cable KVM Switch

With Audio Support



• CS62A



• CS64A



Features

- One PS/2 console controls two/four PS/2 computers
- Compact design, built-in 1.2 m (CS62A), 1.8 m (CS64A) all-in-one cables
- Auto Scan function to monitor computer operation
- Bus-powered – no external power adapter required

Specifications

	CS62A	CS64A
Computer Connections	2	4
Connectors		
Console Ports	1 x HDB-15 Female (Blue) 1 x 6-pin Mini-DIN Female (Purple) 1 x 6-pin Mini-DIN Female (Green) 1 x 3.5mm Audio Jack Female (Green)	
KVM Ports	2 x HDB-15 Male (Blue) 2 x 6-pin Mini-DIN Male (Purple) 2 x 6-pin Mini-DIN Male (Green) 2 x 3.5mm Audio Jack Male (Green)	4 x HDB-15 Male (Blue) 4 x 6-pin Mini-DIN Male (Purple) 4 x 6-pin Mini-DIN Male (Green) 4 x 3.5mm Audio Jack Male (Green)
Port Selection	Hotkey	
Cable Length		
Computer	2 x 1.2 m	4 x 1.8 m
Emulation		
Keyboard / Mouse	PS/2	
Video	2048 x 1536; DDC2B	
LEDs		
Selected	2 x Green	4 x Green
Power Consumption	DC5V: 0.22W	DC5V: 0.41W
Environmental		
Operating Temperature	0 – 50°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Plastic	
Weight	0.30 kg (0.66 lb)	0.67 kg (1.48 lb)
Dimensions (L x W x H)	8.40 x 5.40 x 3.00 cm (3.31 x 2.13 x 1.18 in.)	7.86 x 7.86 x 3.06 cm (3.09 x 3.09 x 1.2 in.)
Carton Lot	20 pcs	5 pcs

Desktop KVM Switches

ATEN desktop KVM switches provide both ergonomic style and advanced functionality for the SOHO desktop environment. Desktop KVM switches allow you to switch and manage up to four PCs with various video types, such as USB-C, DisplayPort, HDMI, DVI, or VGA, and share USB peripherals and multi-channel audio functionality from one single-screen to three-screen console.



- **Boundless Switching**

ATEN Boundless Switching technology provides intuitive mouse cursor switching by moving your mouse across screen/window boundaries to switch between video sources.

- **Integrated USB Hub**

The KVMP Switch's design provides USB hub functionality – allowing USB peripherals to connect to the switch and be shared by all the computers on the installation.

- **Integrated High Definition Audio**

Featuring support for multi-channel digital audio formats – including Dolby True HD, DTS HD Master Audio, 2.1 and 7.1 Surround Sound – users can enjoy a true high-definition audio experience.

- **Dual Display – Dual View**

The Dual Display function is ideal for multimedia power users since it supports a separate output on each monitor. Users can have the display of the computer they are using on one monitor, while they keep an eye on the video output of the other computers on the second one, allowing the video output to seamlessly display on two monitors.

- **Up to 4K DCI Resolution with a Wide Range of Video Standards**

All ATEN desktop KVM solutions offer stunning video quality in a range of video standards, including USB-C, DisplayPort, HDMI, Dual Link DVI, and more, allowing you to keep pace with the boom in 4K DCI (4096 x 2160 @ 60Hz) video content across all sectors and take full advantage of the benefits of visual excellence in terms of both work efficiency and viewing pleasure.

- **Video DynaSync™**

Exclusive ATEN technology eliminates boot-up display problems and optimizes resolutions when switching among different sources.

- **Interface Flexibility**


For the convenience and flexibility of having both PS/2 and USB interface computers on the same installation, many ATEN KVM switches provide custom cables with both PS/2 and USB connectors.

- **Flexible Focus Assignment**

The KVM, audio and USB focus can all be assigned to one computer, or assigned independently. Assigning the focus independently means that users can give one computer the KVM console focus, another the USB hub focus, while a third has the audio focus.

Note:

The features highlighted above are not available in all products. Please refer to each product page for more details. Product information is subject to change without prior notice.

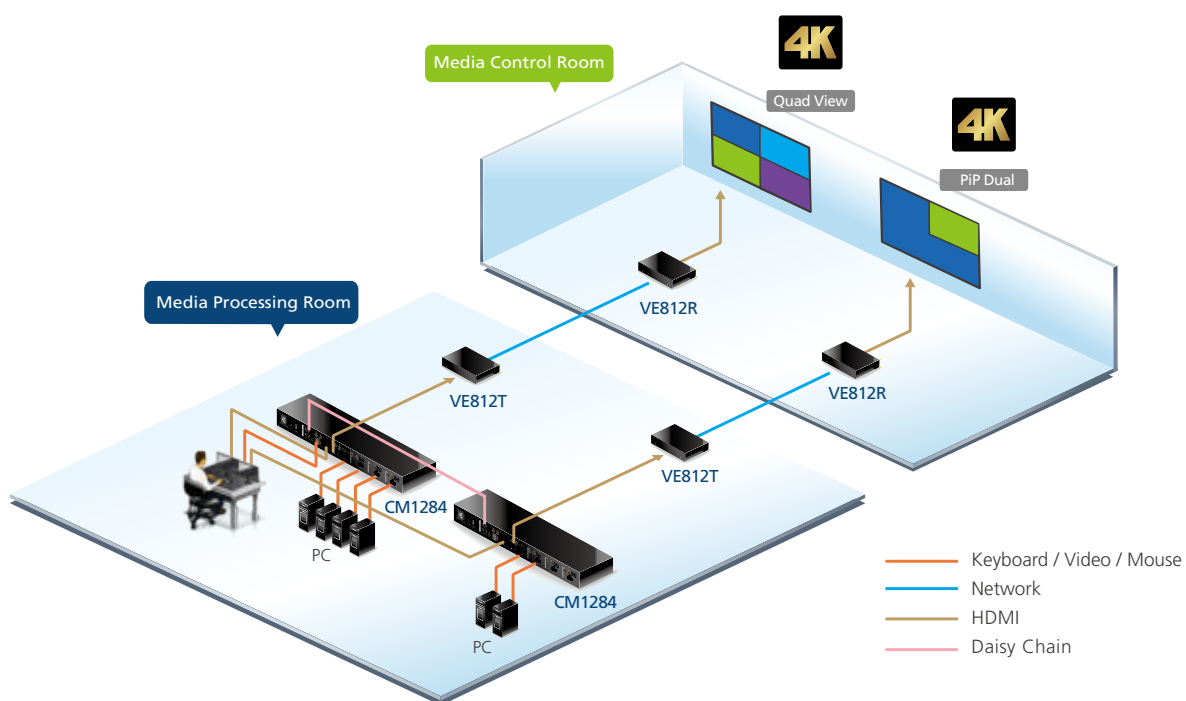

Feature Comparison

Model No.		CM1284	CM1164A	CS724KM	CS1953	CS1964	CS1944DP	CS1942DP
Ports		4	4	4	3	4	4	2
Interface	Keyboard, Mouse	USB	USB	USB	USB	USB	USB	USB
	Video	HDMI	DVI (Single Link)	N/A	DisplayPort/USB-C*	DisplayPort/HDMI**	DisplayPort	DisplayPort
Platform Support		Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun	Windows	Windows, Linux, Mac	Windows, Linux, Mac	Windows, Linux, Mac	Windows, Linux, Mac
USB Hub Built-in		•	•	•	• (USB 3.1 Gen 1)	• (USB 3.1 Gen 1)	• (USB 3.1 Gen 1)	• (USB 3.1 Gen 1)
Audio		•	•	• (Speaker)	• (Speaker)	•	•	•
Independent Switching		•	•	•	•	•	•	•
Video DynaSync™		•	•	N/A	N/A	•	N/A	N/A
Dual Display		•	N/A	N/A	N/A	• (Triple Display)	•	•
3D Support		N/A	N/A	N/A	N/A	N/A	•	•
Port Selection		Hotkey, Pushbutton, IR Remote Control, OSD, Mouse, RS-232 commands	Hotkey, Pushbutton, IR Remote Control, OSD, Mouse, RS-232 commands	Hotkey, Pushbutton, Mouse Wheel, Mouse Cursor, RS-232 commands	Hotkey, Pushbutton, Mouse, Remote Port Selector	Hotkey, Pushbutton, Mouse, RS-232 commands	Hotkey, Pushbutton, Mouse, RS-232 commands	Hotkey, Pushbutton, Mouse, RS-232 commands

Note: * USB-C transfers video, audio, and data.

** The HDMI port is located in the console section at the back of the switch.

Model No.		CS1924M	CS1922M	CS1924	CS1922	CS1914	CS1912	CS782DP
Ports		4	2	4	2	4	2	2
Interface	Keyboard, Mouse	USB	USB	USB	USB	USB	USB	USB
	Video	DisplayPort / HDMI**	DisplayPort / HDMI**	DisplayPort	DisplayPort	DisplayPort	DisplayPort	DisplayPort
Platform Support		Windows, Linux, Mac	Windows, Linux, Mac	Windows, Linux, Mac	Windows, Linux, Mac	Windows, Linux, Mac	Windows, Linux, Mac	Windows, Linux, Mac, Sun
USB Hub Built-in		• (USB 3.1 Gen 1)	• (USB 3.1 Gen 1)	• (USB 3.1 Gen 1)	• (USB 3.1 Gen 1)	• (USB 3.1 Gen 1)	• (USB 3.1 Gen 1)	N/A
Audio		•	•	•	•	• (Speaker)	• (Speaker)	• (Speaker)
Independent Switching		•	•	•	•	•	•	•
Video DynaSync™		N/A	N/A	N/A	N/A	N/A	N/A	N/A
Dual Display		•	•	N/A	N/A	N/A	N/A	N/A
3D Support		N/A	N/A	N/A	N/A	N/A	N/A	N/A
Port Selection		Hotkey, Pushbutton, Mouse, RS-232 commands	Hotkey, Pushbutton, Mouse, RS-232 commands	Hotkey, Pushbutton, Mouse	Hotkey, Pushbutton, Mouse	Hotkey, Pushbutton, Mouse	Hotkey, Pushbutton, Mouse	Hotkey, Mouse, Remote Port Selector

Model No.		CS1844	CS1842	CS1824	CS1822	CS1794	CS1792
Ports		4	2	4	2	4	2
Interface	Keyboard, Mouse	USB	USB	USB	USB	USB	USB
	Video	HDMI	HDMI	HDMI	HDMI	HDMI	HDMI
Platform Support		Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun	Windows, Linux, Mac	Windows, Linux, Mac	Windows, Linux, Mac	Windows, Linux, Mac
USB Hub Built-in		• (USB 3.1 Gen 1)	• (USB 3.1 Gen 1)	• (USB 3.1 Gen 1)	• (USB 3.1 Gen 1)	•	•
Audio		•	•	• (Speaker)	• (Speaker)	•	•
Independent Switching		•	•	•	•	•	•
Video DynaSync™		•	•	•	•	•	•
Dual Display		•	•	N/A	N/A	N/A	N/A
3D Support		N/A	N/A	N/A	N/A	N/A	N/A
Port Selection		Hotkey, Pushbutton, Mouse, RS-232 commands, Remote Port Selector	Hotkey, Pushbutton, Mouse, RS-232 commands, Remote Port Selector	Hotkey, Pushbutton, Mouse, RS-232 commands	Hotkey, Pushbutton, Mouse, RS-232 commands	Hotkey, Pushbutton	Hotkey, Pushbutton

Model No.		CS1644A	CS1642A	CS1784A	CS1782A	CS1764A	CS1762A
Ports		4	2	4	2	4	2
Interface	Keyboard, Mouse	USB	USB	USB	USB	USB	USB
	Video	DVI (Dual Link)	DVI (Dual Link)	DVI (Dual Link)	DVI (Dual Link)	DVI	DVI
Platform Support		Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun
USB Hub Built-in		•	•	•	•	•	•
Audio		•	•	•	• (7.1)	•	•
Independent Switching		•	•	•	•	•	•
Video DynaSync™		•	•	•	•	•	•
Dual Display		•	•	N/A	N/A	N/A	N/A
3D Support		•	•	•	•	N/A	N/A
Port Selection		Hotkey, Pushbutton, Mouse	Hotkey, Pushbutton, Mouse	Hotkey, Pushbutton, Mouse	Hotkey, Pushbutton, Mouse	Hotkey, Pushbutton, Mouse	Hotkey, Pushbutton, Mouse

Model No.		CS72D	CS1744	CS1742	CS1734B	CS1732B	CS1734A	CS1732A
Ports		2	4	2	4	2	4	2
Interface	Keyboard, Mouse	USB	USB	USB	PS/2, USB	PS/2, USB	PS/2, USB	PS/2, USB
	Video	DVI	VGA (SPHD)	VGA (SPHD)	VGA (SPHD)	VGA (SPHD)	VGA (SPHD)	VGA (SPHD)
Platform Support		Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun
USB Hub Built-in		N/A	•	•	•	•	•	•
Audio		•	•	•	•	•	•	•
Independent Switching		•	•	•	•	•	•	•
Video DynaSync™		•	N/A	N/A	•	•	N/A	N/A
Dual Display		N/A	•	•	N/A	N/A	N/A	N/A
3D Support		N/A	N/A	N/A	N/A	N/A	N/A	N/A
Port Selection		Hotkey, Pushbutton, Mouse	Hotkey, Pushbutton	Hotkey, Pushbutton	Hotkey, Pushbutton, OSD, Mouse	Hotkey, Pushbutton, OSD, Mouse	Hotkey, Pushbutton	Hotkey, Pushbutton

Model No.		CS84U	CS82U	CS74U	CS72U	CS84A	CS82A	CS74E
Ports		4	2	4	2	4	2	4
Interface	Keyboard, Mouse	PS/2, USB	PS/2, USB	USB	USB	PS/2	PS/2	PS/2
	Video	VGA (SPHD)	VGA (SPHD)	VGA (SPHD)	VGA (SPHD)	VGA	VGA	VGA (SPHD)
Platform Support		Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun	Windows, Linux, Mac, Sun	Windows, Linux	Windows, Linux	Windows, Linux
USB Hub Built-in		N/A	N/A	N/A	N/A	N/A	N/A	N/A
Audio		N/A	N/A	•	•	N/A	N/A	N/A
Independent Switching		N/A	N/A	N/A	N/A	N/A	N/A	N/A
Video DynaSync™		•	•	N/A	N/A	N/A	N/A	N/A
Dual Display		N/A	N/A	N/A	N/A	N/A	N/A	N/A
3D Support		N/A	N/A	N/A	N/A	N/A	N/A	N/A
Port Selection		Hotkey, Pushbutton, Mouse	Hotkey, Pushbutton, Mouse	Pushbutton	Pushbutton	Hotkey, Pushbutton	Hotkey, Pushbutton	Hotkey, Pushbutton

CM1284

4-Port USB 4K HDMI Multi-View KVM[™] Switch




Features

- Multi-view console controls up to four video sources on one screen with display modes including Quad View, Picture in Picture (PiP), Picture by Picture (PbP), and Picture on Picture (PoP)
- Features dual output on console side – a multi-view output and a full screen output
- Easily resizes and / or reposition any PiP or PbP to suit users' viewing needs
- System configuration via front panel pushbutton, OSD, IR Remote Control, and RS-232 commands – display mode and port selection
- Supports superior video quality – up to 4K (4096 x 2160 @ 30 Hz); YCbCr 4:2:2
- Drop down menu – edits display windows and other functions with the mouse and on-screen control panel
- Computer selection via front panel pushbutton, hotkey, mouse¹, and the serial commands
- **Boundless Switching** – simply moves the mouse cursor across windows to switch to other video sources even among the daisy chained installation
- Boundless Switching Focus – a window frame to indicate which computer that it currently has the focus
- **Video DynaSync[™]** – exclusive ATEN technology eliminates boot-up display problems and optimizes the resolution when switching among different sources
- **EDID Expert[™]** – selects optimum EDID settings for smooth power-up, high-quality display and use of the best video resolution across different screens
- DCC (Daisy Chain Control) – controls up to 3 additional CM1284 units from a single console
- Cascade up to 2 levels – controls up to 16 computers (with up to 4 x 4 Multi-view mode)
- HDCP 1.4 compliant
- Console keyboard emulation / bypass feature
- Console mouse port emulation / bypass feature
- Independent switching for USB peripheral port, audio function and KVM switch focus
- Firmware upgradable via computer's USB port

Note: 1. Mouse port switching is only workable under mouse emulation mode and is for 3-key USB wheel mouse only.


Setup > CM1284

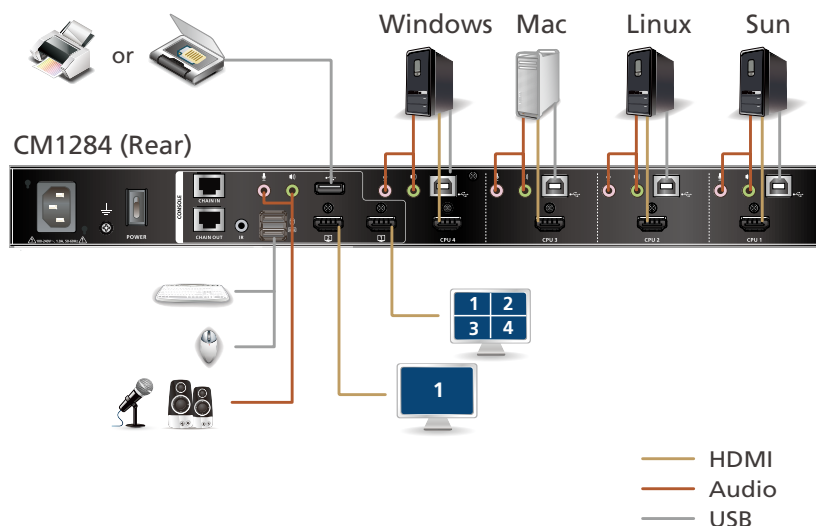


- **Quad View** displays all four computers / video sources on the display




- **PiP Dual** – shows two computers / video sources, with only half of the actual display visible



- **PiP Triple** – shows three computers / video sources at one time



- **PiP Quad** – shows four computers / video sources at one time, but unlike in Quad View, one display takes up the whole screen, while the other three displays are occupying only the right side of the screen



Note: The screen size of the each display depends on the resolution of the computer / video source connected to the port.

Specifications

CM1284	
Computer Connections	4
Port Selection	Pushbutton, Hotkey, IR Remote Control, On-Screen Display (OSD), Mouse Wheel, Mouse Cursor, RS-232 Commands
Connectors	
Console Ports	2 x USB Type A Female 2 x HDMI Female (Black) 2 x 3.5mm Audio Jack Female (Green; 1 x front, 1 x rear) 2 x 3.5mm Audio Jack Female (Pink; 1 x front, 1 x rear) 2 x RJ-45
KVM (Computer) Ports	4 x USB Type B Female (White) 4 x HDMI Female (Black) 4 x 3.5mm Audio Jack Female (Green) 4 x 3.5mm Audio Jack Female (Pink)
Power	1 x IEC320 Jack
USB Hub	2 x USB 2.0 Type A Female (1 x front, 1 x rear)
Switches	
Selected	11 x Pushbuttons
Emulation	
Keyboard / Mouse	USB
Video	4096 x 2160 @ 30Hz
LEDs	
KVM	4 (Orange)
Audio	4 (Green)
USB	4 (Green)
Maximum Input Power Rating	100-240V AC; 50-60Hz; 1A
Power Consumption	AC110V: 16.0W / AC220V: 14.8W
Environmental	
Operating Temperature	0 – 40°C
Storage Temperature	-10 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Metal
Weight	2.46 kg (5.42 lb)
Dimensions (L x W x H)	43.72 x 16.40 x 4.40 cm (17.21 x 6.46 x 1.73 in.)
Carton Lot	3 pcs
Included Accessories	4x USB HDMI KVM Cables; 1x Power Cord; 1x IR Remote Control; 1x Rack Mount Kit

Optional Accessories

Type	Part No. / Spec.	Page No.
USB HDMI KVM Cables	2L-7D02UH (1.8 m)	12-3
IR Extender Cable	2XRT-0003G	12-4

CM1164A

4-Port USB DVI Multi-View KVM[™] Switch



Front




Rear


Features

- Multi-view console controls up to four video sources on one screen with display modes including Quad View, Picture in Picture (PiP), Picture by Picture (PbP), and Picture on Picture (PoP)
- System configuration via front panel pushbutton, OSD, IR Remote Control, and RS-232 commands – display mode and port selection
- Supports superior video quality – up to 1920 x 1200; YCbCr 4:2:2
- Easily resize and / or reposition any PiP or PbP to suit users' viewing needs
- DCC (Daisy Chain Control) – controls up to 3 additional CM1164A units from a single console
- Cascade up to 2 levels – controls up to 16 computers (with up to 4 x 4 Multi-view mode)
- **Boundless Switching** – simply moves the mouse cursor across windows to switch to other video sources even among the daisy chained installation
- Boundless Switching Focus – a window frame to indicate which computer that it currently has the focus
- **Video DynaSync[™]** – exclusive ATEN technology eliminates boot-up display problems and optimizes the resolution when switching among different sources
- HDCP 1.4 compliant
- Supports RS-232 commands
- Drop down menu – edits display windows and other functions with the mouse and on-screen control panel
- Console mouse port emulation / bypass feature that supports most mouse drivers and multifunction mice
- Console keyboard emulation / bypass feature that supports most multimedia keyboards
- Independent switching for USB peripheral port, audio function and KVM switch focus
- Auto Scan feature
- Power on detection
- Full bass response provides a rich experience for 2.1 channel audio


Setup > CM1164A

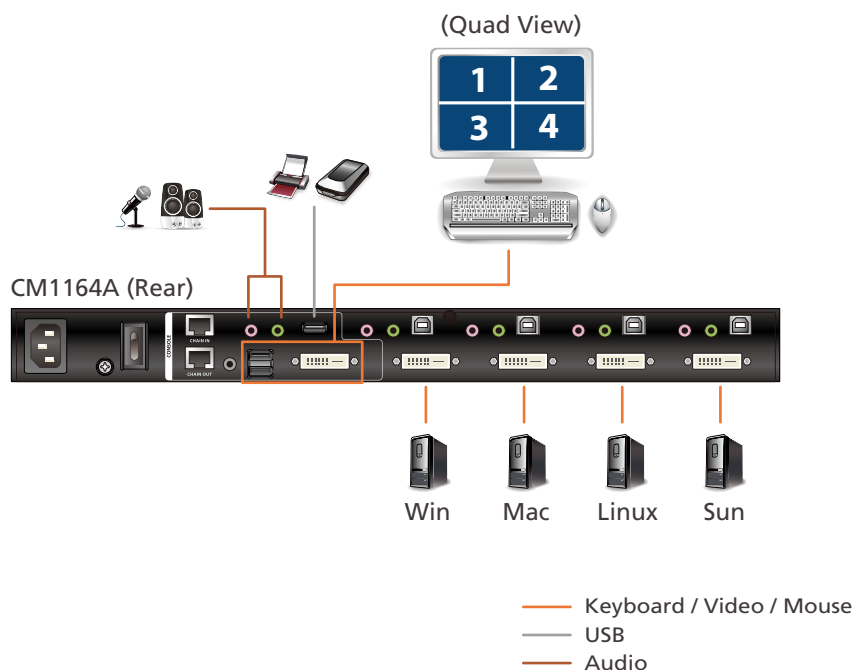


- **Quad View** displays all four computers / video sources on the display




- **PiP Dual** – shows two computers / video sources, with only half of the actual display visible



- **PiP Triple** – shows three computers / video sources at one time



- **PiP Quad** – shows four computers / video sources at one time, but unlike in Quad View, one display takes up the whole screen, while the other three displays are occupying only the right side of the screen



Note: The screen size of the each display depends on the resolution of the computer / video source connected to the port.

Specifications

	CM1164A
Computer Connections	4
Port Selection	Pushbutton, Hotkey, IR Remote Control, On-Screen Display (OSD), Mouse Wheel, Mouse Cursor, RS-232 Commands
Connectors	
Console Ports	2 x USB Type A Female 1 x Single Link DVI-D Female (White) 2 x 3.5mm Audio Jack Female (Green; 1 x front, 1 x rear) 2 x 3.5mm Audio Jack Female (Pink; 1 x front, 1 x rear) 2 x RJ-45
KVM Ports	4 x USB Type B Female 4 x Single Link DVI-D Female (White) 4 x 3.5mm Audio Jack Female (Green) 4 x 3.5mm Audio Jack Female (Pink)
Power	1 x IEC320 Jack
USB Hub	2 x USB 2.0 Type A Female
Emulation	
Keyboard / Mouse	USB
Switches	
Selected	11 x Pushbuttons
Video	1920 x 1200 @ 60Hz (DVI-D)
LEDs	
KVM	4 (Orange)
Audio	4 (Green)
USB	4 (Green)
Power Consumption	AC110V: 9.7W / AC220V: 9.5W
Environmental	
Operating Temperature	0 – 40°C
Storage Temperature	-10 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Metal
Weight	2.46 kg (5.42 lb)
Dimensions (L x W x H)	43.72 x 16.40 x 4.40 cm (17.21 x 6.46 x 1.73 in.)
Carton Lot	3 pcs
Included Accessories	4x KVM Cables (DVI-D, USB, Audio); 1x Power Cord; 1x IR Remote Control; 1x Rack Mount Kit

Optional Accessories

Type	Part No. / Spec.	Page No.
USB DVI Single Link KVM Cables	2L-7D02U (1.8 m), 2L-7D03U (3 m), 2L-7D05U (5 m)	12-3
IR Extender Cable	2XRT-0003G	12-4

CS724KM

4-Port USB Boundless KM Switch



Front



Rear



Features



- Single USB keyboard and mouse control up to 4 computers
- **Boundless Switching** - allows users to switch between computers when the mouse cursor crosses the display border
- **Extended Desktops Boundless Switching up to 16 monitors¹**
- Daisy-Chain two units to control 8 computers with a single keyboard and mouse
- Independently switch KM, USB peripheral and audio port focus via hotkeys
- Computer selection via pushbutton, hotkey, mouse cursor, mouse wheel² and RS-232 commands
- Supports RS-232 serial commands
- Supports Windows and Linux
- No software required¹
- Bus-powered – no external power adapter required³

Note: 1. For extended desktops boundless switching, it is required to upgrade the CS724KM firmware, the Boundless Switching Configuration Utility, and the Driver AP software.
2. Mouse port switching is only supported under mouse emulation mode and by USB 3-key wheel mice.
3. If power supply from the connected computers is insufficient, the device may need to connect to an external power adapter.

Specifications

	CS724KM
Computer Connections	4
Port Selection	Hotkey, Pushbutton, Mouse Wheel, Mouse Cursor, RS-232 Commands
Connectors	
Console Ports	2 x USB Type A Female 2 x 3.5mm Audio Jack Female (Green; 1 x front, 1 x rear) 1 x RJ-45
KVM (Computer) Ports	4 x USB Type B Female 4 x 3.5mm Audio Jack Female (Green)
Power	1 x DC Jack
USB Hub	2 x USB 2.0 Type A Female (1 x front, 1 x rear)
LEDs	
Selected	4 (Green)
Emulation	
Keyboard / Mouse	USB
Power Consumption	DC5V: 1.69W
Environmental	
Operating Temperature	0 – 50°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Metal + Plastic
Weight	0.50 kg (1.1 lb)
Dimensions (L x W x H)	20.00 x 8.06 x 2.50 cm (7.87 x 3.17 x 0.98 in.)
Carton Lot	5 pcs
Included Accessories	4x USB Cables; 4x Audio Cables

Setup > CS724KM

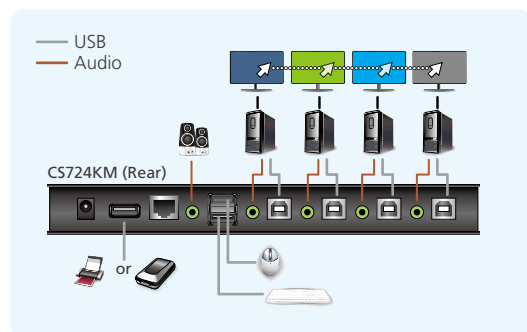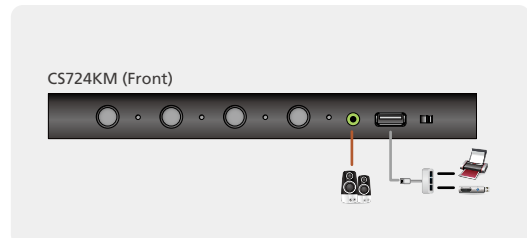

CS1953

3-Port USB-C DisplayPort Hybrid KVM[™] Switch



Features

- One USB keyboard, mouse and one DisplayPort monitor control two DisplayPort computers, one USB-C device and share two USB peripherals
- Fully compliant with USB-C specification – transfers video, audio, and data via one USB channel
- Provides USB Power Delivery 3.0 for USB-C device charging up to 45W¹
- Supports superior video quality – up to 4K DCI (4096 x 2160 @ 60Hz)
- Build-in 2-port USB 3.1 Gen 1 hub with SuperSpeed 5 Gbps data transfer rates
- Supports DisplayPort Alternate Mode (DP Alt Mode) which enables the USB connection to carry DisplayPort signals
- Computer selection via front panel pushbuttons, hotkeys, mouse², and remote port selector
- DisplayPort 1.2 compliant; HDCP 1.4 compliant
- Supports HD Audio³
- Firmware upgradable; Bus-Powered

Note: 1. The power adapter is needed with the CS1953 for USB-C device charging to work.
 2. Mouse port switching is only supported under mouse emulation mode and by USB 3-key wheel mice.
 3. HD audio through DisplayPort cannot be switched independently.

Specifications

	CS1953
Computer Connections	3
Port Selection	Hotkey, Pushbutton, Mouse, Remote Port Selector
Connectors	
Console Ports	2 x USB Type A Female; 1 x DisplayPort Female (Black); 2 x 3.5mm Audio Jack Female (Green; 1 x front, 1 x rear)
KVM (Computer) Ports	CPU1 and CPU2: 2 x USB 3.1 Gen 1 Type B Female (Blue) 2 x DisplayPort Female (Black) 2 x 3.5mm Audio Jack Female (Green) CPU3: 1 x USB Type-C Female (Black) 1 x 3.5mm Audio Jack Female (Green)
Remote Port Selector	1 x 2.5mm Audio Jack Female (Black)
Power	1 x DC Jack
USB Hub	2 x USB 3.1 Gen 1 Type A Female (Blue; 1 x front, 1 x rear)
LEDs	
KVM	3 (Orange)
Audio	3 (Green)
USB	3 (Green)
Emulation	
Keyboard / Mouse	USB
Power Consumption	DC12V: 5.78W
Video	4096 x 2160 @ 60Hz
Environmental	
Operating Temperature	0 – 40°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Metal + Plastic
Weight	0.50 kg (1.1 lb)
Dimensions (L x W x H)	20.63 x 7.54 x 4.40 cm (8.12 x 2.97 x 1.73 in.)
Carton Lot	5 pcs
Included Accessories	1x USB Type-C Cable; 3x Audio Cables; 2x DisplayPort 1.2 Cables; 2x USB 3.0 Cables; 1x Remote Port Selector

CS1964

4-Port USB 3.0 4K DisplayPort Triple Display KVM[™] Switch



Features

- One USB keyboard / mouse and three HDMI monitors control four DisplayPort computers
- **Video DynaSync[™]** – exclusive ATEN technology that optimizes display resolution, speeds up switching between systems, and ensures that windows opened on an extended desktop will not revert to their default configurations on the main display when switching between ports
- **Supports Six Display by connecting two Triple Display KVM switches**
- Supports superior video quality – up to 4K DCI (4096 x 2160 @ 60Hz)
- Built-in 2-port USB 3.1 Gen 1 hub with SuperSpeed 5 Gbps data transfer rates
- Computer selection via front panel pushbuttons, hotkeys, mouse¹, and RS-232 commands²
- DisplayPort 1.2 compliant; HDMI compliant; HDCP 2.2 compliant
- Independent switching of KVM, USB peripheral, and audio focus
- Firmware upgradable
- Supports N-key Rollover³ (NKRO) – permits collision-free keying, a great advantage for gaming

Note: 1. Mouse port switching is only supported under mouse emulation mode and by USB 3-key wheel mice.
2. Slide the DCC switch to the s position to allow the KVM switch to receive RS-232 commands via an RJ-45-to-DB9 cable.
3. N-key Rollover supports up to 15 simultaneous keystrokes.


Specifications

	CS1964
Computer Connections	4
Port Selection	Hotkey, Pushbutton, Mouse, RS-232 Commands
Connectors	
Console Ports	2 x USB Type A Female 3 x HDMI Female (Black) 2 x 3.5mm Audio Jack Female (Green; 1 x front, 1 x rear) 2 x 3.5mm Audio Jack Female (Pink; 1 x front, 1 x rear)
KVM (Computer) Ports	4 x USB 3.1 Gen 1 Type B Female (Blue) 12 x DisplayPort Female (Black) 4 x 3.5mm Audio Jack Female (Green) 4 x 3.5mm Audio Jack Female (Pink)
Daisy Chain Ports	1 x RJ-45 Female
Power	1 x DC Jack
USB Hub	2 x USB 3.1 Gen 1 Type A Female (Blue; 1 x front, 1 x rear)
Emulation	
Keyboard / Mouse	USB
Video	4096 x 2160 @ 60Hz
Power Consumption	DC 12V: 15.49W
Environmental	
Operating Temperature	0 – 50°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Metal
Weight	1.93 kg (4.25 lb)
Dimensions (L x W x H)	33.50 x 15.60 x 6.55 cm (13.19 x 6.14 x 2.58 in.)
Carton Lot	3 pcs
Included Accessories	6x DisplayPort 1.2 Cables; 2x USB 3.0 Cables; 4x Audio Cables; 1x Power Adapter

Note: The included cable sets are for two computer port connection only.
Optional cable sets (2L-7D02UDPX6) are available with a separate purchase for the remaining computer port connection.

CS1942DP / CS1944DP

2/4-Port USB 3.0 4K DisplayPort Dual Display KVM™ Switch



Front

- CS1942DP



- CS1944DP



Rear

- CS1942DP



- CS1944DP



Features

- One USB keyboard and mouse control two/four DisplayPort computers and share two USB peripherals
- Supports Quad Display by connecting two Dual Display KVM switches
- Supports superior video quality – up to 4K (4096 x 2160 / 3840 x 2160 @ 60Hz)
- Computer Selection via front panel pushbuttons, hotkeys, mouse, and RS-232 commands
- Built-in 2-port USB 3.1 Gen 1 hub with SuperSpeed 5 Gbps data transfer rates
- Supports DisplayPort Dual-Mode technology (DP++)¹
- Supports Console keyboard emulation/bypass feature
- Supports Console mouse emulation/bypass feature
- Independent switching of KVM, USB peripheral, and audio focus
- Multilingual keyboard mapping – supports English, French, Japanese, and German keyboards
- DisplayPort 1.2 compliant; HDCP compliant
- Supports HD audio²
- Power on detection
- Firmware upgradable

Note: 1. DisplayPort Dual – Mode technology (DP++) does not require an active adapter for most single display setups. Active DisplayPort adapters are recommended if you are unsure of the video source's DP++ compatibility.
2. HD audio through DisplayPort cannot be switched independently.

Specifications

	CS1942DP	CS1944DP
Computer Connections	2	4
Port Selection	Hotkey, Pushbutton, Mouse, RS-232 Commands	
Connectors		
Console Ports	2 x USB Type A Female 2 x DisplayPort Female (Black) 2 x 3.5mm Audio Jack Female (Green; 1 x front, 1 x rear) 2 x 3.5mm Audio Jack Female (Pink; 1 x front, 1 x rear)	
KVM (Computer) Ports	2 x USB 3.1 Gen 1 Type B Female (Blue) 4 x DisplayPort Female (Black) 2 x 3.5mm Audio Jack Female (Green) 2 x 3.5mm Audio Jack Female (Pink)	4 x USB 3.1 Gen 1 Type B Female (Blue) 8 x DisplayPort Female (Black) 4 x 3.5mm Audio Jack Female (Green) 4 x 3.5mm Audio Jack Female (Pink)
Daisy Chain Ports	1 x RJ-45 Female	
Power	1 x DC Jack	
USB Hub	2 x USB 3.1 Gen 1 Type A Female (Blue; 1 x front, 1 x rear)	
Emulation		
Keyboard / Mouse	USB	
Video	4096 x 2160 @ 60Hz	
Power Consumption	DC 12V: 3.48W	DC 12V: 6.125W
Environmental		
Operating Temperature	0 – 50°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal	
Weight	1.54 kg (3.39 lb)	1.51 kg (3.33 lb)
Dimensions (L x W x H)	33.50 x 15.66 x 4.40 cm (13.19 x 6.17 x 1.73 in.)	
Carton Lot	3 pcs	
Included Accessories	4x DisplayPort 1.2 Cables; 2x USB 3.0 Cables; 4x Audio Cables; 1x Power Adapter	8x DisplayPort 1.2 Cables; 4x USB 3.0 Cables; 8x Audio Cables; 1x Power Adapter


Optional Accessories

Type	Part No. / Spec.
DisplayPort to VGA Adapter*	VC925
DisplayPort to DVI Adapter*	VC965
DisplayPort to HDMI Adapter*	VC985
DisplayPort to 4K HDMI Active Adapter*	VC986

Note: * For more information about the VC925, VC965, VC985, and VC986, please refer to the VanCryst product catalog.

CS1922M / CS1924M

2/4-Port USB 3.0 4K DisplayPort MST KVM[™] Switch

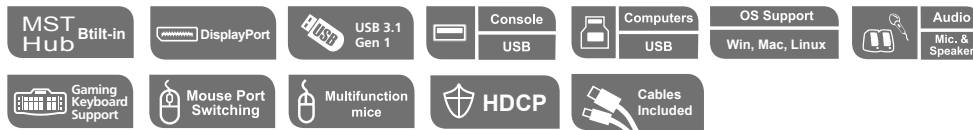

Front

- CS1922M



- CS1924M



Rear

- CS1922M



- CS1924M



Features

- One USB keyboard/mouse and DisplayPort or HDMI monitor control 2/4 computers and share 2 USB peripherals
- Built-in Multi-Stream Transport (MST) hub allows dual displays (DisplayPort / HDMI) from a single DisplayPort source¹
- Supports MST Mode, Splitter Mode, and Single Port Mode
- Built-in 2-port USB 3.1 Gen 1 hub with SuperSpeed 5 Gbps data transfer rates
- DisplayPort Dual-Mode (DP++) technology supports HDMI and DVI signals via a DisplayPort-to-HDMI/DVI DP++ adapter²
- Superior video quality – 4K UHD (3840 x 2160 @ 60Hz) and 4K DCI (4096 x 2160 @ 60Hz)
- DisplayPort 1.2 compliant, HDCP 1.3 compliant
- Supports HD audio through DisplayPort³
- Computer selection via front panel pushbuttons, hotkeys, mouse⁴, and RS-232 commands
- Independent switching of KVM, USB peripheral, and audio focus
- Power On Detection
- Firmware upgradable

Note: 1. The PC source must be DisplayPort 1.2 compliant.
 2. DisplayPort Dual-Mode technology (DP++) does not require an active adapter for most single display setups. Active DisplayPort adapters are recommended if you are unsure of the video source's DP++ compatibility.
 3. HD audio through DisplayPort cannot be switched independently.
 4. Mouse port switching is only supported under mouse emulation mode with a USB 3-button mouse wheel.

Specifications

	CS1922M	CS1924M
Computer Connections	2	4
Port Selection	Hotkey, Pushbutton, Mouse, RS-232 Commands	
Connectors		
Console Ports	2 x USB Type A Female 1 x DisplayPort Female (Black) 1 x HDMI Female (Black) 2 x 3.5mm Audio Jack Female (Green; 1 x front, 1 x rear) 2 x 3.5mm Audio Jack Female (Pink; 1 x front, 1 x rear) 1 x RJ-11 Female	
KVM (Computer) Ports	2 x USB 3.1 Gen 1 Type B Female (Blue) 2 x DisplayPort Female (Black) 2 x 3.5mm Audio Jack Female (Green) 2 x 3.5mm Audio Jack Female (Pink)	4 x USB 3.1 Gen 1 Type B Female (Blue) 4 x DisplayPort Female (Black) 4 x 3.5mm Audio Jack Female (Green) 4 x 3.5mm Audio Jack Female (Pink)
Power	1 x DC Jack	
USB Hub	2 x USB 3.1 Gen 1 Type A Female (Blue; 1 x front, 1 x rear)	
Emulation		
Keyboard / Mouse	USB	
Video	4096 x 2160 @ 60Hz	
Power Consumption	DC5V: 4.09W	DC5V: 4.89W
Environmental		
Operating Temperature	0 – 50°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal + Plastic	
Weight	0.73 kg (1.61 lb)	0.92 kg (2.03 lb)
Dimensions (L x W x H)	21.00 x 8.80 x 5.55 cm (8.27 x 3.46 x 2.19 in.)	27.00 x 8.80 x 5.55 cm (10.63 x 3.46 x 2.19 in.)
Carton Lot	5 pcs	
Included Accessories	2x DisplayPort 1.2 Cables; 2x USB 3.0 Cables; 4x Audio Cables; 1x Power Adapter	4x DisplayPort 1.2 Cables; 4x USB 3.0 Cables; 8x Audio Cables; 1x Power Adapter

Optional Accessories

Type	Part No. / Spec.
DisplayPort to VGA Adapter*	VC925
DisplayPort to DVI Adapter*	VC965
DisplayPort to HDMI Adapter*	VC985
DisplayPort to 4K HDMI Active Adapter*	VC986

Note: * For more information about the VC925, VC965, VC985, and VC986, please refer to the VanCryst product catalog.

CS1922 / CS1924

2/4-Port USB 3.0 4K DisplayPort KVM™ Switch



Front

- CS1922



- CS1924



Rear

- CS1922



- CS1924



Features

- 2/4-port DisplayPort KVM Switch with USB 3.1 Gen 1 hub and 2.1 surround sound audio
- One USB console controls two/four computers and two USB peripherals
- Computer selection via front panel pushbuttons, hotkeys and mouse¹
- Superior video quality – 4K UHD (3840 x 2160 @ 60Hz) and 4K DCI (4096 x 2160 @ 60Hz)
- Built-in 2-port USB 3.1 Gen 1 hub with SuperSpeed 5 Gbps data transfer rates
- DisplayPort 1.2 compliant; HDCP compliant
- Supports HD audio through DisplayPort²
- Independent switching of KVM, USB peripheral, and audio focus
- Power On Detection
- Supports Multi-Stream Transport (MST) allows multiple monitors through a single DisplayPort connector
- DisplayPort Dual-Mode technology (DP++) supports HDMI and DVI signals via a DisplayPort-to-HDMI/DVI DP++ adapter³
- Firmware upgradable

Note: 1. Mouse port switching is only supported under mouse emulation mode with a USB 3-button mouse wheel.

2. HD audio through DisplayPort cannot be switched independently.

3. DisplayPort Dual-Mode technology (DP++) does not require an active adapter for most single display setups. Active DisplayPort adapters are recommended if you are unsure of the video source's DP++ compatibility.

Specifications

	CS1922	CS1924
Computer Connections	2	4
Port Selection	Hotkey, Pushbutton, Mouse	
Connectors		
Console Ports	2 x USB Type A Female (Black) 1 x DisplayPort Female (Black) 2 x 3.5mm Audio Jack Female (Green; 1 x front, 1 x rear) 2 x 3.5mm Audio Jack Female (Pink; 1 x front, 1 x rear)	
KVM (Computer) Ports	2 x USB 3.1 Gen 1 Type B Female (Blue) 2 x DisplayPort Female (Black) 2 x 3.5mm Audio Jack Female (Green) 2 x 3.5mm Audio Jack Female (Pink)	4 x USB 3.1 Gen 1 Type B Female (Blue) 4 x DisplayPort Female (Black) 4 x 3.5mm Audio Jack Female (Green) 4 x 3.5mm Audio Jack Female (Pink)
Power	1 x DC Jack	
USB Hub	2 x USB 3.1 Gen 1 Type A Female (Blue; 1 x front, 1 x rear)	
Emulation		
Keyboard / Mouse	USB	
Video	4096 x 2160 @ 60Hz	
Power Consumption	DC5V: 2.00W	DC5V: 2.99W
Environmental		
Operating Temperature	0 – 50°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal + Plastic	
Weight	0.73 kg (1.61 lb)	0.91 kg (2 lb)
Dimensions (L x W x H)	21.00 x 8.80 x 5.55 cm (8.27 x 3.46 x 2.19 in.)	27.00 x 8.80 x 5.55 cm (10.63 x 3.46 x 2.19 in.)
Carton Lot	5 pcs	
Included Accessories	2x DisplayPort 1.2 Cables; 2x USB 3.0 Cables; 4x Audio Cables; 1x Power Adapter	4x DisplayPort 1.2 Cables; 4x USB 3.0 Cables; 8x Audio Cables; 1x Power Adapter

Optional Accessories

Type	Part No. / Spec.
DisplayPort to VGA Adapter*	VC925
DisplayPort to DVI Adapter*	VC965
DisplayPort to HDMI Adapter*	VC985
DisplayPort to 4K HDMI Active Adapter*	VC986

Note: * For more information about the VC925, VC965, VC985, and VC986, please refer to the VanCryst product catalog.

CS1912 / CS1914

2/4-Port USB 3.0 DisplayPort KVM™ Switch



Front

• CS1912



• CS1914



Rear

• CS1912



• CS1914



Features

- One USB console controls two/four computers and two USB peripherals
- Computer selection via front panel pushbuttons, hotkeys and mouse¹
- Superior video quality – up to 4K (3840 x 2160 @ 30Hz)
- Built-in 2-port USB 3.1 Gen 1 hub with SuperSpeed 5 Gbps data transfer rates
- DisplayPort 1.1 compliant; HDCP compliant
- Supports HD audio through DisplayPort²
- Full bass response for high-quality 2.1 channel surround sound systems
- Power On Detection
- DisplayPort Dual-Mode technology (DP++) supports HDMI and DVI signals via a DisplayPort-to-HDMI/DVI DP++ adapter³
- Mouse emulation/bypass feature supports most mouse drivers and multifunction mice
- Keyboard emulation/bypass feature supports most gaming keyboards

Note: 1. Mouse port switching is only supported under mouse emulation mode with a USB 3-button mouse wheel.
2. HD audio through DisplayPort cannot be switched independently.
3. DisplayPort Dual-Mode technology (DP++) does not require an active adapter for most single display setups. Active DisplayPort adapters are recommended if you are unsure of the video source's DP++ compatibility.

Specifications

	CS1912	CS1914
Computer Connections	2	4
Port Selection	Hotkey, Pushbutton, Mouse	
Connectors		
Console Ports	2 x USB Type A Female (Black) 1 x DisplayPort Female (Black) 2 x 3.5mm Audio Jack Female (Green; 1 x front, 1 x rear)	
KVM (Computer) Ports	2 x USB 3.1 Gen 1 Type B Female (Blue) 2 x DisplayPort Female (Black) 2 x 3.5mm Audio Jack Female (Green)	4 x USB 3.1 Gen 1 Type B Female (Blue) 4 x DisplayPort Female (Black) 4 x 3.5mm Audio Jack Female (Green)
Power	1 x DC Jack	
USB Hub	2 x USB 3.1 Gen 1 Type A Female (Blue; 1 x front, 1 x rear)	
Emulation		
Keyboard / Mouse	USB	
Video	3840 x 2160 @ 30Hz	
Power Consumption	DC5V: 2.00W	DC5V: 2.99W
Environmental		
Operating Temperature	0 – 50°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal + Plastic	
Weight	0.73 kg (1.61 lb)	0.91 kg (2 lb)
Dimensions (L x W x H)	21.00 x 8.80 x 5.55 cm (8.27 x 3.46 x 2.19 in.)	27.00 x 8.80 x 5.55 cm (10.63 x 3.46 x 2.19 in.)
Carton Lot	5 pcs	5 pcs
Included Accessories	2x DisplayPort Cables; 2x USB 3.0 Cables; 2x Audio Cables; 1x Power Adapter	4x DisplayPort Cables; 4x USB 3.0 Cables; 4x Audio Cables; 1x Power Adapter

Optional Accessories

Type	Part No. / Spec.
DisplayPort to VGA Adapter*	VC925
DisplayPort to DVI Adapter*	VC965
DisplayPort to HDMI Adapter*	VC985
DisplayPort to 4K HDMI Active Adapter*	VC986

Note: * For more information about the VC925, VC965, VC985, and VC986, please refer to the VanCryst product catalog.

CS782DP

2-Port USB DisplayPort/Audio KVM Switch (4K Supported)



Features

- One DisplayPort video console controls two USB computers
- Supports superior video quality – 4K UHD (3840 x 2160 @ 60Hz) and 4K DCI (4096 x 2160 @ 60Hz)
- Computer selection via remote port selector, hotkeys, and USB mouse¹
- Supports MST (Multi-Stream Transport), enabling multiple monitors to be used via a single DisplayPort connector
- DisplayPort 1.2 compliant; HDCP compliant
- Supports HD Audio² through DisplayPort playback
- Console mouse port emulation / bypass feature supports most mouse drivers and multifunction mice
- USB 2.0 mouse port can be used for USB hub and USB peripheral sharing³
- Bus powered – no external power adapter required


Note: 1. Mouse port switching is only supported under mouse emulation mode and by USB 3-key wheel mice.
 2. HD audio through DisplayPort interface cannot be switched independently.
 3. This feature may require an extra power adapter to be connected to the USB hub and the CS782DP's Mouse Emulation Mode should be disabled.

Specifications

	CS782DP
Computer Connections	2
Port Selection	Hotkey, Mouse, Remote Port Selector
Connectors	
Console Ports	2 x USB Type A Female 1 x DisplayPort Female (Black) 1 x 3.5mm Audio Jack Female (Green)
KVM (Computer) Ports	2 x USB Type B Female 2 x DisplayPort Female (Black) 2 x 3.5mm Audio Jack Female (Green)
Remote Port Selector	1 x 2.5mm Audio Jack Female
Emulation	
Keyboard / Mouse	USB
Video	4096 x 2160 @ 60Hz
LEDs	
KVM	2 (White)
Power Consumption	DC5V: 2.18W
Environmental	
Operating Temperature	0 – 50°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Weight	0.12 kg (0.26 lb)
Dimensions (L x W x H)	9.37 x 9.30 x 2.68 cm (3.69 x 3.66 x 1.06 in.)
Carton Lot	10 pcs
Included Accessories	2x DisplayPort 1.2 Cables; 2x USB Cables; 2x Audio Cables; 1x Remote Port Selector

CS1842 / CS1844

2/4-Port USB 3.0 4K HDMI Dual Display KVM[™] Switch

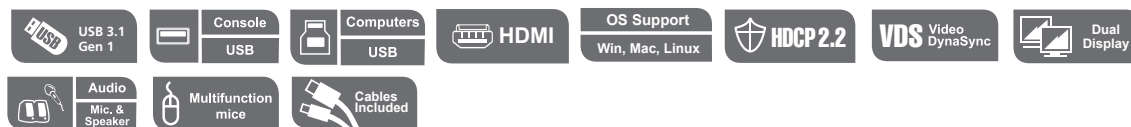

Front

- CS1842



- CS1844



Rear

- CS1842



- CS1844



Features

- One USB keyboard, mouse and two HDMI monitors control two/four HDMI computers and share two USB peripherals
- Supports Quad Display by connecting two Dual Display KVM switches
- Supports superior video quality – up to 4K DCI (4096 x 2160 @ 60Hz)
- Computer selection via front panel pushbuttons, hotkeys, mouse¹, RS-232 commands, and remote port selector
- Built-in 2-port USB 3.1 Gen 1 hub with SuperSpeed 5 Gbps data transfer rates
- [Video DynaSync[™]](#) – exclusive ATEN technology that optimizes display resolution, speeds up switching between systems, and ensures that windows opened on an extended desktop will not revert to their default configurations on the main display when switching between ports
- Supports console keyboard emulation/bypass feature
- Supports console mouse emulation/bypass feature
- HDMI compliant; HDCP 2.2 compliant
- Supports HD Audio²
- Firmware upgradable

Note: 1. Mouse port switching is only supported under mouse emulation mode and by USB 3-key wheel mice.
2. HD audio through HDMI cannot be switched independently.

Specifications


	CS1842	CS1844
Computer Connections	2	4
Port Selection	Pushbutton, Hotkey, RS-232 Commands, Mouse, Remote Port Selector	
Connectors		
Console Ports	2 x USB Type A Female (Black); 2 x HDMI Female (Black); 2 x 3.5mm Audio Jack Female (Green; 1 x front, 1 x rear); 2 x 3.5mm Audio Jack Female (Pink; 1 x front, 1 x rear)	
KVM (Computer) Ports	2 x USB 3.1 Gen1 Type B Female (Blue) 4 x HDMI Female (Black) 2 x 3.5mm Audio Jack Female (Green) 2 x 3.5mm Audio Jack Female (Pink)	4 x USB 3.1 Gen1 Type B Female (Blue) 8 x HDMI Female (Black) 4 x 3.5mm Audio Jack Female (Green) 4 x 3.5mm Audio Jack Female (Pink)
Daisy Chain Ports	1 x RJ-45 Female	
Remote Port Selector	1 x 2.5mm Audio Jack Female	
Power	1 x DC Jack	
USB Hub	2 x USB 3.1 Gen1 Type A Female (Blue; 1 x front, 1 x rear)	
Emulation		
Keyboard / Mouse	USB	
Video	4096 x 2160 @ 60Hz	
Power Consumption	DC 12V: 3.17W	DC 12V: 4.42W
Environmental		
Operating Temperature	0 – 40°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal	
Weight	1.60 kg (3.52 lb)	1.57 kg (3.46 lb)
Dimensions (L x W x H)	33.50 x 16.05 x 4.40 cm (13.19 x 6.32 x 1.73 in.)	
Carton Lot	3 pcs	
Included Accessories	4 x HDMI Cables; 2 x USB 3.0 Cables; 4 x Audio Cables; 1 x Power Adapter; 1 x Remote Port Selector	8 x HDMI Cables; 4 x USB 3.0 Cables; 8 x Audio Cables; 1 x Power Adapter; 1 x Remote Port Selector

Optional Accessories

Type	Part No. / Spec.	Page No.
HDMI Cables	2L-7D01H (1 m), 2L-7D02H-1 (2 m), 2L-7D03H (3 m), 2L-7D05H (5 m), 2L-7D05H-1 (5 m), 2L-7D10H (10 m), 2L-7D15H (15 m), 2L-7D20H (20 m)	12-2
USB HDMI KVM Cables	2L-7D02UH (1.8 m)	12-3

CS1822 / CS1824

2/4-Port USB 3.0 4K HDMI KVM[™] Switch with Audio Mixer Mode

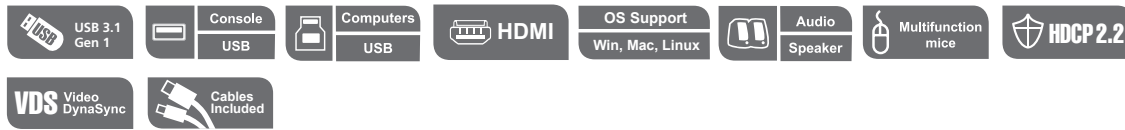

Front

- CS1822



- CS1824



Rear

- CS1822



- CS1824



Features

- One USB keyboard/mouse and one HDMI monitor control two/four computers and share two USB peripherals
- **Audio Mixer Modes** – mixes up to two audio sources as audio output
- Supports superior video quality – up to 4K DCI (4096 x 2160 @ 60Hz)
- Built-in 2-port USB 3.1 Gen 1 hub with SuperSpeed 5 Gbps data transfer rates
- **Video DynaSync[™]** – exclusive ATEN technology eliminates boot-up display problems and optimizes the resolution when switching among different sources
- Computer selection via front panel pushbuttons, hotkeys, mouse¹, and RS-232 commands
- HDMI compliant; HDCP 2.2 compliant
- Supports HD Audio²
- Multilingual keyboard mapping – supports English, French, Japanese, and German keyboards
- Firmware upgradable

Note: 1. Mouse port switching is only supported under mouse emulation mode and by USB 3-key wheel mice.
2. HD audio through HDMI cannot be switched independently.

Specifications

	CS1822	CS1824
Computer Connections	2	4
Port Selection	Hotkey, Pushbutton, Mouse, RS-232 Commands	
Connectors		
Console Ports	2 x USB Type A Female; 1 x HDMI Female (Black); 2 x 3.5mm Audio Jack Female (Green; 1 x front, 1 x rear)	
KVM (Computer) Ports	2 x USB 3.1 Gen 1 Type B Female (Blue) 2 x HDMI Female (Black) 2 x 3.5mm Audio Jack Female (Green)	4 x USB 3.1 Gen 1 Type B Female (Blue) 4 x HDMI Female (Black) 4 x 3.5mm Audio Jack Female (Green)
Serial	1 x RJ-11 Female	
Power	1 x DC Jack	
USB Hub	2 x USB 3.1 Gen 1 Type A Female (Blue; 1 x front, 1 x rear)	
Emulation		
Keyboard / Mouse	USB	
Video	4096 x 2160 @ 60Hz	
Power Consumption	DC5V: 1.78W	DC5V: 2.535W
Environmental		
Operating Temperature	0 – 40°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal + Plastic	
Weight	0.74 kg (1.63 lb)	0.94 kg (2.07 lb)
Dimensions (L x W x H)	21.00 x 8.80 x 5.55 cm (8.27 x 3.46 x 2.19 in.)	27.00 x 8.80 x 5.55 cm (10.63 x 3.46 x 2.19 in.)
Carton Lot	5 pcs	
Included Accessories	2x HDMI Cables; 2x USB 3.0 Cables; 2x Audio Cables; 1x Power Adapter	4x HDMI Cables; 4x USB 3.0 Cables; 4x Audio Cables; 1x Power Adapter

Optional Accessories

Type	Part No. / Spec.	Page No.
HDMI Cables	2L-7D01H (1 m), 2L-7D02H-1 (2 m), 2L-7D03H (3 m), 2L-7D05H (5 m), 2L-7D05H-1 (5 m)	12-2

CS1792 / CS1794

2/4-Port USB HDMI/Audio KVM[™] Switch



Front

• CS1792



• CS1794



Rear

• CS1792



• CS1794



Features

- One USB console controls two/four USB HDMI computers
- Dolby True HD and DTS HD Master Audio support¹
- [Video DynaSync[™]](#) – exclusive ATEN technology eliminates boot-up display problems and optimizes the resolution when switching among different sources
- HDCP compliant
- Audio enabled – full bass response provides a rich experience for 2.1 channel surround sound systems
- Superior video quality – supports 480i, 480p, 720p, 1080i and 1080p (HDTV) / 1920 x 1200 (DVI)
- Console mouse port emulation / bypass feature supports most mouse drivers and multifunction mice
- Power on detection – if one of the computers is powered off, the switch will automatically switch to the next powered-on computer
- Supports keyboard combinations via emulation (for Mac)²

Note: 1. HD audio through HDMI cannot be switched independently.

2. PC keyboard combinations emulate Mac keyboards.
Mac keyboards work only with their own computers.

Specifications

	CS1792	CS1794
Computer Connections	2	4
Port Selection	Hotkey, Pushbutton	
Connectors		
Console Ports	2 x USB Type A Female (rear panel); 1 x HDMI Female (Black); 2 x 3.5mm Audio Jack Female (Green; 1 x front, 1 x rear); 2 x 3.5mm Audio Jack Female (Pink; 1 x front, 1 x rear)	
KVM Ports	2 x USB Type B Female 2 x HDMI Female (Black) 2 x 3.5mm Audio Jack Female (Green) 2 x 3.5mm Audio Jack Female (Pink)	4 x USB Type B Female 4 x HDMI Female (Black) 4 x 3.5mm Audio Jack Female (Green) 4 x 3.5mm Audio Jack Female (Pink)
Firmware Upgrade	1 x 3.5mm Audio Jack Female (Black)	
Power	1 x DC Jack	
USB Hub	2 x USB Type A Female (1 x front; 1 x rear)	
Emulation		
Keyboard / Mouse	USB	
Video	1920 x 1080 @ 60Hz / 1920 x 1200 @ 60Hz	
LEDs		
Audio	3 (Green)	5 (Green)
KVM	3 (Orange)	5 (Orange)
USB	3 (Green)	5 (Green)
Power Consumption	DC5.3V: 5.35W	DC5.3V: 3.62W
Environmental		
Operating Temperature	0 – 50°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal + Plastic	
Weight	0.42 kg (0.93 lb)	0.53 kg (1.17 lb)
Dimensions (L x W x H)	20.63 x 7.24 x 4.40 cm (8.12 x 2.85 x 1.73 in.)	26.23 x 7.68 x 4.40 cm (10.33 x 3.02 x 1.73 in.)
Carton Lot	5 pcs	
Included Accessories	2x USB HDMI KVM Cables; 1x Firmware Upgrade Cable; 1x Power Adapter	4x USB HDMI KVM Cables; 1x Firmware Upgrade Cable; 1x Power Adapter

Optional Accessories

Type	Part No. / Spec.	Page No.
USB HDMI KVM Cable	2L-7D02UH (1.8 m)	12-3

CS1642A / CS1644A

2/4-Port USB DVI Dual Link Dual Display/Audio KVM™ Switch

Dual Link

Supports Quad Display with 2 Dual Display KVM Switches



Front

• CS1642A



• CS1644A



Rear

• CS1642A



• CS1644A



Features

- Supports Quad Display by connecting two Dual Display KVM switches
- [Video DynaSync™](#) – exclusive ATEN technology eliminates boot-up display problems and optimizes the resolution when switching among different sources
- HDCP compliant
- Customizable front panel pushbuttons – set the pushbutton with your favorite hotkey command to activate any function from the front panel
- Console expansion – easily connect multiple CS1642A / CS1644A units for an extended multi-view KVM console setup with more computers
- One dual-screen USB console controls two/four computers
- Fully compliant with the DVI-Digital and DVI-Analog specification
- Audio enabled – full bass response provides a rich experience for 2.1 channel surround sound systems
- Console mouse port emulation / bypass feature supports most mouse drivers and multifunction mice
- Supports keyboard combinations via emulation (for Mac/Sun)¹

Note: 1. PC keyboard combinations emulate Mac/Sun keyboards.
Mac/Sun keyboards work only with their own computers.

Specifications

	CS1642A	CS1644A
Computer Connections	2	4
Port Selection	Hotkey, Pushbutton, Mouse	
Connectors		
Console Ports	2 x USB Type A Female (rear panel) 2 x DVI-I Female (White) 1 x 3.5mm Audio Jack Female (Green) 1 x 3.5mm Audio Jack Female (Pink)	
KVM Ports	2 x USB Type B Female 4 x DVI-I Female (White) 2 x 3.5mm Audio Jack Female (Green) 2 x 3.5mm Audio Jack Female (Pink)	4 x USB Type B Female 8 x DVI-I Female (White) 4 x 3.5mm Audio Jack Female (Green) 4 x 3.5mm Audio Jack Female (Pink)
Daisy Chain Ports	1 x RJ-45 Female (rear panel)	
Power	1 x DC Jack	
USB Hub	2 x USB Type A Female (1 x front; 1 x rear)	
Emulation		
Keyboard / Mouse	USB	
Video	DVI Dual Link: 2560 x 1600 @ 60Hz; 3D Display: 1920 x 1200 @ 120Hz	
Power Consumption	DC5.3V: 3.77W	DC5.3V: 5.34W
Environmental		
Operating Temperature	0 – 50°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal + Plastic	
Weight	0.56 kg (1.23 lb)	2.32 kg (5.11 lb)
Dimensions (L x W x H)	26.23 x 7.68 x 4.40 cm (10.33 x 3.02 x 1.73 in.)	43.72 x 15.98 x 4.40 cm (17.21 x 6.29 x 1.73 in.)
Carton Lot	5 pcs	3 pcs
Included Accessories	2x USB DVI-D Dual Link KVM Cables; 2x DVI-D Dual Link Cables; 1x Power Adapter	4x USB DVI-D Dual Link KVM Cables; 4x DVI-D Dual Link Cables; 1x Power Adapter

Optional Accessories

Type	Part No. / Spec.	Page No.
USB DVI-D Single Link KVM Cables	2L-7D02U (1.8 m), 2L-7D03U (3 m), 2L-7D05U (5 m)	12-3
USB DVI-I Single Link KVM Cables	2L-7D02UI (1.8 m), 2L-7D03UI (3 m)	12-3
USB DVI-D Dual Link KVM Cables	2L-7D02UD (1.8 m), 2L-7D03UD (3 m), 2L-7D05UD (5 m)	12-3
DVI-D Dual Link Cables	2L-7D03DD (3 m), 2L-7D05DD (5 m)	12-3

CS1782A / CS1784A

2/4-Port USB DVI Dual Link/Audio KVM[™] Switch

Dual Link DVI & 7.1* Surround Sound USB KVM[™] Switch



Dual Link



(*CS1782A only)

• CS1782A



• CS1784A



Front

• CS1782A



• CS1784A



Rear

• CS1782A



• CS1784A



Features

- DVI digital and analog monitor support – fully compliant with the DVI specifications
- [Video DynaSync[™]](#) – exclusive ATEN technology eliminates boot-up display problems and optimizes the resolution when switching among different sources
- Full bass response for high quality 2.1 channel (CS1784A) / 7.1 channel surround sound systems (CS1782A)
- Superior video quality – 1920 x 1200 @ 60Hz (Single Link); 2560 x 1600 @ 60Hz (Dual Link)
- nVidia 3D Vision Ready – works with cutting edge 120Hz LCD monitors and active shutter glasses to create a 3D environment with maximum resolution of up to 1920 x 1080 for your ideal workspace and entertainment
- 2/4-port DVI KVM Switch with USB 2.0 and 7.1 / 2.1 surround sound audio
- HDCP compliant
- Power on detection
- Console mouse port emulation / bypass feature that supports most mouse drivers and multifunction mice
- Console keyboard emulation / bypass feature that supports most gaming / multimedia keyboards
- Multilingual keyboard mapping – supports English, French and Japanese keyboards
- Supports keyboard combinations via emulation (for Mac/Sun)¹

Note: 1. PC keyboard combinations emulate Mac/Sun keyboards. Mac/Sun keyboards work only with their own computers.

Specifications

	CS1782A	CS1784A
Computer Connections	2	4
Port Selection	Hotkey, Pushbutton, Mouse	
Connectors		
Console Ports	2 x USB Type A Female (rear) 1 x DVI-I Female (White) 2 x 3.5mm Audio Jack Female (Green; 1 x front, 1 x rear) 1 x 3.5mm Audio Jack Female (Blue) 1 x 3.5mm Audio Jack Female (Gray) 1 x 3.5mm Audio Jack Female (Black) 1 x 3.5mm Audio Jack Female (Orange) 2 x 3.5mm Audio Jack Female (Pink; 1 x front, 1 x rear)	2 x USB Type A Female (rear) 1 x DVI-I Female (White) 2 x 3.5mm Audio Jack Female (Green; 1 x front, 1 x rear) 2 x 3.5mm Audio Jack Female (Pink; 1 x front, 1 x rear)
KVM Ports	2 x USB Type B Female 2 x DVI-I Female (White) 2 x 3.5mm Audio Jack Female (Green) 2 x 3.5mm Audio Jack Female (Blue) 2 x 3.5mm Audio Jack Female (Gray) 2 x 3.5mm Audio Jack Female (Black) 2 x 3.5mm Audio Jack Female (Orange) 2 x 3.5mm Audio Jack Female (Pink)	4 x USB Type B Female 4 x DVI-I Female (White) 4 x 3.5mm Audio Jack Female (Green) 4 x 3.5mm Audio Jack Female (Pink)
Power	1 x DC Jack	
USB Hub	2 x USB Type A Female (1 x front, 1 x rear)	
Emulation		
Keyboard / Mouse	USB	
Video	DVI Single Link: 1920 x 1200 @ 60Hz; DVI Dual Link: 2560 x 1600 @ 60Hz	
Power Consumption	DC5.3V: 3.3W	DC5.3V: 5.91W
Environmental		
Operating Temperature	0 – 50°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal	
Weight	0.90 kg (1.98 lb)	0.93 kg (2.05 lb)
Dimensions (L x W x H)	27.00 x 8.80 x 5.55 cm (10.63 x 3.46 x 2.19 in.)	
Carton Lot	5 pcs	
Included Accessories*	2x USB DVI-D Dual Link KVM Cables; 2x Custom 7.1 Channel Surround Sound Cables; 1x Power Adapter	4x USB DVI-D Dual Link KVM Cables; 1x Power Adapter

Note: * 1. Custom KVM Cable: 1.8 m x 2 (CS1782A); 1.8 m x 4 (CS1784A)
 2. Channel Surround Sound Cable: 1.8 m x 2 (CS1782A)

Optional Accessories

Type	Part No. / Spec.	Page No.
USB DVI-D Single Link KVM Cables	2L-7D02U (1.8 m), 2L-7D03U (3 m), 2L-7D05U (5 m)	12-3
USB DVI-I Single Link KVM Cable	2L-7D02UI (1.8 m), 2L-7D03UI (3 m)	12-3
USB DVI-D Dual Link KVM Cables	2L-7D02UD (1.8 m), 2L-7D03UD (3 m), 2L-7D05UD (5 m)	12-3

CS1762A / CS1764A

2/4-Port USB DVI/Audio KVM[™] Switch

Control 2 / 4 DVI Computers from a single USB / DVI Console



Front

- CS1762A



- CS1764A



Rear

- CS1762A



- CS1764A



Features

- Fully compliant with the DVI-D and DVI-A specifications
- [Video DynaSync[™]](#) – exclusive ATEN technology eliminates boot-up display problems and optimizes the resolution when switching among different sources
- HDCP compliant
- One USB console controls two/four DVI computers
- Audio enabled – full bass response provides a rich experience for 2.1 channel surround sound systems
- Console mouse port emulation / bypass feature supports most mouse drivers and multifunction mice
- Power on detection – if one computer is powered off, the CS1762A / CS1764A will automatically switch to the next powered-on computer
- Multilingual keyboard mapping – supports English, French and Japanese keyboards
- Supports keyboard combinations via emulation (for Mac/Sun)¹

Note: 1. PC keyboard combinations emulate Mac/Sun keyboards.
Mac/Sun keyboards work only with their own computers.

Specifications

	CS1762A	CS1764A
Computer Connections	2	4
Port Selection	Hotkey, Pushbutton, Mouse	
Connectors		
Console Ports	2 x USB Type A Female 1 x DVI-I Female (White) 1 x 3.5mm Audio Jack Female (Green; rear) 1 x 3.5mm Audio Jack Female (Pink; rear)	2 x USB Type A Female 1 x DVI-I Female (White) 2 x 3.5mm Audio Jack Female (Green; 1 x front, 1 x rear) 2 x 3.5mm Audio Jack Female (Pink; 1 x front, 1 x rear)
KVM Ports	2 x USB Type B Female 2 x DVI-I Female (White) 2 x 3.5mm Audio Jack Female (Green) 2 x 3.5mm Audio Jack Female (Pink)	4 x USB Type B Female (White) 4 x DVI-I Female (White) 4 x 3.5mm Audio Jack Female (Green) 4 x 3.5mm Audio Jack Female (Pink)
Power	1 x DC Jack	
USB Hub	2 x USB Type A Female (rear)	2 x USB Type A Female (1 x front, 1 x rear)
Emulation		
Keyboard / Mouse	USB	
Video	1920 x 1200 @ 60Hz; DDC2B	
LEDs		
On Line / Selected	2 (Orange)	4 (Orange)
USB Link	2 (Green)	4 (Green)
Power Consumption	DC5.3V: 3.78W	DC5.3V: 4.8W
Environmental		
Operating Temperature	0 – 50°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal	
Weight	0.73 kg (1.61 lb)	0.94 kg (2.07 lb)
Dimensions (L x W x H)	21.00 x 8.80 x 5.55 cm (8.27 x 3.46 x 2.19 in.)	27.00 x 8.80 x 5.55 cm (10.63 x 3.46 x 2.19 in.)
Carton Lot	5 pcs	
Included Accessories	2x USB DVI-D Single Link KVM Cables; 1x Power Adapter	4x USB DVI-D Single Link KVM Cables; 1x Power Adapter

Optional Accessories

Type	Part No. / Spec.	Page No.
USB DVI-D Single Link KVM Cables	2L-7D02U (1.8 m), 2L-7D03U (3 m), 2L-7D05U (5 m)	12-3
USB DVI-I Single Link KVM Cables	2L-7D02UI (1.8 m), 2L-7D03UI (3 m)	12-3

CS72D

2-Port USB DVI/Audio Slim KVM Switch



Front



Rear



Features

- Compact size with ergonomic style
- HDCP compliant
- [Video DynaSync™](#) – exclusive ATEN technology eliminates boot-up display problems and optimizes the resolution when switching among different sources
- USB 2.0 mouse port can be used as a USB hub and for USB peripheral sharing
- Fully compliant with DVI specification (digital only)
- Supports wireless mouse / keyboard
- Console mouse port emulation / bypass feature supports most mouse drivers and multifunction mice
- Audio enabled – full bass response provides a rich experience for 2.1 channel surround sound systems
- Power on detection – if one computer is powered off, the switch will automatically switch to the next powered-on computer
- Complete keyboard emulation for error-free booting
- Bus-powered – no external power adapter required
- Supports keyboard combinations via emulation (for Mac/Sun)¹

Note: 1. PC keyboard combinations emulate Mac/Sun keyboards.
Mac/Sun keyboards work only with their own computers.

Specifications

	CS72D
Computer Connections	2
Console Connections	1
Port Selection	Hotkey, Pushbutton, Mouse
Connectors	
Console Ports	2 x USB Type A Female 1 x DVI-D Female (White) 1 x 3.5mm Audio Jack Female (Green)
Computer Port 1	1 x 44-pin Connector Female
Pushbuttons	2
Emulation	
Keyboard / Mouse	USB
Video	1920 x 1080 @ 60Hz; 1920 x 1200 @ 60Hz
Power Consumption	DC5V: 1.67W
Environmental	
Operating Temperature	0 – 50°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Metal
Weight	0.33 kg (0.73 lb)
Dimensions (L x W x H)	12.50 x 8.20 x 2.50 cm (4.92 x 3.23 x 0.98 in.)
Carton Lot	10 pcs
Included Accessories	1x 1.2 m 44-pin Custom KVM Cable

CS1742 / CS1744

2/4-Port USB VGA Dual Display/Audio KVM[™] Switch

Dual Display (2 VGA Card PC) USB KVM Switch + Audio



Front

- CS1742



- CS1744



Rear

- CS1742



- CS1744



Features

- One dual-screen USB console controls two/four dual display computers
- Audio enabled – full bass response provides a rich experience for 2.1 channel surround sound systems
- Supports keyboard combinations via emulation (for Mac/Sun)¹
- Multiplatform support: compatible with all operation platforms PC – Windows, Linux, Mac and Sun
- Buzzer on/off via hotkey
- Keyboard and mouse emulation for error-free booting
- Bus-powered – no external power adapter required

Note: 1. PC keyboard combinations emulate Mac/Sun keyboards. Mac/Sun keyboards work only with their own computers.

Specifications

	CS1742	CS1744
Computer Connections	2	4
Port Selection	Hotkey, Pushbutton	
USB Port / Audio Port Selection	Hotkey	
Connectors		
Console Ports	2 x USB Type A Female (White) 2 x HDB-15 Female (Blue) 1 x 3.5mm Audio Jack Female (Green) 1 x 3.5mm Audio Jack Female (Pink)	
KVM Ports	2 x SPHD Male (Yellow) 2 x SPHD Female (Green)	4 x SPHD Male (Yellow) 4 x SPHD Female (Green)
Firmware Upgrade	1 x RJ-11 Female (Black)	
Power	1 x DC Jack (Black)	
USB Hub	2 x USB Type A Female (White)	
Emulation		
Keyboard / Mouse	USB	
Video	2048 x 1536; DDC2B	
LEDs		
On Line / Selected	2 (Orange)	4 (Orange)
USB Link	2 (Green)	4 (Green)
Power Consumption	DC5V: 0.98W	DC5V: 1.13W
Environmental		
Operating Temperature	0 – 50°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal	
Weight	0.82 kg (1.81 lb)	1.03 kg (2.27 lb)
Dimensions (L x W x H)	21.00 x 8.80 x 5.55 cm (8.27 x 3.46 x 2.19 in.)	27.00 x 8.80 x 5.55 cm (10.63 x 3.46 x 2.19 in.)
Carton Lot	5 pcs	5 pcs
Included Accessories	2x KVM Cables (Audio / Video); 2x KVM Cables (USB / Video); 1x Firmware Upgrade Cable	4x KVM Cables (Audio / Video); 4x KVM Cables (USB / Video); 1x Firmware Upgrade Cable

Optional Accessories

Type	Part No. / Spec.	Page No.
Audio / Video KVM Cables	2L-5203A (3 m), 2L-5205A (5 m)	12-1
USB / Video KVM Cables	2L-5201U (1.2 m), 2L-5202U (1.8 m), 2L-5203U (3 m), 2L-5205U (5 m)	12-2
Power Adapter	DC5V, 2.6A	N/A

CS1732B / CS1734B

2/4-Port PS/2-USB VGA/Audio KVM[™] Switch with OSD

Advanced USB 2.0 KVM[™] Switch + Audio + OSD



Front



Rear



Features

- Dual Interface – supports computers with PS/2 or USB keyboards and mice configurations
- [Video DynaSync[™]](#) – exclusive ATEN technology eliminates boot-up display problems and optimizes the resolution when switching among different sources
- Supports multilingual OSD operation
- One USB console controls two/four computers
- Audio enabled – full bass response provides a rich experience for 2.1 channel surround sound systems
- Console audio ports on front panel for easy access – ideal for IP phones
- Console mouse port emulation / bypass feature supports most mouse drivers and multifunction mice
- Supports keyboard combinations via emulation (for Mac/Sun)¹

Note: 1. PC keyboard combinations emulate Mac/Sun keyboards.
Mac/Sun keyboards work only with their own computers.

Specifications

	CS1732B	CS1734B
Computer Connections	2	4
Console Connections	Hotkey, Pushbutton, OSD, Mouse	
Connectors		
Console Ports	2 x USB Type A Female 1 x HDB-15 Female (Blue) 2 x 3.5mm Audio Jack Female (Green) 2 x 3.5mm Audio Jack Female (Pink)	
KVM Ports	2 x SPHD Female (Yellow) 2 x 3.5mm Audio Jack Female (Green) 2 x 3.5mm Audio Jack Female (Pink)	4 x SPHD Female (Yellow) 4 x 3.5mm Audio Jack Female (Green) 4 x 3.5mm Audio Jack Female (Pink)
Firmware Upgrade	1 x 4-conductor 3.5mm Jack (Black)	
Power	1 x DC Jack	
USB Hub	2 x USB Type A Female	
Emulation		
Keyboard / Mouse	PS/2; USB	
Video	2048 x 1536 @ 60Hz; DDC2B	
LEDs		
Online / Selected	2 (Orange)	4 (Orange)
USB Link	2 (Green)	4 (Green)
Power Consumption	DC5.3V: 2.53W	DC5V: 1.02W
Environmental		
Operating Temperature	0 – 50°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal	
Weight	0.55 kg (1.21 lb)	0.78 kg (1.72 lb)
Dimensions (L x W x H)	14.00 x 8.80 x 5.55 cm (5.51 x 3.46 x 2.19 in.)	21.00 x 8.80 x 5.55 cm (8.27 x 3.46 x 2.19 in.)
Carton Lot	10 pcs	5 pcs
Included Accessories	2x Custom KVM Cables (VGA, USB, Audio); 2x OSD/Hotkey Stickers; 1x Firmware Upgrade Cable; 1x Power Adapter	4x Custom KVM Cables (VGA, USB, Audio); 2x OSD/Hotkey Stickers; 1x Firmware Upgrade Cable; 1x Power Adapter

Optional Accessories

Type	Part No. / Spec.	Page No.
PS/2 KVM Cables	2L-5302P (1.8 m), 2L-5303P (3 m), 2L-5305P (5 m)	12-2
USB / Video KVM Cables	2L-5301U (1.2m) , 2L-5302U (1.8 m), 2L-5303U (3 m), 2L-5305U (5 m)	12-2

CS1732A / CS1734A

2/4-Port PS/2-USB VGA/Audio KVM[™] Switch

All-in-one Combo Desktop KVM Switch + Audio



Front

• CS1732A



• CS1734A



Rear

• CS1732A



• CS1734A



Features

- Dual interface supports computers with PS/2 or USB keyboards and mice
- Auto PS/2 and USB interface detection
- Audio enabled – full bass response provides a rich experience for 2.1 channel surround sound systems
- One USB console controls two/four computers and additional USB devices
- Keyboard and mouse emulation for error-free booting
- Buzzer on/off via hotkey
- Multiplatform support – compatible with Windows, Linux, Mac and Sun
- Bus-powered – no external power adapter required

Specifications

	CS1732A	CS1734A
Computer Connections	2	4
Port Selection	Hotkey, Pushbutton	
USB Port / Audio Port Selection	Hotkey	
Connectors		
Console Ports	2 x USB Type A Female (White) 1 x HDB-15 Female (Blue) 1 x 3.5mm Audio Jack Female (Green) 1 x 3.5mm Audio Jack Female (Pink)	
KVM Ports	2 x SPHD Female (Yellow) 2 x 3.5mm Audio Jack Female (Green) 2 x 3.5mm Audio Jack Female (Pink)	4 x SPHD Female (Yellow) 4 x 3.5mm Audio Jack Female (Green) 4 x 3.5mm Audio Jack Female (Pink)
Firmware Upgrade	1 x RJ-11 Female (Black)	
Power	1 x DC Jack	
USB Hub	2 x USB Type A Female	
Emulation		
Keyboard / Mouse	USB	
Video	2048 x 1536; DDC2B	
LEDs		
Online / Selected	2 (Orange)	4 (Orange)
USB Link	2 (Green)	4 (Green)
Power Consumption	DC5V: 0.94W	DC5V: 1.02W
Environmental		
Operating Temperature	0 – 50°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal	
Weight	0.55 kg (1.21 lb)	0.78 kg (1.72 lb)
Dimensions (L x W x H)	14.00 x 8.80 x 5.55 cm (5.51 x 3.46 x 2.19 in.)	21.00 x 8.80 x 5.55 cm (8.27 x 3.46 x 2.19 in.)
Carton Lot	10 pcs	5 pcs
Included Accessories	2x USB KVM Cables; 1x Firmware Upgrade Cable	4x USB KVM Cables; 1x Firmware Upgrade Cable

Optional Accessories

Type	Part No. / Spec.	Page No.
PS/2 KVM Cables	2L-5302P (1.8 m), 2L-5303P (3 m), 2L-5305P (5 m)	12-2
USB / Video KVM Cables	2L-5301U (1.2 m), 2L-5302U (1.8 m), 2L-5303U (3 m), 2L-5305U (5 m)	12-2
Power Adapter	DC5V, 2.6A	N/A

CS82U / CS84U

2/4-Port PS/2-USB VGA KVM Switch



Front

• CS82U



• CS84U



Rear

• CS82U



• CS84U



Features

- Dual Interface – supports computers with PS/2 or USB keyboards and mice
- [Video DynaSync™](#) – exclusive ATEN technology eliminates boot-up display problems and optimizes the resolution when switching among different sources
- One PS/2-USB VGA console controls two/four computers
- USB mouse port can be used as a USB 1.1 hub and for USB 1.1 peripheral sharing
- Console mouse port emulation / bypass feature supports most mouse drivers and multifunction mice
- Supports most gaming keyboards
- Multilingual keyboard mapping – supports English, Japanese and French keyboards
- Supports keyboard combinations via emulation (for Mac/Sun)¹
- Bus-powered – no external power adapter required

Note: 1. PC keyboard combinations emulate Mac/Sun keyboards. Mac/Sun keyboards work only with their own computers.

Specifications

	CS82U	CS84U
Computer Connections	2	4
Port Selection	Hotkey, Pushbutton, USB Mouse	
Connectors		
Console Ports	2 x USB Type A Female 1 x 6-pin Mini-DIN Female (Purple) 1 x 6-pin Mini-DIN Female (Green) 1 x HDB-15 Female (Blue)	
KVM Ports	2 x SPHD Female (Yellow)	4 x SPHD Female (Yellow)
Power	1 x DC Jack	
Emulation		
Keyboard / Mouse	PS/2, USB	
Video	2048 x 1536 @ 60Hz; DDC2B	
LEDs		
Online	2 (Orange)	4 (Orange)
Selected	2 (Green)	4 (Green)
Power Consumption	DC5V: 0.72W	DC5V: 0.45W
Environmental		
Operating Temperature	0 – 50°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal	
Weight	0.54 kg (1.19 lb)	0.77 kg (1.7 lb)
Dimensions (L x W x H)	14.00 x 8.80 x 5.55 cm (5.51 x 3.46 x 2.19 in.)	21.00 x 8.80 x 5.55 cm (8.27 x 3.46 x 2.19 in.)
Carton Lot	10 pcs	5 pcs
Included Accessory	2x PS/2-USB KVM Cables	4x PS/2-USB KVM Cables

Optional Accessories

Type	Part No. / Spec.	Page No.
PS/2-USB KVM Cables	2L-5301UP (1.2 m), 2L-5302UP (1.8 m), 2L-5303UP (3 m)	12-2
USB / Video KVM Cables	2L-5201U (1.2 m), 2L-5202U (1.8 m), 2L-5203U (3 m), 2L-5205U (5 m)	12-2
Power Adapter	DC5V, 2.6A	N/A

CS72U / CS74U

2/4-Port USB VGA/Audio KVM Switch



Front

• CS72U



• CS74U



Rear

• CS72U



• CS74U



Features

- One USB VGA console controls two/four computers
- Audio enabled – full bass response provides a rich experience for 2.1 channel surround sound systems
- Supports USB hot-plugging
- Bus-powered – no external power adapter required

Specifications

	CS72U	CS74U
Computer Connections	2	4
Port Selection	Pushbutton	
Connectors		
Console Ports	2 x USB Type A Female (Black) 1 x HDB-15 Female (Blue) 1 x 3.5mm Audio Jack Female (Pink) 1 x 3.5mm Audio Jack Female (Green)	
KVM Ports	2 x SPHD Female (Green)	4 x SPHD Female (Green)
Power	1 x DC 5V Jack (Spare)	
Video	2048 x 1536 @ 60Hz; DDC2B	
LEDs		
Online	2 (Orange)	4 (Orange)
Selected	2 (Green)	4 (Green)
Power Consumption	DC5V: 0.142W	DC5V: 0.177W
Environmental		
Operating Temperature	0 – 50°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal	
Weight	0.45 kg (0.99 lb)	0.64 kg (1.41 lb)
Dimensions (L x W x H)	13.00 x 7.65 x 4.40 cm (5.12 x 3.01 x 1.73 in.)	20.00 x 7.65 x 4.40 cm (7.87 x 3.01 x 1.73 in.)
Carton Lot	20 pcs	5 pcs
Included Accessory	2x USB KVM Cables	4x USB KVM Cables

Optional Accessories

Type	Part No. / Spec.	Page No.
USB / Video KVM Cables	2L-5201U (1.2 m), 2L-5202U (1.8 m), 2L-5203U (3 m), 2L-5205U (5 m)	12-2
Power Adapter	DC5V, 2.6A	N/A

CS82A / CS84A

2/4-Port PS/2 VGA KVM Switch



Front

• CS82A



• CS84A



Rear

• CS82A



• CS84A



Features

- One PS/2 console controls two/four computers
- Compact, sturdy, durable metal housing
- Keyboard and mouse emulation for error-free booting
- Auto Scan function to monitor computer operation
- Bus-powered – no external power adapter required

Specifications

	CS82A	CS84A
Computer Connections	2	4
Port Selection	Hotkey, Pushbutton	
Connectors		
Console Ports	1 x HDB-15 Female (Blue) 1 x 6-pin Mini-DIN Female (Purple) 1 x 6-pin Mini-DIN Female (Green)	
KVM Ports	2 x HDB-15 Male (Blue) 2 x 6-pin Mini-DIN Female (Purple) 2 x 6-pin Mini-DIN Female (Green)	4 x HDB-15 Male (Blue) 4 x 6-pin Mini-DIN Female (Purple) 4 x 6-pin Mini-DIN Female (Green)
Power	1 x DC Jack	
Emulation		
Keyboard / Mouse	PS/2	
Video	1920 x 1440 @ 60Hz; DDC2B	
LEDs		
Online	2 (Orange)	4 (Orange)
Selected	2 (Green)	4 (Green)
Power Consumption	DC9V: 0.3W	DC9V: 0.3W
Environmental		
Operating Temperature	0 – 50°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal	
Weight	0.54 kg (1.19 lb)	0.78 kg (1.72 lb)
Dimensions (L x W x H)	14.00 x 8.80 x 5.55 cm (5.51 x 3.46 x 2.19 in.)	21.00 x 8.80 x 5.55 cm (8.27 x 3.46 x 2.19 in.)
Carton Lot	10 pcs	5 pcs
Included Accessory	2x PS/2 KVM Cables	4x PS/2 KVM Cables

Optional Accessories

Type	Part No. / Spec.	Page No.
PS/2 KVM Cables	2L-1001P/C (1.8 m), 2L-1003P/C (3 m), 2L-1005P/C (5 m), 2L-1006P/C (6 m), 2L-1010P/C (10 m), 2L-1020P/C (20 m) 2L-5001P/C (1.2 m), 2L-5002P/C (1.8 m), 2L-5003P/C (3 m), 2L-5005P/C (5 m)	12-1
Cables & Converters for USB Interface Support	2L-5502UP (1.8 m), 2L-5503UP (3 m), 2L-5506UP (6 m) Supports Mac Keyboards Emulation: UC100KMA	12-1 9-3
Power Adapter	DC9V, 300mA	N/A

CS74E

4-Port PS/2 VGA Slim KVM Switch



Front



Rear

Features

- One PS/2 console controls four computers
- Compact, modern case for convenient attractive placement
- Custom connector layout
- Keyboard and mouse emulation for error-free booting
- Auto Scan function to monitor computer operation
- Bus-powered – no external power adapter required

Specifications

	CS74E
Computer Connections	4
Port Selection	Hotkey, Pushbutton
Connectors	
Console Ports	1 x SPHD Male (Yellow)
KVM Ports	4 x SPHD Female (Yellow)
Power	1 x DC Jack
Emulation	
Keyboard / Mouse	PS/2
Video	2048 x 1536 @ 60Hz; DDC2B
LEDs	
Selected	4 (Green)
Power Consumption	DC5V: 0.39W
Environmental	
Operating Temperature	0 – 50°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Metal
Weight	0.49 kg (1.08 lb)
Dimensions (L x W x H)	20.00 x 8.15 x 2.50 cm (7.87 x 3.21 x 0.98 in.)
Carton Lot	10 pcs
Included Accessories	4x PS/2 KVM Cables; 1x Console Adapter Cable

Optional Accessories

Type	Part No. / Spec.	Page No.
PS/2 KVM Cables	2L-5201P (1.2 m), 2L-5202P (1.8 m), 2L-5203P (3 m), 2L-5206P (6 m), 2L-5210P (10 m)	12-1
Cables & Converters for USB Interface Support	2L-5202UP (1.8 m), 2L-5203UP (3 m), 2L-5205UP (5 m), 2L-5206UP (6 m) Supports Mac Keyboards Emulation: UC100KMA	12-1 9-3
Power Adapter	DC9V, 300mA	N/A

Computer Sharing Devices

CS261

USB DVI Computer Sharing Device

Share a DVI computer with two USB consoles



Features

- Single USB DVI-D computer is shared by two USB consoles
- Manual or Auto console selection
- Superior video quality – supports resolutions up to 1080p, 1920 x 1200, and 3840 x 2160 @ 30Hz¹
- **EDID Expert™** – selects optimum EDID settings for smooth power up, high-quality display and use of the best resolution across different monitors
- Supports RS-232 serial commands to switch operation and configure settings
- On screen display informs user when system is in use
- Private mode for a privileged user
- Screen Saver function
- Multiplatform Support – Windows, Linux, Mac and Sun
- HDCP 1.4 compliant
- No Software required

Note: 1. 3840 x 2160 @ 30Hz is supported when using DVI-to-HDMI cables.

Specifications

	CS261
Computer Connections	1
Connectors	
Console Ports	2 x DVI-D Female (White) 4 x USB Type A Female 2 x 3.5mm Audio Jack Female (Green) 2 x 3.5mm Audio Jack Female (Pink)
KVM Ports	1 x DVI-D Female (White) 1 x USB Type B Female 1 x 3.5mm Audio Jack Female (Green) 1 x 3.5mm Audio Jack Female (Pink)
RS-232	1 x RJ-11 Female
Power	1 x DC Jack (Black)
Console Selection	Pushbutton, Hotkey*, RS-232 Commands Note: *Selecting the console via hotkeys only works in Manual Mode
Video	3840 x 2160 @ 30Hz
LEDs	
Selected	2 (Green)
Manual	1 (Orange)
Power Consumption	DC5V: 2.4W
Environmental	
Operating Temperature	0 – 50°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Metal
Weight	0.72 kg (1.59 lb)
Dimensions (L x W x H)	21.00 x 8.80 x 5.55 cm (8.27 x 3.46 x 2.19 in.)
Carton Lot	5 pcs
Included Accessories	1x USB DVI-D Single Link KVM Cable; 1x Power Adapter

Optional Accessories

Type	Part No. / Spec.	Page No.
USB HDMI to DVI-D KVM Cable	2L-7D02DH (1.8 m)	12-3
USB DVI-D Single Link KVM Cables	2L-7D02U (1.8 m), 2L-7D03U (3 m), 2L-7D05U (5 m)	12-3
HDMI to DVI Adapter	2A-128G	12-4
DVI to HDMI Adapter	2A-127G	12-4

CS231

USB VGA Computer Sharing Device

Share a VGA computer with two consoles (USB, PS/2 compatible)



Front



Rear

Features

- Single USB VGA computer is shared by two USB consoles
- Manual or Auto console selection
- On Screen Display informs user when system is in use
- Private Mode for a privileged user
- Screen Saver function
- Supports USB and PS/2 computers
- Supports VGA and SVGA multisync monitors
- Multiplatform support – Windows, Linux, Mac and Unix
- No software required

Specifications

	CS231
Computer Connections	1
Connectors	
Console Ports	2 x HDB-15 Female (Blue) 4 x USB Type A Female
KVM Ports	1 x SPHD Female (Green)
Firmware Upgrade	1 x RJ-11 Female
Power	1 x DC Jack (Black)
Console Selection	Pushbutton, Hotkey* Note: *Selecting console via hotkeys only works in Manual Mode.
Video	1920 x 1440
LEDs	
Selected	2 (Green)
Manual	1 (Orange)
Power Consumption	DC5.3V: 1.6W
Environmental	
Operating Temperature	0 – 50°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Metal
Weight	0.56 kg (1.23 lb)
Dimensions (L x W x H)	14.00 x 8.80 x 5.55 cm (5.51 x 3.46 x 2.19 in.)
Carton Lot	10 pcs
Included Accessories	1x USB KVM Cable; 1x Firmware Upgrade Cable; 1x Power Adapter; 1x DIP Switch Sticker

Optional Accessories

Type	Part No. / Spec.	Page No.
USB KVM Cables	2L-5201U (1.2 m), 2L-5202U (1.8 m), 2L-5203U (3 m), 2L-5205U (5 m)	12-2
PS/2 KVM Cables	2L-5201P (1.2 m), 2L-5202P (1.8 m), 2L-5203P (3 m), 2L-5206P (6 m), 2L-5210P (10 m)	12-1
Adapters for PS/2 Console Support	PS/2 to USB Adapter: UC10KM	9-2
USB KVM Cables (with built-in PS/2 to USB Converter)	2L-5202UP (1.8 m), 2L-5203UP (3 m), 2L-5205UP (5 m), 2L-5206UP (6 m)	12-1

KVM Modules & Included Accessories


Converters / Emulators

ATEN provides a series of KVM switches that feature multiplatform support. In addition, we offer a host of converters to enable your KVM switches to support Windows, Linux, and Mac computers. By using ATEN converters, you eliminate the high cost and downtime associated with replacing KVM switches.





• USB Converters

For PC / Mac / Sun >

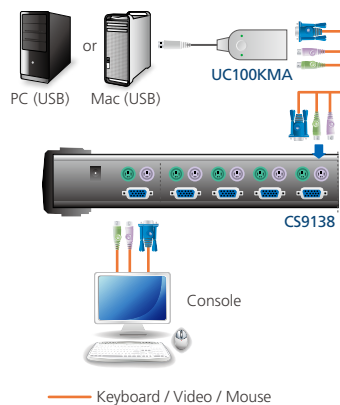

For PC only >

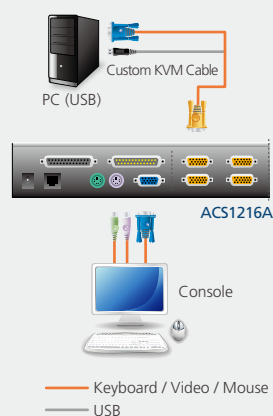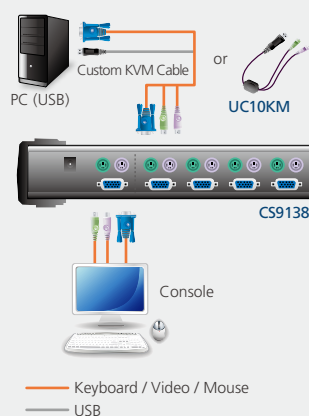

Note :

* Custom KVM cables are available in various lengths. Please refer to page 12-1

CV190

DisplayPort Console Converter



Features

- Compatible with SPHD-interfaced KVM switch to work with DisplayPort and USB-enabled target computers
- Supports high video resolution – up to 1920 x 1080 @ 60Hz
- DisplayPort 1.1 compliant
- Supports USB keyboard and mouse
- Bus-powered – no external power adapter required
- Easy installation – no software required

Specifications

	CV190
Console Connections	1
Connectors	
To Computer	1 x USB Type A Male 1 x DisplayPort Male
To Switch	1 x SPHD Male
LEDs	
Status	1 x Green: USB & DP Power 1 x Orange: USB Power
Video	1920 x 1080 @ 60Hz
Power Consumption	DC5V: 1.01W
Environmental	
Operating Temperature	0 – 50°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Weight	0.21 kg (0.46 lb)
Dimensions (L x W x H)	9.00 x 4.30 x 2.18 cm (3.54 x 1.69 x 0.86 in.)
Cable Length	1.8 m
Carton Lot	40 pcs

UC10KM

PS/2 to USB Adapter (90 cm)



Features

- Two PS/2 devices (keyboard and mouse) to USB Interface converter
- Supports PS/2 mice and Microsoft IntelliMouse
- Compatible with KVM switches
- USB 1.1 compliant
- Easy installation – no software required
- OS Support: Windows, Linux Redhat 7.0 or higher
- Bus-Powered

Specifications

	UC10KM
Connectors	
USB Port	1 x USB Type A Male (Black)
PS/2 Keyboard	1 x 6-pin Mini-DIN Female (Purple)
PS/2 Mouse	1 x 6-pin Mini-DIN Female (Green)
Cable Length	90 cm
Platforms	Windows / Linux
Data Rate	12 Mbps
USB Specification	USB 1.1 Compatible
Power Mode	Bus-Powered
Power Consumption	DC5V: 0.09W
Environmental	
Operating Temperature	0 – 50°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Weight	0.06 kg (0.13 lb)
Dimensions (L x W x H)	1.50 x 3.70 x 1.10 cm (0.59 x 1.46 x 0.43 in.)
Carton Lot	40 pcs

UC100KMA

PS/2 to USB Adapter with Mac support (30 cm)

OS Support

Win, Mac, Linux,
Sun, FreeBSD

Bus-Powered



Features

- Two PS/2 devices (keyboard and mouse) to USB Interface converter
- Supports PS/2 mice and Microsoft IntelliMouse
- Compatible with KVM switches
- USB specification compliant
- Easy installation – no software required
- Hotkey selection for OS and keyboard language supports
- OS Support: Windows 2000, Windows XP, Windows Vista, LINUX, Mac, Sun and FreeBSD
- External power adapter not required

Specifications

	UC100KMA
Connectors	
USB Port	1 x USB Type A Male (White)
PS/2 Keyboard	1 x 6-pin Mini-DIN Female (Purple)
PS/2 Mouse	1 x 6-pin Mini-DIN Female (Green)
LEDs	
Link	2 (Green)
Cable Length	30 cm
Platforms	Windows 2000 / XP/ Vista / Linux Mac OS 8.6 or Higher SUN Solaris 8
Data Rate	12 Mbps
Power Mode	Bus-Powered (via the USB cable)
Power Consumption	DC5V: 0.374W
Environmental	
Operating Temperature	0 – 50°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Weight	0.08 kg (0.18 lb)
Dimensions (L x W x H)	9.15 x 4.70 x 2.50 cm (3.6 x 1.85 x 0.98 in.)
Carton Lot	40 pcs

Thunderbolt & USB

ATEN offers a range of Thunderbolt and USB connectivity solutions to suit a wide variety of users and their applications. Our USB products give you the freedom to connect high-speed devices, such as external storage drives, optical drives, printers, and more.



- **Content Creation**

Hardware and software that empower creators to produce high-quality, professional video content.

- **Docking Stations**

Connect your laptop to a docking station and turn it into a multitasking workstation. ATEN's range of docking stations offer USB-C to Thunderbolt 3 support and expand connectivity with USB 3.2 Gen 1, HDMI, VGA, DisplayPort, Ethernet, audio, and power delivery. With these docking stations, you can spend more time working, playing and less time worrying about setup.

- **USB Converters**

ATEN USB-to-serial and USB-to-parallel converters aid in the transition to USB by allowing devices with traditional interfaces to communicate over USB interfaces. These converters help extend the useful life of your peripheral devices, thereby protecting your investment.

- **Docking Switches**

ATEN Thunderbolt and USB dock switches allow 2 computers to share the use of USB peripherals, including all necessary connectivity through a Thunderbolt / USB Type-C connection with one simple click.

- **Sharing Switches**

ATEN USB Sharing switches allow 2 to 4 computers to share the use of USB 3.2 Gen 2 / 3.2 Gen 1 / 2.0 peripheral devices on a one-at-a-time basis.

- **USB Hubs**

ATEN offers 4 port compact USB hubs for desktop and laptop computers. These are ideal for users who need to connect multiple devices, such as keyboards, mice, printers, scanners, and flash drives.

- **USB Extenders**

USB extender cables allow you to extend the distance between your computer and USB peripheral devices by several meters. These cables correct and transmit the signals as necessary to ensure optimal signal integrity. ATEN USB Extenders support USB 2.0 to USB 3.2 Gen 1 standard. They also extend the distance between your computer and USB peripheral over 100 m.

Note: The features highlighted above are not available in all products. Please refer to each product page for more details.

Product information is subject to change without prior notice.

"USB Type-C®" and "USB-C®" are registered trademarks of USB Implementers Forum.

Feature Comparison

Type	Model No.	Max Video Input Resolution	Video Output Resolution	Video Output Format	HDMI Loop-through	Analog Audio Input	Multiplatform Support
Content Creation	UC9040	3840 x 2160	480P60, 720P60, 1080P60	Streaming	Yes	2 x Mic	RTMP / RTMPS
	UC9020	3840 x 2160	480p30, 720p30, 1080p30	Streaming	Yes	1 x Mic, 1 x Line in	RTMP / RTMPS
	UC3020	1920 x 1080	1080p60	UVC	N/A	N/A	Windows / Mac / Android
	UC3021	3840 x 2160	1080p60	UVC	Yes	N/A	Windows / Mac / Android
	UC3022	3840 x 2160	1080p60	UVC	N/A	1 x Mic, 1 x Line in	Windows / Mac / Android

Type	Model No.	Max. Video resolution	Dual Display	Video Interface	Memory Card Slot	USB-C PD	Power Adapter	Multiplatform Support
Docking Stations	UH3230	4096 x 2160	1080p	DisplayPort, HDMI	N/A	•	•	Windows / Mac
	UH3231	3840 x 2160	1080p	DisplayPort x 2	N/A	N/A	N/A	Windows / Mac
	UH3232	3840 x 2400	N/A	HDMI, VGA	N/A	N/A	N/A	Windows / Mac
	UH3238	3840 x 2160	N/A	HDMI	N/A	•	N/A	Windows / Mac / iPad Pro
	UH3233	3840 x 2160	1080p	HDMI x 2	N/A	N/A	N/A	Windows / Mac
	UH3234	3840 x 2160	1080p	DisplayPort, HDMI, VGA	•	•	N/A	Windows / Mac
	UH3235	3840 x 2160	N/A	HDMI	N/A	•	N/A	Windows / Mac / iPad Pro / Switch
	UH3236	3840 x 2160	N/A	HDMI, VGA	N/A	•	N/A	Windows / Mac / iPad Pro
	UH3239	3840 x 2160	N/A	HDMI	•	•	N/A	Windows / Mac / iPad Pro
	UH3237	3840 x 2160	1080p	HDMI x 2, VGA	•	•	N/A	Windows / Mac
	UH7230	5160 x 2880	4K	DisplayPort, Thunderbolt 3	N/A	•	•	Windows / Mac

Type	Model No.	Host	Upstream	Port	Downstream	Power Mode
USB Converters	UC1284B	N/A	USB 2.0	N/A	C-36 Parallel	Bus-powered
	UC2322	1	USB 2.0	2	RS-232 (DB9)	• (Optional)
	UC2324	1	USB 2.0	4	RS-232 (DB9)	• (Optional)
	UC4852	1	USB 2.0	2	RS-485 (DB9)	• (Optional)
	UC4854	1	USB 2.0	4	RS-485 (DB9)	• (Optional)
	UC3238	1	USB-C 3.2 Gen 1	1	HDMI	Bus-powered
	UC3008A1	1	USB-C 3.2 Gen 1	1	HDMI	Bus-powered
	UC3002A	1	USB-C 3.2 Gen 1	1	VGA	Bus-powered
	UC232B	1	USB 2.0	1	RS-232 (RJ-45)	Bus-powered
	UC232A / UC232A1	1	USB 2.0	1	RS-232 (DB9)	Bus-powered
Docking Switches	UC485	1	USB 2.0	1	RS-485 (DB9 / Terminal Block)	Bus-powered
	US7220	2	Thunderbolt 2	11	Thunderbolt 2 / HDMI / USB 3.0 / USB 2.0 / eSATA / Mini TOSLINK Line In / Out, GbE LAN Port	Self-Powered
	US3310	2	USB-C 3.2 Gen 1	3	HDMI, USB 3.2 Gen 1 Type-A	• (Optional)

Type	Model No.	Host	Upstream	Port	Downstream	Power Mode
Sharing Switches	US3342	2	USB-C 3.2 Gen 2	4	USB-C 3.2 Gen 2	• (Optional)
	US3324* / US234	2	USB 3.2 Gen 1	4	USB 3.2 Gen 1 Type-A	• (Optional)
	US3344* / US434	4	USB 3.2 Gen 1	4	USB 3.2 Gen 1 Type-A	• (Optional)
	US3344I	4	USB 3.2 Gen 1	4	USB 3.2 Gen 1 Type-A	Bus-powered
	US224	2	USB 2.0	4	USB 2.0 Type-A	• (Optional)
	US424	4	USB 2.0	4	USB 2.0 Type-A	• (Optional)
	US221A	2	USB 2.0	1	USB 2.0 Type-A	Bus-powered
	US421A	4	USB 2.0	1	USB 2.0 Type-A	Bus-powered
USB Hubs	UH275	1	USB 2.0	4	USB 2.0 Type-A	• (Optional)
	UH284	1	USB 2.0	4	USB 2.0 Type-A	• (Optional)

* Additional USB 3.2 Gen 1 Type-B to Type-C cable included in the US3324 / US3344 package.

Type	Model No.	Distance	Ports	Protocol	Additional Feature	Power Mode
USB Extenders	UE350A	5 m	1	USB 3.2 Gen 1	N/A	Self-Powered
	UE3310	10 m	1	USB 3.2 Gen 1	Cable Lock	Self-Powered
	UE3315A	15 m	1	USB 3.2 Gen 1	Cable Lock	Self-Powered
	UE150	5 m	1	USB 2.0	N/A	Self-Powered
	UE250	5 m	1	USB 2.0	N/A	Self-Powered
	UE2120	12 m	1	USB 2.0	Cable Lock	• (Optional)
	UE2120H	12 m	4	USB 2.0	Hub	• (Optional)
	UCE3250	50 m	4	USB 2.0	Hub	Self-Powered
	UCE60	60 m	1	USB 2.0	N/A	• (Optional)
	UCE260	60 m	1	USB 2.0	N/A	Self-Powered
	UCE32100	100 m	4	USB 2.0	N/A	• (Optional)
	UEH4002A	100 m	4	USB 2.0	Hub	Self-Powered
	UEH4102	>100 m	4	USB 2.0	Hub	Self-Powered

Content Creation



ATEN provides hardware and software that allows the highest quality video to be simple and affordable to every content creator, so that post production and livestreaming can become truly creative.

- **All-in-one AV Mixer**

The powerful all-in-one AV mixer integrates a 1080p video capture, video switch, stream broadcaster, video converter, video splitter, and audio mixer, while the accompanying innovative app enables creators to capture, stream, and switch between video inputs over the internet and instantly take the video production and livestreaming to next level.

- **Video Capture**

ATEN HDMI UVC Video Capture devices allow you to send unencrypted HDMI video to your USB-C or Thunderbolt 3 laptop for video editing or livestreaming with various popular third-party video-editing software/platforms. It's compliant with the latest USB 3.2 Type-C specification and designed to plug & play.

- **Control App**

The ATEN control app turns an iPad into a touch interface for controlling, preview monitoring, real-time editing, and program mixing, and combines with an AV mixer to create an easy-to-use solution for creating pro-level livestreaming content.

Pro-level Live Productions for Different Applications



Churches

Education

Live Events

Meetings and Presentations

StreamLIVE™ PRO (UC9040)

Multi-Channel AV Mixer



Rear



Features

- All-in-one design to simplify streaming workflow—Integrates 1080p video capture, video recorder, video switch, streaming encoder, video converter, video splitter, and audio mixer
- Professional-quality live streaming everywhere – Compatible with every major platform and can livestream to two platforms at the same time from virtually anywhere
- 1080P Recording – Features a media recording that can be used to record a program and save recordings directly to a connected external hard drive or flash drive via USB
- Compact mixer control panel – Switches & mixes between multiple video & audio sources with the help of easily identifiable luminous keys
- Intuitive and powerful app – OnAir™ Pro App presets for up to 8 scenes with custom video layout, preview and full screen program monitoring, real-time editing, transitions in stunning DVE, PiP or PiP visual effects, and graphic and text overlays for a professional finish
- DVE (Digital Video Effect) Video Transitions – Including circle drop, window slice, polka dot, circle open, fade, heart, cross hatch and random square
- Storyboard-like management – quick and smooth transitions control for professional programming during live events
- Audio Management – Multi-channel audio mixing with faders, meters, and balance for every input
- Fanless and optimized thermal air flow system for quiet operation
- Multitask designed handle-stand to enhance portability and ergonomic comfort angle

Livestreaming Made Easier than Ever

Streaming, switching, and recording in a compact box




*iPad not included

Specifications

StreamLIVE™ PRO (UC9040)	
Video Input	
Interfaces	1 x 4K HDMI Type-A Female (up to 2160p60, unencrypted) 3 x HDMI Type-A Female (up to 1080p60, switcher, unencrypted)
Video Output	
Interfaces	1 x 4K Loop-Thru HDMI Type-A Female (up to 2160p60, unencrypted) 1 x PGM HDMI Type-A Female (up to 1080p60, unencrypted)
Video Sampling	4:2:2 8-bit
Color Space	4:2:2 YUV
Video Resolution	<p>HDMI 1 Input: VGA (640 x 480@60), 480p60/50/30/25, SVGA (800 x 600@60), XGA (1024 x 768@60), 720p60/50/30/25, SXGA (1280 x 1024@60), WXGA+ (1440 x 900@60), UXGA (1600 x 1200@60 RB), WUXGA+ (1680 x 1050@60), 1080p60/50/30/25, 2160p60/50/30/25</p> <p>HDMI 2/3/4 Input: VGA (640 x 480@60), 480p60/50/30/25, SVGA (800 x 600@60), XGA (1024 x 768@60), 720p60/50/30/25, SXGA (1280 x 1024@60), WXGA+ (1440 x 900@60), UXGA (1600 x 1200@60 RB), 1080p60/50/30/25</p> <p>SRC/PGM HDMI Output: 480p60/50/30/25, 576p60/50/30/25, 720p60/50/30/25, 1080p60/50/30/25</p> <p>HDMI Loop-Through Output: VGA (640 x 480@60), 480p60/50/30/25, SVGA (800 x 600@60), XGA (1024 x 768@60), 720p60/50/30/25, SXGA (1280 x 1024@60), WXGA+ (1440 x 900@60), UXGA (1600 x 1200@60 RB), WUXGA+ (1680 x 1050@60), 1080p60/50/30/25, 2160p60/50/30/25</p>
Audio Inputs	
Interfaces	HDMI Captured Inputs (Stereo); 2 x 1/4" TRS Jack (Dual Mono)
Audio Outputs	
Interfaces	HDMI Outputs (Stereo); 1x 1/8" TRS Jack (Stereo)
Network Protocol	<p>Dual-stream encoder supports direct live streaming to CDN server over ethernet using Real Time Messaging Protocol (RTMP/RTMPS)</p> <p>Video Encoding Format: H.264 Bit Rate: 512Kbps~10Mbps Color Format: YUV420 Resolution: 1080p30/25, 720p60/50/30/25, 480p60/50/30/25</p> <p>Audio Encoding Format: AAC Sampling Rate: 48kHz Bit Rate: 128kbps</p>
Recording Storage	<p>Max. Video Resolution: 1080p30/25 File Format : MP4 Supported Media: USB 3.x compatible mobile drive (HDD / SSD) or flash drive, at least 32GB of free space</p>
Connection	<p>2x USB 3.1 Gen1 Type-A Female (blue) 1x USB Type-C 1x GbE LAN port</p>
Environmental	
Operating Temperature	0 – 40 °C
Storage Temperature	-20 – 60 °C
Humidity	0 - 80% RH, Non-Condensing
OS Support	<p>• iPad Pro (3rd gen or later) with iOS 11 and later The following iPad with iOS 11 and later (Additional Apple Lightning USB 3 Adapter is required): • iPad Pro (1st and 2nd gen) • iPad (5th gen or later) • iPad Air (3rd gen or later) • iPad Mini (5th gen or later)</p>
Power	
Maximum Input Power Rating	DC12V, 7.5A
Power Consumption	DC12V: 17.37W
Physical Properties	
Housing	Metal
Weight	1.85 kg (4.07 lb)
Housing	28.85 x 18.99 x 9.66 cm (11.36 x 7.48 x 3.8 in.)
Carton Lot	1 pc
Included Accessories	<p>1x USB-A to USB-C Cable (parts no.: LIN6-11B1-C11G); 1x USB-C to USB-C Cable (parts no.: LIN6-22B1-B12G); 1x AC Power Cable</p>

StreamLIVE™ HD (UC9020)

Multi-Channel AV Mixer



Rear



Features

- All-in-one design to simplify streaming workflow – Integrates 1080p video capture, video switch, streaming encoder, video converter, video splitter, and audio mixer
- Professional-quality live streaming to global audiences by any CDN platform, with a low entry threshold, so even entry-level users can quickly get started
- Intuitive app – OnAir™ App for preview and program monitoring, change video layout in Full Screen/PBP/PIP settings, add image and subtitle overlays, and smooth scene transitions for a professional finish
- Storyboard-like management – Presets for up to 8 scenes for later while streaming and during performances to reduce the need to interact with hardware
- Compact mixer control panel – Switches & mixes between multiple video & audio sources with the help of easily identifiable luminous keys
- Fanless and optimized thermal air flow system for quiet operation
- Multitask designed handle-stand to enhance portability and ergonomic comfort angle



Specifications

StreamLIVE™ HD (UC9020)	
Video Inputs	
Interfaces	1 x 4K HDMI Type-A Female (2160p60, unencrypted) 2 x HDMI Type-A Female (unencrypted)
Video Outputs	
Interfaces	1 x 4K Loop-Thru HDMI Type-A Female (2160p60, unencrypted) 1 x PGM HDMI Type-A Female (up to 1080p@60, unencrypted)
Video Sampling	4:2:2 8-bit
Color Space	4:2:2 YUV
Video Resolution	<p>HDMI 1 Input: VGA (640 x 480@60), 480p60/50/30/25, SVGA (800 x 600@60), XGA (1024 x 768@60), 720p60/50/30/25 SXGA (1280 x 1024@60), WXGA+ (1440 x 900@60), UXGA (1600 x 1200@60 RB), WUXGA+ (1680 x 1050@60), 1080p60/50/30/25, 2160p60/50/30/25</p> <p>HDMI 2A/2B Input:* VGA (640 x 480@60), 480p60/50/30/25, SVGA (800 x 600@60), XGA (1024 x 768@60), 720p60/50/30/25, SXGA (1280 x 1024@60), WXGA+ (1440 x 900@60), UXGA (1600 x 1200@60 RB), 1080p60/50/30/25</p> <p>*Only selected port show video, another one show non-video photo or graph.</p> <p>SRG/PGM HDMI Output: 480p60/50/30/25, 576p60/50/30/25, 720p60/50/30/25, 1080p60/50/30/25</p> <p>HDMI Loop-Through Output: VGA (640 x 480@60), 480p60/50/30/25, SVGA (800 x 600@60), XGA(1024 x 768@60), 720p60/50/30/25, SXGA (1280 x 1024@60), WXGA+ (1440 x 900@60), UXGA (1600 x 1200@60 RB), WUXGA+ (1680 x 1050@60), 1080p60/50/30/25, 2160p60/50/30/25</p>
Audio Inputs	HDMI captured inputs (stereo) 1 x Mic input, 1/4" TRS jack (dual mono) 1 x Line input, RCA jack, signal level: -10 dBV
Audio Outputs	HDMI outputs (stereo) 1x Line output, 3.5mm Jack (stereo)
Network Protocol	<p>Multi-Publish to Streaming Server / CDN (RTMP/RTMPS)</p> <p>Video Encoding Format: H.264 Bit rate: 512Kbps~10Mbps Color Format: YUV420 Resolution: 1080p30, 720p30, 480p30</p> <p>Audio Encoding Format: AAC Sampling Rate: 48kHz Bit rate: 128kbps</p>
Recording Storage	<p>Max. video resolution: 1080p30 File format MP4</p> <p>Supported media: USB 3.x compatible flash drive or mobile drive (HDD / SSD), at least 32GB of free space</p>
Connection	1x USB 3.2 Gen1 Type-A Female (Blue) 1x USB2.0 Type-A(White) 1x GbE LAN port
Environmental	
Operating Temperature	0 – 40 °C
Storage Temperature	-20 – 60 °C
Humidity	0 - 80% RH, Non-Condensing
OS Support	<p>The following iPad with iOS 11 or later (Additional Apple Lightning USB 3 Adapter is required):</p> <ul style="list-style-type: none"> • iPad Pro (3rd gen) with iOS 11 or later • iPad Pro (1st gen) • iPad Pro (2nd gen) • iPad (5th gen or later) • iPad Air (3rd gen or later) • iPad Mini (5th gen or later)
Power	
Maximum Input Power Rating	IEC C14, 100-240 Vac (w/250V fuse)
Power Consumption	AC110V: 12.9W; AC220V: 12.7W
Physical Properties	
Housing	Metal
Weight	1.89 kg (4.16 lb)
Dimensions (L x W x H)	28.85 x 18.99 x 9.66 cm (11.36 x 7.48 x 3.8 in.)
Carton Lot	1 pc
Included Accessories	1x USB-A to USB-C Cable (parts no.: LIN6-09B1-C11G); 1x USB-A to USB-A Cable (parts no.: LIN5-04U1-U1HG); 1x AC Power Cable

CAMLIVE™+ (UC3021)

HDMI to USB-C UVC Video Capture with PD3.0 Power Pass-Through



Rear



Features

- Supports unencrypted 4K video input for 1080P capture
- Software free –plug & play designed for PC, Mac and Android platform
- HDMI loop-out –supports real-time HDMI video preview
- Up to 60W power charging capability for laptop or Android phone – supports USB-C PD3.0. Power profile include 5V/9V/15V/20V (additional USB-C power adapter is needed)
- Ideally suited for high-quality live streaming or video editing such as web conference, education, worship, and live events
- Camera mount adapter makes the installation easier and stable
- Compatible with USB & Thunderbolt 3 (USB-C) specification

Next-Level Mobile Streaming

A portable video capture device for mobile and gaming streaming



Specifications

CAMLIVE™+ (UC3021)	
Connectors	
Video In	1 x HDMI Type A Female (Black)
Video Output	1 x HDMI Type A Female (Video Loop-out , Black)
USB Port	USB 3.2 Gen1 Type-C Female (Black) (USB-C to USB-C and USB-C to USB-A Cable package included)
Power (Optional)	1 x USB-C Female Supports Power Delivery 3.0 for laptop charging up to 60W. Power profiles include 5V, 9V, 15V, 20V (Additional USB-C power adapter is needed)* *Supports USB-C PD power adapter only, cannot work with USB-C QC power adapter.
Video Resolution	Video input: 2160p60, 1080p60, 720p60 and 480p60, HDMI support (Unencrypted) Video Loop-out: 2160p60, 1080p60, 720p60 and 480p60, HDMI support (Unencrypted)
Audio Sampling	16-bit PCM audio, 44.1KHz and 48KHz
Output	Uncompressed 1080p60, 720p60 & 480p60 UVC video stream with UAC audio (Uncompressed video stream is only available on USB3.1 connection)
Environmental	
Operating Temperature	0 – 40 °C
Storage Temperature	-20 – 60 °C
Humidity	0 – 80% RH, Non-Condensing
Minimum Hardware Requirements	<p>PC/Mac: CPU: Intel® i3 Dual Core 2.8Ghz or higher RAM: 4GB or more One USB-C interface or USB-A interface</p> <p>Smartphone: Android device with UVC support and USB-C interface*</p> <p>*For detail UVC compatible device list, please refer to following info revealed by third party App. https://www.camerafi.com/supported-devices/</p>
OS Support	Windows 10 and above Mac OS X 10.13 and above Android 5.0.1 and above with UVC support
Physical Properties	
Housing	Plastic
Weight	0.09 kg (0.2 lb)
Dimensions (L x W x H)	11.49 x 8.49 x 2.00 cm (4.52 x 3.34 x 0.79 in.)
Carton Lot	10 pcs
Included Accessories	1x USB-C to USB-A Cable; 1x USB-C to USB-C Cable; 1x Camera Mount Adapter; 1x Warranty Card

CAMLIVE™ PRO (UC3022)

Dual HDMI to USB-C UVC Video Capture



HDMI™
HIGH-DEFINITION MULTIMEDIA INTERFACE



Resolution
1080P

OS Support
Win, Mac, Android



Rear



Features

- Mixes and captures two non-HDCP 4K live videos at 1080P UVC format on PC or mobile device via USB 3.x interface with seamless transition
- Intuitive Android / iOS App control – sets up your camera gear and direct your show from anywhere
- Supports real-time HDMI program video preview
- Easily identifiable chroma keys – can make the video look like you are anywhere by changing the background
- Ideally suited for high-quality live streaming or video editing such as web conference, education, worship, and live events
- Provides audio mixer with additional dual analog audio inputs
- Supports protected video switching mode for regular event usage
- Compatible with USB & Thunderbolt 3 (USB-C) specification



Enhance Your Conferencing Experience

Specifications

CAMLIVE™ PRO (UC3022)	
Connectors	
Video In	2 x HDMI Type A Female (Black)
USB Port	USB 3.x Gen1 Type-B Male (Blue) (USB-B to USB-C and USB-B to USB-A cable are included in the package)
Video Output	1 x HDMI Type A Female (PGM Video, Black)
Audio Inputs	1 x balanced analog audio via XLR connectors 1 x unbalanced audio via RCA connectors.
Video Resolution	Video input: 2160p30/25/24, 1080p60/50/30/25/24, 720p60/50, HDMI support PGM video out: 1080p60/50/30/25/24, 720p60/50, HDMI support (unencrypted) (Support encrypted PGM output at 2160p30/25/24, 1080p60/50/30/25/24, 720p60/50 with UVC capture disabled)
Audio Sampling	16-bit PCM audio, 44.1KHz and 48KHz
Output	720p60 & 1080p60 UVC video stream with UAC audio (Uncompressed video stream is only available on USB 3.x connection)
Minimum Hardware Requirements	PC/Mac: CPU: Intel® i3 Dual Core 2.8Ghz or higher RAM: 4GB or more One USB-C interface or USB-A interface Smartphone*: Android device with UVC support and USB-C interface *For detail UVC compatible device list, please refer to following info revealed by third party App. https://www.camerafi.com/supported-devices/
Connection	Bluetooth Low Energy(BLE) technology
OS Support	Windows 10 and above* Mac OS X 10.13 and above Android 5.x and above or iOS 10.1 and above , with Bluetooth 4.2 or higher supporting Bluetooth Low Energy (BLE) *Window 7 requires driver installation
Power Consumption	DC5V: 4.4W
Environmental	
Operating Temperature	0 – 40 °C
Storage Temperature	-20 – 60 °C
Humidity	0 – 80% RH, Non-Condensing
Physical Properties	
Housing	Metal
Weight	0.68 kg (1.5 lb)
Dimensions (L x W x H)	13.00 x 15.18 x 4.25 cm (5.12 x 5.98 x 1.67 in.)
Carton Lot	5 pcs
Included Accessories	1x USB-B to USB-C Cable; 1x USB-B to USB-A Cable; 1x Power Adapter

CAMLIVE™ (UC3020)

HDMI to USB-C UVC Video Capture



OS Support
Win, Mac, Android

USB-C

1080P
Capture



Features

- Captures unencrypted HDMI video signal from camcorder or DSLR up to 1080p @ 60*
- Supports live video streaming, webcasting and video conferencing
- Compatible with popular streaming software, such as OBS, Xsplit, YouTube, Facebook and Twitch
- Ideally suited for high-quality live streaming or video editing such as web conference, education, worship, and live events
- Plug and Play – supports UVC/UAC v1.1
- Compatible with USB 3.2 Gen 1 Type-C standard
- Works with all major operating systems: Windows®, OS X® and Android®

*CAMLIVE™ cannot display or capture HDCP protected content

Specifications




	CAMLIVE™ (UC3020)
Connectors	
Video In	1 x HDMI Type A Female (Black)
USB Port	USB 3.1 Gen1 Type-C Male (White) (USB-C to USB-A adapter package included, Black)
Video Resolution	Video input: 1080p60, 720p60, 480p60, HDMI support (unencrypted)
Audio Sampling	16-bit PCM audio, 44.1KHz and 48KHz
Output	Uncompressed 1080p, 720p60 and 480p60 UVC video stream with UAC audio (Uncompressed video stream is only available on USB3.1 connection)
Power Consumption	DC5V:1.5W
Minimum Hardware Requirements	PC/Mac: CPU: Intel® i3 Dual Core 2.8Ghz or higher RAM: 4GB or more One USB-C interface or USB-A interface Smartphone: Android device with UVC support and USB-C interface* *Latest UC3020 FW upgrade for smartphone support is required. For detail UVC compatible device list, please refer to following info revealed by third party App. https://www.camerafi.com/supported-devices/
OS Support	Windows 10 and above* Mac OS X 10.13 and above Android 5.0.1 and above with UVC support *Window 7 requires driver installation
Environmental	
Operating Temperature	0 – 40 °C
Storage Temperature	-20 – 60 °C
Humidity	0 – 80% RH, Non-Condensing
Physical Properties	
Housing	Aluminum
Weight	0.04 kg (0.09 lb)
Dimensions (L x W x H)	4.20 x 7.30 x 1.40 cm (1.65 x 2.87 x 0.55 in.)
Carton Lot	10 pcs
Included Accessories	1x USB-C to USB-A Adapter

Docking Stations




ATEN provides a full range of docking stations that are designed to expand connectivity and create simplified and productive workspaces for any desktop environment. Whatever your desktop needs, ATEN has the best docking stations for any budget. Enjoy the stations's ergonomic design while boosting productivity and charging your laptop at the same time.

To utilize the full power of your docking station, we suggest your laptop meets the following system requirements:

Windows USB-C enabled Laptop			Multiplatform Support
<ol style="list-style-type: none"> 1. Windows® 10 (32-bit / 64-bit) and above. 2. Intel 7th-Generation Core Processor and above. 3. For video output to work through a USB-C port, it must support DP Alt Mode. <p>To identify the right products, look for the below logos.</p>			<ol style="list-style-type: none"> 1. MacBook 2015 and later 2. MacBook Pro 2016 and later 3. Mac OS X 10.12 and above
<ul style="list-style-type: none"> • SuperSpeed USB Trident Logo + DisplayPort Logo 	<ul style="list-style-type: none"> • SuperSpeed USB Power Delivery Trident Logo + DisplayPort Logo 	<ul style="list-style-type: none"> • SuperSpeed USB 10 Gbps Power Delivery Trident Logo + DisplayPort Logo 	
			

Docking Station Selection Map

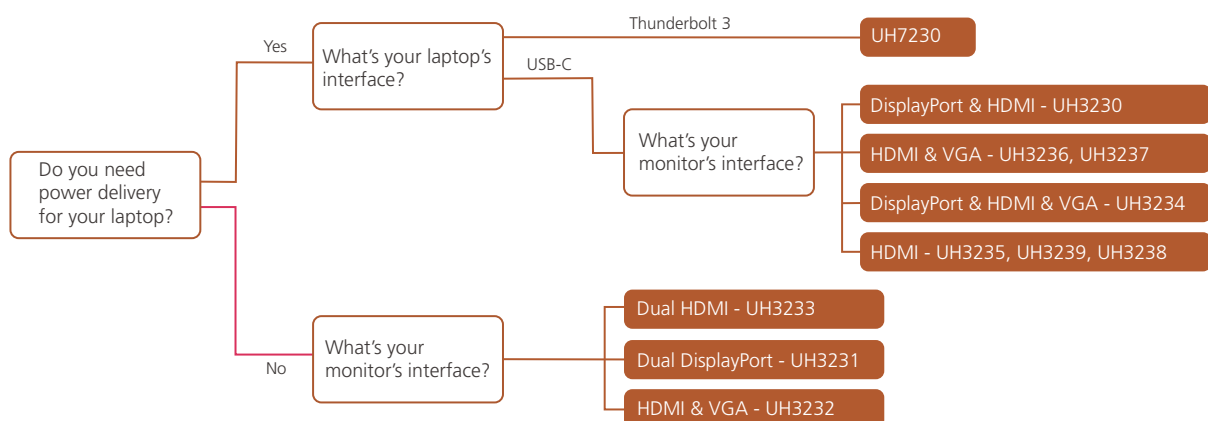

UH3239

USB-C Multiport Mini Dock with Power Pass-Through



OS Support
Win, Mac, iPad Pro

USB 3.2
Gen 1

Power
Pass-Thru

PD2.0



Features

- 6-in-1 Multi-function Dock – includes an HDMI, SD/Micro SD card reader, USB-C PD port and two USB 3.2 Gen1 Type-A ports
- Supports USB Power Delivery 2.0 for laptop charging up to 60W via USB-C PD power adapter - power profiles include 5V, 12V, 15V, 20V
- Supports up to 4K resolution – up to 3840 x 2160 @ 30Hz for superior video output
- Plug and Play – no drivers needed
- Works with all major operating systems: Windows®, OS X® and iPad Pro® (USB-C)
- Compatible with Thunderbolt 3 (USB-C)

Specifications

	UH3239
Computer Connections	1
Cable Length	55cm
Connectors	
Computer	USB 3.2 Gen1 Type-C Male Cable
Device	2 x USB 3.2 Gen 1 Type-A Female (Blue)
Power	1 x USB Type-C Female (supports USB 3.2 Gen1 Type-C Port data transfer) Supports Power Delivery 2.0 for laptop charging up to 60W. Power profiles include 5V, 12V, 15V, 20V (additional USB-C power adapter is needed)
Video Output	1 x HDMI Female (Black)
Performance	
Flash Memory	Supports SD V1.0/ V1.1/ V2.0/ V3.01 and V5.0 SD (Capacity up to 2GB) SDHC (Capacity up to 32GB) SDXC (Capacity up to 2TB)
Video Resolution	3840 x 2160@30Hz
Power Consumption	DC5V: 15W
System Requirements	<p>Windows USB-C enabled computer:</p> <ul style="list-style-type: none"> - Windows® 10 (32-bit / 64-bit) and above - With Intel 7th-Generation Core Processor (Kaby -Lake with HD 6XX series integrated graphics) and above. - For video output to work through a USB-C port, it must support DP Alt Mode. <p>Mac USB-C enabled computer:</p> <ul style="list-style-type: none"> - MacBook 2015 and later - MacBook Pro 2016 and later - Mac OS X 10.12 and above
Environmental	
Operating Temperature	0 – 40°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-Condensing
Physical Properties	
Housing	Aluminum
Weight	0.08 kgs
Dimensions (L x W x H)	13.30 x 3.60 x 1.10 cm
Carton Lot	20 pcs

UH3238

USB-C Travel Dock with Power Pass-Through



OS Support
Win, Mac, iPad Pro

USB 3.2
Gen 1

Power
Pass-Thru

PD3.0



Features

- 5-in-1 Travel Dock – includes an HDMI port, Audio Jack, USB-C port and two USB 3.2 Gen 1 Type-A ports
- Supports USB Power Delivery 3.0 for charging up to 92W via USB-C PD power adapter - power profiles include 5V, 9V, 15V, 20V
- Supports DP1.4 Alt mode with up to 4K (3840 x 2160) @60Hz resolution for superior video output
- Compact Design
- Plug and Play – no drivers needed
- Works with all major operating systems: Windows®, OS X®, and iPad Pro® (USB-C)
- Compatible with Thunderbolt 3 (USB-C)

Specifications

	UH3238
Computer Connections	1
Connectors	
Computer	USB 3.2 Gen 1 Type-C
Device	2 x USB 3.2 Gen 1 Type-A Female (Blue)* 1 x USB 3.2 Gen 1 Type-A Female (Black)* *a. 1 x USB 3.2 Gen 1 Type-A supports BC 1.2 (5V, 7.5W) *b. 1 x USB 3.2 Gen 1 Type-A supports 5V, 4.5W *c. The total output of 2 x USB-A ports is max. 5V, 9W *d. 1 x USB 3.2 Gen 1 Type-C supports 5V, 7.5W *e. The total output of 3 x USB (2A+1C) ports is max. 5V, 7.5W
Video Output	1 x HDMI Female (Black)
Audio	1 x 3.5mm stereo 4-pole microphone and headphone jack
Power	1 x USB Type-C Female (support USB 3.2 Gen 1 Data transfer)* *Supports Power Delivery 3.0 for laptop charging up to 92W. Power profiles include 5V, 9V, 15V, 20V (additional USB-C power adapter is needed)
Video Resolution	3840 x 2160@60Hz* *When connecting a DP1.2 Alt mode supported upstream, the max resolution of HDMI is 4K@30Hz due to bandwidth limitation
Power Consumption	DC5V: 8W
System Requirements	<ul style="list-style-type: none"> • Windows 10 and above, USB-C enabled computer with DP Alt Mode* *With Intel 7th-Generation Core Processor (Kaby-Lake) and above. More info about CPU generation, please find: https://www.intel.com/content/www/us/en/processors/processor-numbers.html • Mac OS X 10.12 and above, USB-C enabled computer • iOS 12.1 and above, iPad Pro 3rd generation (2018)*** ***For better HID experience, iPadOS 13 and above is recommended.
Environmental	
Operating Temperature	0 – 40°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Aluminum
Weight	0.04 kgs
Dimensions (L x W x H)	9.00 x 3.20 x 0.82 cm
Carton Lot	20 pcs

UH3235
USB-C 4K Ultra Mini Dock with Power Pass-Through



OS Support
Win, Mac,
iPad Pro, Android

USB 3.2
Gen 1

Power
Pass-Thru

PD2.0



- Features**
- A multifunctional USB-C mini dock for laptop, smartphone and USB-C game console
 - Supports USB Power Delivery 2.0 for charging up to 60W (additional USB-C PD power adapter is needed)
 - Supports 4K resolutions – up to 3840 x 2160 @ 30Hz
 - Supports Samsung DeX mode or Huawei Desktop mode
 - Lightweight and card case-sized design – stylish and ultra mini design for easy carrying
 - Compatible with Thunderbolt 3 (USB-C)

Specifications

	UH3235
Computer Connections	1
Cable Length	50 cm
Connectors	
Computer	1 x USB-C Female (Black)
Device	1 x USB 2.0 Type-A Female (Black)* 1 x USB 3.2 Gen 1 Type-A Female (Blue)** *Supports max. 5V, 0.3A output **Supports max. 5V, 0.7A output
Video Output	1 x HDMI Female (Black)
Power	1 x USB-C DC-in Female* *Supports Power Delivery 2.0 for charging up to 60W. Power profiles include 5V, 9V, 15V, 20V (Additional USB-C PD power adapter is needed) *For mobile device charging, a Limited Power Source (LPS) certified USB-C PD Power Adapter over 25 Watt is recommended.
Video Resolution	3840 x 2160 @ 30Hz
Power Consumption	DC5V: 7.5W
System Requirements	<ul style="list-style-type: none">• Windows 10 and above, USB-C enabled computer with DP Alt Mode* *With Intel 7th-Generation Core Processor (Kaby-Lake) and above. More info about CPU generation, please find: https://www.intel.com/content/www/us/en/processors/processor-numbers.html <ul style="list-style-type: none">• Mac OS X 10.12 and above, USB-C enabled computer• Android 8.0 and later, USB-C enabled Smartphone with DP Alt Mode** **Only Samsung and Huawei support PC-like operation, others only support mirror mode. For a list of supporting mobile device, refer to UH3235's user manual. <ul style="list-style-type: none">• iOS 12.1 and above, iPad Pro 3rd generation (2018)*** ***For better HID experience, iPadOS 13 and above is recommended.
Environmental	
Operating Temperature	0 – 40°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-Condensing
Physical Properties	
Housing	Plastic
Weight	0.05 kg (0.11 lb)
Dimensions (L x W x H)	9.30 x 7.00 x 1.50 cm (3.66 x 2.76 x 0.59 in.)
Carton Lot	20 pcs
Included Accessories	1x USB-C Cable

UH3236

USB-C Multiport Mini Dock with Power Pass-Through



PD3.0



Features

- Connects up to 5 devices to a laptop through a single USB-C cable
- Supports 4K HDMI (3840 x 2160 @ 30Hz) resolutions or VGA (1920 x 1200 @ 60Hz) resolutions
- Supports USB Power Delivery 3.0 for laptop charging up to 60W via USB-C power adapter – power profiles include 5V, 9V, 12V, 15V, 20V
- Gigabit Ethernet port
- Plug and Play – no drivers needed
- Works with all major operating systems: Windows®, OS X®, and iPad Pro® (USB-C)
- Compatible with Thunderbolt 3 (USB-C)

Specifications

	UH3236
Computer Connections	1
Cable Length	35 cm
Connectors	
Computer	1 x USB-C Male (Black)
Device	1 x USB 2.0 Type-A Female (Black) 1 x USB 3.2 Gen 1 Type-A Female (Blue)
Video Output	1 x HDMI Female (Black) 1 x VGA Female (Black)
LAN Ports	1 x Gigabit Ethernet Female (Black)
Power	1 x USB-C Female Supports Power Delivery 3.0 for laptop charging up to 60W. Power profiles include 5V, 9V, 12V, 15V, 20V (Additional USB-C power adapter is needed)* *Supports USB-C PD power adapter only, cannot work with USB-C QC power adapter. The total charging time may vary depending on the spec of USB-C power adapter connected to the UH3236.
Power Consumption	DC5V: 12.5W
System Requirements	<ul style="list-style-type: none">• Windows 10 and above, USB-C enabled computer with DP Alt Mode* *With Intel 7th-Generation Core Processor (Kaby-Lake) and above. More info about CPU generation, please find: https://www.intel.com/content/www/us/en/processors/processor-numbers.html <ul style="list-style-type: none">• Mac OS X 10.12 and above, USB-C enabled computer• Android 8.0 and later, USB-C enabled Smartphone with DP Alt Mode** **Only Samsung and Huawei support PC-like operation, others only support mirror mode. For a list of supporting mobile device, refer to UH3235's user manual. <ul style="list-style-type: none">• iOS 12.1 and above, iPad Pro 3rd generation (2018)*** ***For better HID experience, iPadOS 13 and above is recommended.
Video Resolution	Single View: HDMI - 3840 x 2160 @ 30 or VGA - 1920 x 1200 @ 60
Environmental	
Operating Temperature	0 – 40°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Weight	0.08 kg (0.18 lb)
Dimensions (L x W x H)	14.00 x 5.50 x 1.60 cm (5.51 x 2.17 x 0.63 in.)
Carton Lot	20 pcs

UH3234

USB-C Multiport Dock with Power Pass-Through



HDMI™
HIGH-DEFINITION MULTIMEDIA INTERFACE

OS Support
Win, Mac, iPad Pro

USB
USB 3.2
Gen 1

DisplayPort

DP HDMI
Dual
View

Power
Pass-Thru

PD2.0

Fits 13"
laptops



Features

- Extends up to 10 devices through a single USB-C cable
- Supports single display output up to 4K @ 30Hz (3840 x 2160 @ 30Hz) or dual display output up to 1080P (1920 x 1080 @ 60Hz)
- Supports USB Power Delivery 2.0 (PD2.0) for laptop charging up to 60W via USB-C power adapter – power profile include 5V, 9V, 12V, 20V
- Enhanced EMI protection by increasing the cable braid density and adding conductive foam
- Stylish and ultra slim design allows user to place the 13" laptop directly on the top of docking station and save space on desk*
- The rear feet of 12" MacBook fit right into the mounting pits on UH3234
- Compatible with Thunderbolt 3 (USB-C)

*Fits 13" laptops with a USB-C port on the left side.



10

Thunderbolt & USB

Specifications

	UH3234
Computer Connections	1
Connectors	
Computer	1 x USB-C Male
Device	1 x USB 3.2 Gen 1 Type-A Female with BC1.2 (Blue)* 2 x USB 3.2 Gen 1 Type-A Female (Blue)* *The total output of 3 x USB 3.2 Gen 1 Type-A Female is 10W (5V/2A).
Video Output	1 x DisplayPort Female 1 x HDMI Female 1 x VGA Female
LAN Ports	1 x Gigabit Ethernet Female
Audio	1 x 3.5mm Stereo 4-pole microphone and headphone jack
Power	1 x USB-C DC-in Female* *Supports USB Power Delivery 2.0 for charging up to 60W. Power profiles includes 5V, 9V, 12V, and 20V (additional USB-C PD power adapter is needed). *The minimum system power requirement for basic USB functions and video output should be at least 5V, 15W. *For device charging, a Limited Power Source (LPS) certified USB-C PD power adapter over 65 Watt is recommended. *The first 15W will supply the UH3234, and the balance power will supply to the laptop.
Power Consumption	DC5V: 15W
System Requirements	<ul style="list-style-type: none"> • Windows 10 and above, USB-C enabled computer with DP Alt Mode* *With Intel 7th-Generation Core Processor (Kaby-Lake) and above. More info about CPU generation, please find: https://www.intel.com/content/www/us/en/processors/processor-numbers.html <ul style="list-style-type: none"> • Mac OS X 10.12 and above, USB-C enabled computer • iOS 12.1 and above, iPad Pro 3rd generation (2018)** **For better HID experience, iPadOS 13 and above is recommended.
Performance	
Flash Memory	1 x SD/SDHC/SDXC card slot 1 x Micro SD/SDHC/SDXC (up to 128 GB) card slot* *SD and Micro SD Card cannot be used at the same time; functionality accords to the order of insertion.
Video Resolution	Single View: DisplayPort – 3840 x 2160 @ 30 HDMI – 3840 x 2160 @ 30 VGA – 1920 x 1200 @ 60 Dual View*: DisplayPort / HDMI – 1920 x 1080 @ 60 DisplayPort / VGA – 1920 x 1080 @ 60 *For Dual-View to work, a computer's graphics card must support MST technology. Mac computers and iPad Pro only support a single-view output.
Environmental	
Operating Temperature	0 – 40°C
Storage Temperature	-10 – 70°C
Humidity	10 – 90% relative humidity, non-condensing
Physical Properties	
Housing	Aluminum
Weight	0.32 kg (0.7 lb)
Dimensions (L x W x H)	28.00 x 7.50 x 1.45 cm (11.02 x 2.95 x 0.57 in.)
Carton Lot	10 pcs

UH3237

USB-C Multiport Dock with Power Pass-Through



HDMI™
HIGH-DEFINITION MULTIMEDIA INTERFACE

OS Support
Win, Mac, iPad Pro

USB
USB 3.2
Gen 1

Dual View
1080P

Power
Pass-Thru

PD3.0

Fits 15"
laptops



Features

- Expands up to 13 devices through a single USB-C cable
- Supports single display output up to 4K @ 30Hz (3840 x 2160 @ 30Hz) or dual display output up to 1080P (1920 x 1080 @ 60Hz)
- Supports USB Power Delivery 3.0 (PD3.0) for laptop charging up to 85W via USB-C power adapter - power profile include 5V, 9V, 12V, 15V, 20V
- Stylish and ultra slim design allows user to place the 15" laptop directly on the top of docking station and save more space on desk*
- Enhanced EMI protection by increasing the cable braid density and adding conductive foam
- Compatible with Thunderbolt 3 (USB-C)

*Fits 13"~15" laptops with a USB-C port on the left side.



10

Thunderbolt & USB

Specifications

	UH3237
Computer Connections	1
Connectors	
Computer	30 cm USB 3.2 Gen 1 Type-C tethered cable
Device	2 x USB 2.0 Type-A Female (Black)* 3 x USB 3.2 Gen 1 Type-A Female (Blue)* 1 x USB 3.2 Gen 1 Type-C Female (Data Only)* *The total output of 6 USB Ports is max. 5V, 10W.
Video Output	2 x HDMI Female 1 x VGA Female
LAN Ports	1 x Gigabit Ethernet Female (Black)
Audio	1 x 3.5mm Stereo 4-pole microphone and headphone jack
Power	1 x USB Type-C Female* *Supports USB Power Delivery 3.0 for charging up to 85W. Power profiles includes 5V, 9V, 12V, and 20V (additional USB-C PD power adapter is needed). *The minimum system power requirement for basic USB functions and video output should be at least 5V, 15W. *For device charging, a Limited Power Source (LPS) certified USB-C PD power adapter over 65 Watt is recommended. *The first 15W will supply the UH3237, and the balance power will supply to the laptop.
Power Consumption	DC5V: 15W
System Requirements	• Windows 10 and above, USB-C enabled computer with DP Alt Mode* *With Intel 7th-Generation Core Processor (Kaby-Lake) and above. More info about CPU generation, please find: https://www.intel.com/content/www/us/en/processors/processor-numbers.html • Mac OS X 10.12 and above, USB-C enabled computer • iOS 12.1 and above, iPad Pro 3rd generation (2018)** **For better HID experience, iPadOS 13 and above is recommended.
Performance	
Flash Memory	1 x SD Card Slot (SD/SDHC/SDXC) 1 x Micro SD Card Slot (Micro SD/SDHC/SDXC up to 128G)* *SD and Micro SD Card cannot be used at the same time; functionality accords to the order of insertion.
Video Resolution	Single View: HDMI – 3840 x 2160 @ 30 or VGA – 1920 x 1080 @ 60 Dual View*: 2 x HDMI – 1920 x 1080 @ 60 *For Dual-View to work, a computer's graphics card must support MST technology. Mac computers and iPad Pro only support a single-view output.
Environmental	
Operating Temperature	0 – 40°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Top Cover – Aluminum Bottom Panel – Plastic
Weight	0.37 kg
Dimensions (L x W x H)	35.03 x 7.50 x 1.48 cm
Carton Lot	10 pcs

UH3230

USB-C Multiport Dock with Power Charging



OS Support
Win, Mac, iPad Pro

USB 3.2
Gen 1

DisplayPort

Quick
Power
Charge

Dual View
1080P

PD2.0



Rear



Features

- Connects up to 8 devices to a laptop through a single USB-C cable
- Supports HDMI with 4K (UHD) resolutions
- Supports DisplayPort 1.2 with 4K (UHD) resolutions
- Analog audio line-in and line-out
- Gigabit LAN port
- Supports dual monitors in mirror and extended mode
- USB 3.2 Gen 1 front panel port supports Fast-Charging
- Supports 60W USB Power Delivery 2.0 for charging a laptop via USB-C port; supported power profiles include 20V/3A, 20V/1.8A, 12V/3A, and 5V/3A
- Works with all major operating systems: Windows®, OS X®, and iPad Pro® (USB-C)
- Compatible with Thunderbolt 3 (USB-C)

Specifications

	UH3230
Computer Connections	1
Connectors	
Device	1 x USB-C Female (Black, Data only) 3 x USB 3.2 Gen 1 Type-A Female (Blue)
Computer	1 x USB-C Female (Black)
Video Output	1 x DisplayPort Female (Black) 1 x HDMI Female (Black)
LAN Ports	1 x Gigabit Ethernet Female (Black)
Audio Inputs	1 x 3.5mm Stereo audio Input (Black)
Audio Outputs	1 x 3.5mm Stereo audio Output (Black)
Power Jack	1
LEDs	
Power	1 (White)
Video Resolution	<p>Single View: DisplayPort – 3840 x 2160 @ 30* or HDMI – 4096 x 2160 @ 30</p> <p>Dual View*: DisplayPort – 2048 x 1200 @ 60* and HDMI – 1920 x 1200 @ 60</p> <p>*The UH3230 supports DP++ standard for using optional active / passive video adapter to convert DP signals to DVI/HDMI. For Dual-View to work, a computer's graphics card must support MST technology. Mac computers and iPad Pro only support a single-view output.</p>
Power Consumption	DC20V: 90W
System Requirements	<p>• Windows 10 and above, USB-C enabled computer with DP Alt Mode*</p> <p>*With Intel 7th-Generation Core Processor (Kaby-Lake) and above. More info about CPU generation, please find: https://www.intel.com/content/www/us/en/processors/processor-numbers.html</p> <p>• Mac OS X 10.12 and above, USB-C enabled computer</p> <p>• iOS 12.1 and above, iPad Pro 3rd generation (2018)**</p> <p>**For better HID experience, iPadOS 13 and above is recommended.</p>
Environmental	
Operating Temperature	0 – 40°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Metal
Weight	0.56 kg (1.24 lb)
Dimensions (L x W x H)	20.00 x 9.07 x 2.15 cm (7.87 x 3.57 x 0.85 in.)
Carton Lot	6 pcs
Included Accessories	1x AC Power Adapter with Cable; 1x USB-C Cable

UH3231

USB-C Dual-DisplayPort Mini Dock



Rear

Features


- Connects a computer to two DisplayPort monitors with Dual-View output
- Supports 4K (UHD) resolutions via single display output
- Supports dual-display video output up to 1920 x 1080 simultaneously
- USB 3.2 Gen1 port with data transfer rates up to 5 Gbps
- Supports variety of video converters via Dual mode DisplayPort standard
- Plug and Play – no drivers or external power adapter needed
- Works with all major operating systems: Windows®, OS X®, and iPad Pro® (USB-C)
- Compatible with Thunderbolt 3 (USB-C)

Specifications

	UH3231
Computer Connections	1
Connectors	
Computer	1 x USB-C Female (Black)
Device	1 x USB 3.2 Gen 1 Type-A Female (Blue)
Video Output	2 x DisplayPort Female (Black)
LEDs	
Power	1 (Blue / Orange)
Video Resolution	Single-View: DisplayPort – 3840 x 2160 @ 30* Dual-View: DisplayPort – 1920 x 1080 @ 60* *The UH3230 supports DP++ standard for using optional active / passive video adapter to convert DP signals to DVI / HDMI. Mac computers and iPad Pro only support a single-view output.
Power	
Power Mode	Bus-Powered
Consumption	DC5V: 0.81W
System Requirements	• Windows 10 and above, USB-C enabled computer with DP Alt Mode* *With Intel 7th-Generation Core Processor (Kaby-Lake) and above. More info about CPU generation, please find: https://www.intel.com/content/www/us/en/processors/processor-numbers.html • Mac OS X 10.12 and above, USB-C enabled computer • iOS 12.1 and above, iPad Pro 3rd generation (2018)** **For better HID experience, iPadOS 13 and above is recommended.
Environmental	
Operating Temperature	0 – 40°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Weight	0.10 kg (0.22 lb)
Dimensions (L x W x H)	9.37 x 9.30 x 2.68 cm (3.69 x 3.66 x 1.06 in.)
Carton Lot	20 pcs
Included Accessories	1x USB-C to USB-C Cable

UH3232

USB-C Multiport Mini Dock



Front



Features

- Connects a USB-C or Thunderbolt™ 3 computer to an HDMI/VGA, Ethernet and USB Type-A port via single cable
- USB 3.2 Gen 1 port with data transfer rates up to 5 Gbps
- Gigabit Ethernet LAN port
- Supports HDMI with 4K (3840 x 2160 @ 30 Hz) resolutions; or VGA with 2K (2048 x 1152 @ 60 Hz) resolutions
- Works with all major operating systems: Windows®, OS X®, and iPad Pro® (USB-C)
- Lightweight design – for easy transport
- Compatible with Thunderbolt 3 (USB-C)

Specifications

	UH3232
Computer Connections	1
Connectors	
Computer	1 x USB-C Male (Black)
Device	1 x USB 3.2 Gen 1 Type-A Female (Blue)
Video Output	1 x HDMI Female (Black) 1 x VGA Female (Black)
LAN Ports	1 x Gigabit Ethernet Female (Black)
Video Resolution	Single View: VGA – 2048 x 1152 @ 60 or HDMI – 3840 x 2160 @ 30
Power	
Power Mode	Bus-Powered
Consumption	DC5V: 7.87W
System Requirements	<ul style="list-style-type: none"> • Windows 10 and above, USB-C enabled computer with DP Alt Mode* <p>*With Intel 7th-Generation Core Processor (Kaby-Lake) and above. More info about CPU generation, please find: https://www.intel.com/content/www/us/en/processors/processor-numbers.html</p> <ul style="list-style-type: none"> • Mac OS X 10.12 and above, USB-C enabled computer • iOS 12.1 and above, iPad Pro 3rd generation (2018)** <p>**For better HID experience, iPadOS 13 and above is recommended.</p>
Environmental	
Operating Temperature	0 – 40°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Weight	0.07 kg (0.15 lb)
Dimensions (L x W x H)	15.88 x 10.80 x 1.52 cm (6.25 x 4.25 x 0.60 in.)
Carton Lot	20 pcs

UH3233

USB-C Dual-HDMI Mini Dock



Rear



Features


- Connects a USB-C computer to two HDMI monitors with Dual-View output
- Supports 4K (UHD) resolutions via single display output
- Supports dual-display video output up to 1920 x 1080 simultaneously
- USB 3.2 Gen1 port with data transfer rates up to 5 Gbps
- Plug and Play – no drivers or external power adapter needed
- Works with all major operating systems: Windows®, OS X®, and iPad Pro® (USB-C)
- Compatible with Thunderbolt 3 (USB-C)

Specifications

	UH3233
Computer Connections	1
Connectors	
Computer	1 x USB-C Female (Black)
Device	1 x USB 3.2 Gen 1 Type-A Female (Blue)
Video Output	2 x HDMI Female (Black)
LEDs	
Power	1 (Blue / Orange)
Video Resolution	Single View: HDMI – 3840 x 2160 @ 30 Dual View*: HDMI – 1920 x 1080 @ 60 *For Dual-View to work, a computers graphics card must support MST technology. Mac computers and iPad Pro only support single-view output.
Power	
Power Mode	Bus-Powered
Consumption	DC5V: 2W
System Requirements	<ul style="list-style-type: none">• Windows 10 and above, USB-C enabled computer with DP Alt Mode* *With Intel 7th-Generation Core Processor (Kaby-Lake) and above. More info about CPU generation, please find: https://www.intel.com/content/www/us/en/processors/processor-numbers.html <ul style="list-style-type: none">• Mac OS X 10.12 and above, USB-C enabled computer• iOS 12.1 and above, iPad Pro 3rd generation (2018)** **For better HID experience, iPadOS 13 and above is recommended.
Environmental	
Operating Temperature	0 – 40°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Weight	0.10 kg (0.22 lb)
Dimensions (L x W x H)	9.37 x 9.30 x 2.68 cm (3.69 x 3.66 x 1.06 in.)
Carton Lot	20 pcs
Included Accessorie	1x USB-C to USB-C Cable

UH7230

Thunderbolt™ 3 Multiport Dock with Power Charging



Rear



Features

- Supports both Thunderbolt 3 (40Gbps) and USB 3.2 Gen 2 (10Gbps) protocol through a single Thunderbolt 3 cable
- Connects up to 8 devices to a laptop via a single Thunderbolt 3 cable / can daisy-chain 5 additional Thunderbolt devices
- Supports 5K resolution on a single Thunderbolt 3 display or dual 4K resolution on one DisplayPort display and one USB-C / Thunderbolt 3 display
- 85W Universal Power Delivery for charging a Thunderbolt 3 laptop or MacBook pro ; supports 20V/4.25A, 15V/3A, 9V/3A and 5V/3A power specification for the output power
- Compatible with legacy Thunderbolt devices via adapter
- Gigabit Ethernet port
- Audio line-in and line-out
- OS Support: Windows 10 32/64 bit, and OS X Sierra 10.12 later

Specifications

	UH7230
Computer Connections	1 x Thunderbolt Computer
Device Connections	
Direct	1
Maximum	5 Max. (via Thunderbolt Daisy-chaining)
Connectors	
Computer	1 x Thunderbolt 3 (USB-C) Female (Black)
Device	1 x Thunderbolt 3 (USB-C) Female (Black); 2 x USB 3.2 Gen1 Type-A Female (Blue); 1 x USB 3.2 Gen1 Type-C Female (Black, data only)
LAN Ports	1 x Gigabit Ethernet Female (Black)
Audio Inputs	1 x 3.5mm Stereo Input Female (Black)
Audio Outputs	1 x 3.5mm Stereo Output Female (Black)
Power Jack	1
Video Output	1x DisplayPort Female; 1x Thunderbolt 3 (USB-C) Female
Video Resolution	Single View: Thunderbolt 3 (USB-C) Monitor – 5K @ 60; USB-C Monitor – 4096 x 2160 @ 60; DisplayPort Monitor – 4096 x 2160 @ 60 Dual View: Thunderbolt 3 (USB-C) Monitor or USB-C Monitor – 4096 x 2160 @ 60; DisplayPort Monitor – 4096 x 2160 @ 60
Power	
Power Mode	Self-Powered
Consumption	DC20V: 170W
System Requirement	<ul style="list-style-type: none"> • Windows 10 and above, Thunderbolt 3 (USB-C) enabled computer • Mac OS X 10.12 and above, Thunderbolt 3 (USB-C) enabled computer
Environmental	
Operating Temperature	0 – 40°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Aluminum
Weight	0.37 kg (0.83 lb)
Dimensions (L x W x H)	22.20 x 8.20 x 2.60 cm (8.74 x 3.23 x 1.02 in.)
Carton Lot	3 pcs
Included Accessorie	1x Thunderbolt 3 USB-C Cable; 1x AC Power Adapter with Cable

Docking Switches



The ATEN Thunderbolt 2.0 / USB-C docking switch is a docking station with sharing switch functionality designed to expand connectivity and share displays and USB devices between different laptops, iPad Pro, or even smartphones, allowing the use of one set of display, keyboard, and mouse to seamlessly control two systems and save desk space.

- **Ultra High Speed**

Supports data transfer rate up to 20Gbps for next-gen versatility.

- **Dual 4K Display Sharing**

Dual 4K output via Thunderbolt™ and HDMI ports for an unrestricted multimedia experience.

- **Key Switch**

With the press of a button on the remote port selector, two computers can share peripherals connected to the docking switch.

- **2-sec Speedy Switch**

Exclusive ATEN technology that eliminates lag and resolution issues, switching between two systems only take two seconds, making workflow more efficient.

- **Power Delivery 3.0 Pass-Through**

The power delivery 3.0 pass-through charges phone and laptop simultaneously and also provides enough power for power-hungry devices such as external hard drives or gaming devices.


- **DeX mode Support**

With smartphone compatibility, the docking switch can dock with a smartphone to build a workstation with an external display in Samsung DeX mode for multitasking.

Note: The features highlighted above are not available in all products. Please refer to each product page for more details. Product information is subject to change without prior notice.

US3310

2-Port USB-C Gen 1 Dock Switch with Power Pass-through



Features

- Allows a USB-C laptop and an Android Smartphone to share one HDMI monitor and all connected USB peripherals
- Provides USB Power Delivery 3.0 for laptop charging up to 85W (additional USB-C Power Adapter is needed)
- Supports 4K resolutions – up to 3840 x 2160 @ 30Hz
- Supports Samsung DeX mode or Huawei Desktop mode
- Video DynaSync™ – allows EDID and HDCP monitors and computers to function flawlessly, and provides fast switching such as continuous real-time switching
- Switches device via remote port selector by pressing a button
- Plug and play – no drivers or external power adapter needed
- Multiplatform support – Windows, Mac, Android & iPad Pro (2018)
- Compatible with Thunderbolt 3 (USB-C)

Specifications

	US3310
Computer Connections	2
Connectors	
Computer	USB 3.2 Gen 1 Type-C Port 1 (Laptop); USB 3.2 Gen 1 Type-C Port 2 (Android : Samsung Dex or Huawei Desktop mode)
Device	2 x USB 3.2 Gen 1 Type-A Female
Video Output	1 x HDMI Female
Power	1 x USB-C DC-in Female* Port 1 : Supports USB-C PD laptop charging at 5V, 9V, 15V, 20V output* Port 2 : Supports max. 5V, 2A output *Supports maximum 100W USB-C PD power adapter input. *For device charging, a Limited Power Source (LPS) certified USB-C PD Power Adapter over 65 Watt is recommended. The minimum system power requirement for basic USB functions and video output should be at least 5V, 3A. *The first 15W will supply the US3310, the next 10W will supply USB-C device connected to Port 2, and the balance power will supply USB-C device connected to Port 1.
Port Selection	
Input	Remote port selector
Video Resolution	Up to 3840 x 2160 @ 30Hz
System Requirements	<ul style="list-style-type: none"> • Windows 10 and above, USB-C enabled computer with DP Alt Mode* *With Intel 7th-Generation Core Processor (Kaby-Lake) and above. More info about CPU generation, please find: https://www.intel.com/content/www/us/en/processors/processor-numbers.html <ul style="list-style-type: none"> • Mac OS X 10.12 and above, USB-C enabled computer Android 8.0 and later, USB-C enabled Smartphone with DP Alt Mode** **Only Samsung and Huawei support PC-like operation, others only support mirror mode. For a list of supporting mobile device, refer to US3310's user manual. <ul style="list-style-type: none"> • iOS 12.1 and above, iPad Pro 3rd generation (2018)*** ***For better HID experience, iPadOS 13 and above is recommended.
Power Consumption	DC5V: 1.24W
LEDs	
Selected	2 (White)
Environmental	
Operating Temperature	0 – 40°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Aluminum
Weight	0.33 kg (0.73 lb)
Dimensions (L x W x H)	14.30 x 11.90 x 2.38 cm (5.63 x 4.69 x 0.94 in.)
Carton Lot	10 pcs
Included Accessories	2x USB-C Cables; 1x Remote Port Selector

US7220

2-Port Thunderbolt™ 2 KVM Docking Station

2-in-1 Docking Station / KVM Switch with Dual 4K Displays




Features

- Thunderbolt 2.0 compliant with data transfer rates up to 20Gbps
- Connects 11 devices to a laptop through a single Thunderbolt cable*
- Two Thunderbolt ports connect two Thunderbolt hosts
- One Thunderbolt port connects a Thunderbolt device and daisy-chains up to 5 additional devices
- Gigabit Ethernet port
- HDMI port supports an additional HDMI display
- Two USB 2.0 ports with data transfer rates up to 480 Mbps
- Supports three USB 3.2 Gen 1 ports with data transfer rates up to 5 Gbps
- Supports high-definition audio signals with Dolby and DTS pass-through via Mini TOSLINK; and 2.1 channel audio via 3.5 mm audio cable
- Analog/Digital audio line-in and line-out
- Supports HDMI with 4K (UHD) resolution
- Supports DisplayPort 1.2 with 4K (UHD) resolution
- eSATA port for storage devices

*Additional Thunderbolt cable sold separately.

Setup > US7220

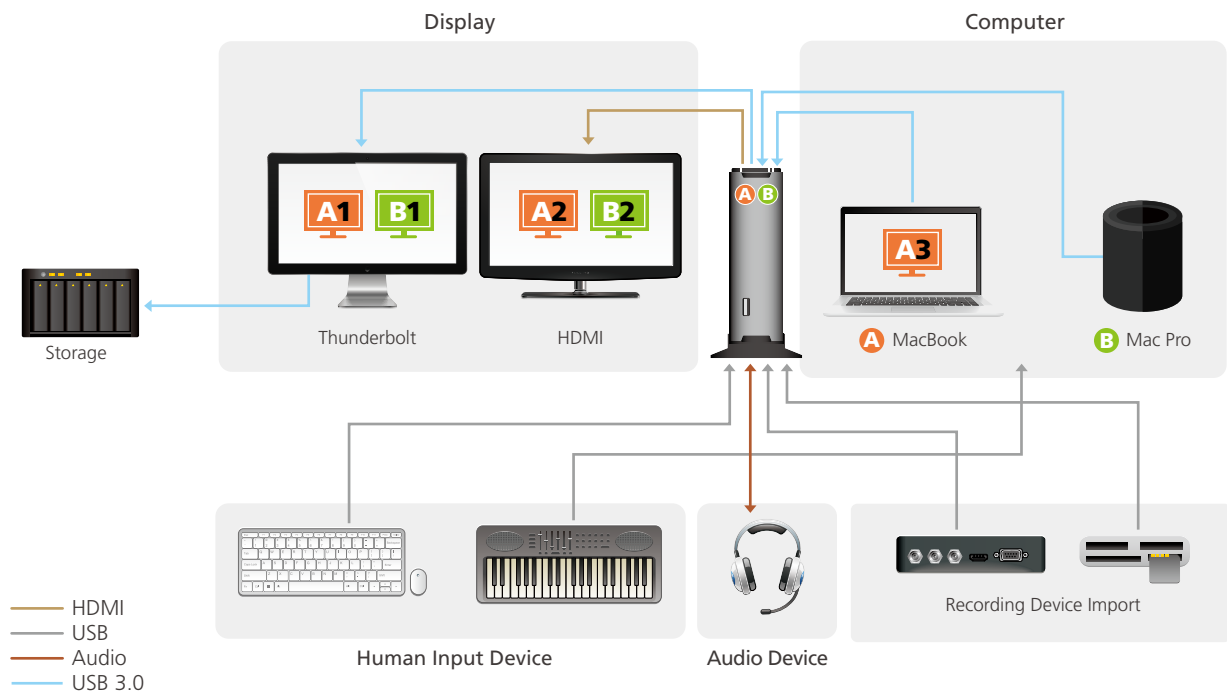

Specifications

	US7220
Computer Connections	2 Thunderbolt Computers
Device Connections	5 Max. (via Thunderbolt Daisy-Chaining)
Connectors	
Computer	2 x Thunderbolt 2.0 Female (Black)
Device	1 x Thunderbolt 2.0 Female (Black) 3 x USB 3.2 Gen 1 Type-A Female (Blue) 2 x USB 2.0 Type-A Female (Black) 1 x E-SATA Female (Black)
Direct	1
Maximum	5 (via Daisy chain mode)
LAN Ports	1 x Gigabit Ethernet Female (Black)
Audio Inputs	1 x Stereo / Mini Toslink Jack Female (Black)
Audio Outputs	1 x Stereo / Mini Toslink Jack Female (Black)
Power Jack	1
Video Output	1 x HDMI Female 1 x Thunderbolt / Mini DisplayPort Female*
Port Selection	Port selection button x 2
LEDs	
Selected	2
Video Resolution	<p>Single View: Mini DisplayPort / Thunderbolt – 3840 x 2160 @ 60* HDMI – 3840 x 2160 @ 30</p> <p>Dual View: Thunderbolt – 3840 x 2160 @ 60 HDMI – 3840 x 2160 @ 30</p> <p>*The US7220 supports either HDMI or Mini DisplayPort, but not both.</p>
Power	
Power Mode	Self-Powered
Consumption	DC 12V: 6.78W
Environmental	
Operating Temperature	0 – 40°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Aluminum
Weight	0.78 kg (1.72 lb)
Dimensions (L x W x H)	5.70 x 9.75 x 19.19 cm (2.24 x 3.84 x 7.56 in.)
Carton Lot	3 pcs
Included Accessories	1x Thunderbolt Cable; 1x Power Adapter; 1x Vertical Stand

UC3238

2.7 m USB-C to 4K HDMI Converter




Features

- Connects a USB-C enabled laptop or smartphone which utilizes "DP Alt Mode" functionality to an HDMI compatible display using a single cable
- Supports resolution up to 3840 x 2160 @ 60Hz
- Supports a long-distance connectivity of up to 2.7 meters
- No additional dongles and HDMI extension cables needed
- Plug and play – no drivers or external power adapter needed
- Works with all major operating systems: Windows®, OS X®, and iPad Pro® (USB-C)
- Compatible with Thunderbolt 3 (USB-C)

UC3008A1

USB-C to 4K HDMI Adapter



Features

- Transfers high-quality video from a USB-C enabled laptop or smartphone to a HDMI 4K@60Hz (4096 x 2160@60Hz) display, TV or projector
- Premium casing can resist signal interference during video transmission and heat insulation
- Compact and lightweight design
- Works with all major operating systems: Windows®, OS X®, and iPad Pro® (USB-C)
- Plug and Play – no software required

Specifications

	UC3238
Computer Connections	1
Connectors	
USB Port	1 x USB-C Male
Video Output	1 x HDMI Type A Male
Video	
Max. Pixel Clock	594MHz
Max. Resolution	3840 x 2160 @ 60
Compliance	USB 3.2 Type-C with DP Alt Mode (Thunderbolt™ 3 Compatible), USB Billboard Device Class, HDCP 2.2, HDMI
Audio	
Output	1 x HDMI Type A Male
Power	
Power Mode	Bus-Powered
Consumption	DC5V: 1W
Environmental	
Operating Temperature	0 – 40 °C
Storage Temperature	-20 – 60 °C
Humidity	0 – 80% RH, Non-Condensing
Physical Properties	
Housing	Plastic
Weight	0.09kg (0.35lb)
Dimensions (L x W x H)	6.40 x 2.10 x 1.10 cm (2.52 x 0.83 x 0.43 in.)
Carton Lot	20 pcs

Specifications

	UC3008A1
Video Input	
Interfaces	15.4 cm USB 3.2 Gen1 Type-C Cable
Video Output	
Interfaces	1 x HDMI Female
Video	
Max. Pixel Clock	594MHz
Max. Resolution	4096 x 2160@60Hz
Compliance	USB 3.2 Gen 1 Type-C with DP Alt Mode (Thunderbolt™ 3 Compatible) HDMI; HDCP 2.2; USB Billboard Device Class
Audio	
Output	1 x HDMI Female
Power Consumption	DC5V: 1W
System Requirements	Windows 10 and above, USB-C enabled computer with DP Alt Mode* Mac OS X 10.12 and above, USB-C enabled computer Android 8.0 and later, USB-C enabled Smartphone with DP Alt Mode iOS 12.1 and above, iPad Pro 3rd generation (2018)
Environmental	
Operating Temperature	0 – 40°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Aluminum
Weight	0.02 kg (0.04 lb)
Dimensions (L x W x H)	4.32 x 1.10 x 2.20 cm (1.70 x 0.43 x 0.87 in.)
Carton Lot	20 pcs

UC3002A

USB-C to VGA Adapter

OS Support Win, Mac, iPad Pro	Video In USB-C	Video Out VGA	Resolution 1920 x 1200	Bus-Powered
----------------------------------	-------------------	------------------	---------------------------	-------------



Features

- Compliant with USB Type-C specification
- Transfers high-quality videos from a USB-C enabled laptop or smartphone to a 1920 x 1200@60Hz VGA display, or projector
- Premium casing can resist signal interference during video transmission and heat insulation
- Compact and lightweight design
- Works with all major operating systems: Windows®, OS X®, and iPad Pro® (USB-C)
- Plug-and-Play – no software required

UC485

USB to RS-422/485 Adapter

OS Support Win, Mac, Linux, Vista	USB 2.0	RS-232/485 Functionality	Bus-Powered
--------------------------------------	---------	--------------------------	-------------



Features

- Converts a USB port to a Legacy RS-422 or RS-485 COM port
- Fast COM Port Transmission – up to 921.6 Kbps
- Package included DB-9 female to terminal block adapter for easy wiring
- Supports Terminal / ECHO mode by mode selector
- Supports Windows Vista / 7 and above, Mac and Linux
- Plug and Play – no power supply needed

Specifications

	UC3002A
Video Input	
Interfaces	1 x USB-C Male (Black)
Video Output	
Interfaces	1 x HDB-15 Female (Black)
Video	
Max. Pixel Clock	148.5MHZ
Max. Resolution	1920 x 1200@ 60Hz
Compliance	USB 3.2 Gen1 Type-C with DP Alt Mode (Thunderbolt™ 3 Compatible) USB Billboard Device Class HDCP 1.3
Power Consumption	
	DC5V: 0.68W
System Requirements	
	Windows 10 and above, USB-C enabled computer with DP Alt Mode* * With Intel 7th-Generation Core Processor (Kaby-Lake) and above. More info about CPU generation, please find: https://www.intel.com/content/www/us/en/processors/processor-numbers.html Mac OS X 10.12 and above, USB-C enabled computer Android 8.0 and later, USB-C enabled Smartphone with DP Alt Mode iOS 12.1 and above, iPad Pro 3rd generation (2018)
Environmental	
Operating Temperature	0 – 40°C
Storage Temperature	-20 – 60°C
Humidity	0 - 80% RH, Non-Condensing
Physical Properties	
Housing	Aluminum
Weight	0.02 Kg (0.06 lb)
Dimensions (L x W x H)	3.95 x 1.40 x 9.60 cm (1.56 x 0.55 x 3.78 in.)
Carton Lot	20 pcs

Specifications

	UC485
Connectors	
USB Port	1 x USB Type-A Male (White)
Serial	1 x DB-9 Male (Silver)
Data Rate	Up to 921.6 Kbps
Cable Length	1.2 m
LEDs	Power Status / RS-422 (Orange), RS-485 (Green)
Power Mode	Bus-Powered
USB Specification	USB Compliant
Environmental	
Operating Temperature	0 – 40°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Dimensions (L x W x H)	0.09 kg (0.2 lb)
Weight	9.53 x 4.10 x 2.20 cm (3.75 x 1.61 x 0.87 in.)
Carton Lot	40 pcs
Included Accessories	1x Terminal Adapter

UC232B

USB to RJ-45 (RS-232) Console Adapter



Features

- Converts a USB port to RJ-45 Console port (RS-232)
- Supports straight RJ-45 cable, no need to use Rolled RJ-45 Cable for connecting Networking Router, modem or network switch for configuration
- Fast COM Port Transmission – up to 921.6 Kbps data transfer rate
- COM retention saves the assigned port settings for the device
- OS Compatibility: Windows, Mac, Linux
- Plug-and-Play – Small and lightweight make it a perfect travel companion
- No external power supply needed

Specifications

	UC232B
Connectors	
USB Port	1 x USB Type-A Male (White)
Serial	1 x RJ-45 Male (Silver)
Data Rate	Up to 921.6 Kbps
Cable Length	1.2 m
LEDs	Power Status
Power	
Power Mode	Bus-Powered
Consumption	DC5V: 0.2W
USB Specification	USB Compliant
Environmental	
Operating Temperature	0 – 40°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Weight	0.06 kg (0.13 lb)
Dimensions (L x W x H)	2.56 x 5.84 x 2.23 cm (1.01 x 2.3 x 0.88 in.)
Carton Lot	20 pcs

UC232A / UC232A1

USB to RS-232 Adapter (35 cm) / USB to RS-232 Adapter (100 cm)



Features

- Supports the RS-232 Serial interface
- Up to 921.6 Kbps data transfer rate
- Full compliance with the USB specification
- OS Compatibility: Windows, Mac, Linux
- Works with cellular phones, PDAs, digital cameras, modems or ISDN terminal adapter

Specifications

	UC232A		UC232A1	
Connectors				
USB Port	1 x USB Type-A Male (White)			
Serial	1 x DB-9 Male (Silver)			
Data Rate	Up to 921.6 Kbps			
Cable Length	35 cm		1 m	
LEDs	Power (Orange)			
Power Mode	Bus-Powered			
USB Specification	USB Compliant			
Environmental				
Operating Temperature	0 – 40°C			
Storage Temperature	-20 – 60°C			
Humidity	0 – 80% RH, Non-condensing			
Physical Properties				
Housing	Plastic			
Weight	0.04 kg (0.09 lb)		0.06 kg (0.13 lb)	
Dimensions (L x W x H)	6.59 x 3.40 x 1.60 cm (2.59 x 1.34 x 0.63 in.)			
Carton Lot	40 pcs			

UC2322 / UC2324 / UC4852 / UC4854

2/4-Port USB to RS-232/RS-485/RS-422 Hub



Front

- UC2322 / UC4852




- UC2324 / UC4854



Rear

- UC2322 / UC4852



- UC2324 / UC4854



Features

- Easy way to add 2/4 serial ports
- Up to 115.2 Kbps data transfer rate for each serial port
- Supports RS-232 serial interface (UC2322 / UC2324)
- Supports RS-422 / RS-485 serial interface (UC4852 / UC4854)
- Dual data buffers for each upstream and downstream data transfer
- No IRQ, DMA, I/O address resources required
- Supports automatic handshake mode
- Supports both bus power and external power
- USB 2.0 compatible
- Supports hot-swapping and plug-and-play
- Built-in 16KV ESD protection
- Works with mobile phones, digital cameras, modems and ISDN terminal adapters
- OS support - Windows 2000 / 2003 / XP / NT

Specifications

	UC2322	UC2324	UC4852	UC4854
Device Connections	2	4	2	4
Connectors				
USB Port	1 x USB Type-B Female (White)			
Power	1 x DC Jack			
Serial	2 x DB-9 Male (Black)	4 x DB-9 Male (Black)	2 x DB-9 Male (Black)	4 x DB-9 Male (Black)
LEDs				
Ports	2 (Green)	4 (Green)	2 (Green)	4 (Green)
Power	1 (Orange)			
Data Rate	115.2 Kbps (max.)			
USB Specification	USB 2.0 Compatible			
Power Mode	Bus-Powered / Self-Powered by Optional Power Adapter			
Power Consumption	DC5V: 0.46W	DC5V: 0.4W	DC5V: 0.22W	DC5V: 0.50W
Environmental				
Operating Temperature	0 – 50°C			
Storage Temperature	-20 – 60°C			
Humidity	0 – 80% RH, Non-condensing			
Physical Properties				
Housing	Metal			
Weight	0.30 kg (0.66 lb)	0.32 kg (0.7 lb)	0.30 kg (0.66 lb)	0.32 kg (0.7 lb)
Dimensions (L x W x H)	12.50 x 8.00 x 2.50 cm (4.92 x 3.15 x 0.98 in.)			
Carton Lot	20 pcs			
Included Accessories	1x USB Cable; 1x Installation Disk			

UC1284B

USB to IEEE1284 Printer Adapter (1.8 m)

OS Support

Win

 Bus-Powered



Features

- Converts the USB on PCs, laptop PCs and handheld computing devices into a parallel port for printer connection
- Fully bi-directional to ensure compatibility with today's latest printers
- 1 USB Type-A connector for standard USB cable connection
- 1 C-36 parallel connector
- Bus-powered
- Max. throughput: 1.2 Mbits / Sec (ECP Mode)
- OS Support: Windows 2000 / Windows XP / Windows Vista and Windows 7

Specifications

	UC1284B
Connectors	
USB Port	1 x USB Type-A Male (White)
Printer	1 x C-36 Male
Data Rate	1.2 Mbits / Sec
Cable Length	1.8 m
LEDs	N/A
Power	
Power Mode	Bus-Powered
Consumption	DC5V: 0.1W
USB Specification	USB Compliant
Environmental	
Operating Temperature	0 – 40°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Dimensions (L x W x H)	0.11 kg (0.24 lb)
Weight	5.30 x 4.30 x 1.95 cm (2.09 x 1.69 x 0.77 in.)
Carton Lot	40 pcs

US3342

2-Port USB-C Gen 2 Sharing Switch with Power Pass-through



Front



Rear

Features

- Enables two USB-C computers to share 4 USB 3.2 Gen 2 peripheral devices with data transfer rates up to 10Gbps
- Supports USB-C Power Delivery 3.0 for laptop charging up to 85W (Additional USB-C Power Adapter is needed)*
- BEZEL X – Enables file transfer function and mice control cross two platforms, Windows and Mac
- Supports power profiles 5V, 9V, 15V, and 20V power specification
- Switches device via Remote Port Selector by pressing a button
- LEDs Console Indicator – Allows users to know which computer is active
- Plug and play – No drivers or external power adapter needed
- Overcurrent protection

*For device charging, a Limited Power Source (LPS) certified USB-C PD Power Adapter over 65W is recommended. The minimum system power requirement for basic USB functions and video output should be at least 5V, 3A.

Specifications

	US3342
Computer Connections	2
Connectors	
Computer	2 x USB 3.2 Gen 2 Type-C Female (Black)
Device	3 x USB 3.2 Gen 2 Type-A Female (Blue) 1 x USB 3.2 Gen 2 Type-C Female (Black)
Power	1 x USB Type-C Female, supports USB PD3.0 at 5V, 9V, 15V and 20V output
Port Selection	
Input	Remote port selector / software
Power	
Power Mode	Bus-Powered
Power Consumption	DC5V: 0.43W
LEDs	
Selected	2 (White)
Environmental	
Operating Temperature	0 – 40°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Aluminum
Weight	0.26 kg (0.57 lb)
Dimensions (L x W x H)	14.30 x 9.00 x 2.38 cm (5.63 x 3.54 x 0.94 in.)
Carton Lot	10 pcs
Included Accessories	2x USB-C 3.2 Gen 2 Cables; 1x Remote Port Selector

US3344I

4x4 USB 3.2 Gen 1 Industrial Hub Switch



Front



Rear



Features

- Enables four computers to share USB peripheral up to four devices
- Supports USB 3.2 Gen 1 specification, maximum data transfer rates up to 5Gbps
- Multiplatform support - Windows, Mac and Linux
- LED indicators display port focus
- Metal mechanical cassis with wall mountable designs
- Supports aftermarket USB M2 screw locking cable
- Supports port selection via remote controller or RS-422/RS-485 link through 5-pin terminal block
- Hot pluggable
- Supports DC 9-24V power input by terminal block
- Supports Battery Charging V1.2 and overcurrent protection

Specifications

	US3344I
Computer Connections	4
Connectors	
Computer	4 x USB Type-B Female (Blue)
Device	4 x USB Type-A Female (Blue)
Serial	1 x 5-pin Terminal Plug (Green)
Power	1 x 2-pin 9-24V Terminal Plug (Green)
Power (Optional)	1 x 12V DC Jack Female (Black)* *Available for purchase separately from your closest ATEN dealer (Part No.: 0AD8-8012-33MG)
Power Mode	Terminal Block / DC Jack Power Adapter
Port Selection	Remote port selector / Serial command
Power	
Power Mode	Bus-Powered
Power Consumption	DC12V: 0.376W
LEDs	
Selected	4 (Green)
Serial	RS-422 (Orange) RS-485 (Green)
Environmental	
Operating Temperature	0 – 50°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Metal
Weight	0.51 kg (1.12 lb)
Dimensions (L x W x H)	20.00 x 8.00 x 2.50 cm (7.87 x 3.15 x 0.98 in.)
Carton Lot	5 pcs
Included Accessories	2x USB 3.2 Gen 1 Type-B to Type-A Cable 1.2 m; 2x USB 3.2 Gen 1 Type-B to Type-A Cable 1.8 m; 1x Remote Port Selector; 1x Mounting Kit; 1x Terminal Block Adapter Set (an RS-422/RS-485 and a DC terminal block adapter)

US234 / US434 / US3324 / US3344

2x4 / 4x4 USB 3.2 Gen 1 Peripheral Sharing Switch




Front

- US234 / US434 / US3324 / US3344



Rear

- US234 / US3324



- US434 / US3344



Features

- Enables 2 (US234 / US3324) / 4 (US434 / US3344) computers to share 4 USB 3.2 Gen 1 devices
- Simple port selection via remote port selector for convenient switch placement
- USB 3.2 Gen 1 compliant, supporting data transfer rates of up to 5Gbps
- LEDs indicate which computer is active
- Overcurrent protection
- Micro USB power jack for additional power supply
- Bus-powered – no external power supply needed
- Plug and Play – no drivers or external power adapter needed
- Multiplatform support – Windows, Linux and Mac
- Additional USB 3.2 Gen 1 Type-B to Type-C cable included in the US3324 / US3344 package

Specifications

	US234	US434	US3324	US3344
Computer Connections	2	4	2	4
Port Selection	Remote port selector			
Connectors				
Computer	2 x USB Type-B Male (Blue)	4 x USB Type-B Male (Blue)	2 x USB Type-B Male (Blue)	4 x USB Type-B Male (Blue)
Device	4 x USB Type-A Female (Blue)			
Power (Optional)	1 x USB micro B Female (Black)			
Cable Length				
USB Cable	2 x USB 3.2 Gen 1 B to A Cable 1.2 m	2 x USB 3.2 Gen 1 B to A Cable 1.2 m / 2 x USB 3.2 Gen 1 B to A Cable 1.8 m	2 x USB 3.2 Gen 1 B to A Cable 1.2 m / 1 x USB 3.2 Gen 1 B to C Cable 1.8 m	2 x USB 3.2 Gen 1 B to A Cable 1.2 m / 2 x USB 3.2 Gen 1 B to A Cable 1.8 m / 2 x USB 3.2 Gen 1 B to C Cable 1.8 m
Remote Port Selector	1.8 m			
Power				
Power Mode	Bus-Powered			
Power Consumption	DC5V: 0.75W			
LEDs				
Selected	2 (White)	4 (White)	2 (White)	4 (White)
Environmental				
Operating Temperature	0 – 40°C			
Storage Temperature	-20 – 60°C			
Humidity	0–80% RH, Non-condensing			
Physical Properties				
Housing	Plastic			
Weight	0.12 kg (0.26 lb)	0.13 kg (0.29 lb)	0.12 kg (0.26 lb)	0.13 kg (0.29 lb)
Dimensions (L x W x H)	9.37 x 9.30 x 2.68 cm (3.69 x 3.66 x 1.06 in.)			
Carton Lot	10 pcs			

US224 / US424

2x4 / 4x4 USB 2.0 Peripheral Sharing Switch



Features

- Simple port selection via remote port selector for convenient switch placement
- Built-in USB ports – all-in-one design allows for a neat and tidy installation that reduces cable clutter
- Enables 2 / 4 computers to share 4 USB devices – a USB keyboard, mouse and up to 2 peripheral devices
- USB 2.0 compliant
- Multiplatform support – Windows, Linux, Mac and Sun
- LED indicators display port focus
- Overcurrent protection
- Bus-powered (supports optional USB power adapter)
- Hot pluggable

Specifications

	US224	US424
Computer Connections	2	4
Port Selection	Remote port selector	
Connectors		
Computer	2 x USB Type-A Male (Black)	4 x USB Type-A Male (Black)
Device	4 x USB Type-A Female (Black)	
Power (Optional)	1 x USB mini B Female (Black)	
Cable Length		
USB Cable	2 x 1.2 m	2 x 1.2 m / 2 x 1.8 m
Remote Port Selector	1.8 m	
Power		
Power Mode	Bus-Powered	
Power Consumption	DC5V: 0.51W	
LEDs		
Selected	2 (Green)	2 (Green / Orange)
Environmental		
Operating Temperature	0 – 40°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Plastic	
Weight	0.14 kg (0.31 lb)	0.22 kg (0.48 lb)
Dimensions (L x W x H)	8.24 x 6.65 x 2.53 cm (3.24 x 2.62 x 1 in.)	
Carton Lot	20 pcs	

US221A / US421A

2/4-Port USB 2.0 Peripheral Sharing Switch



• US221A



• US421A



Features

- Auto switch function – no need for print server
- Supports multifunction printers
- Enables 2 / 4 computers share a single USB peripheral device
- Simple port selection via pushbuttons, configuration utility, or auto switch function
- Supports transfer rates up to 480 Mbps
- Multiplatform support – Windows and Mac
- LED indicators display port focus
- Overcurrent protection
- Bus-powered
- Hot pluggable
- Buzzer indicates switching between computers

Specifications

	US221A	US421A
Console Connections	2	4
Port Selection	Pushbuttons, Software, Auto Switch	
Connectors		
Computer	2 x USB Type-B	4 x USB Type-B
Device	1 x USB Type-A	
LEDs		
Devices	1 (Orange)	
Selected	2 (Green)	4 (Green)
Switches	1 x Pushbutton	4 x Pushbutton
Power Mode	Bus-Powered	
Power Consumption	DC5V: 0.4W	DC5V: 0.86W
Environmental		
Operating Temperature	0 – 40°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Plastic	
Weight	0.06 kg (0.13 lb)	0.10 kg (0.22 lb)
Dimensions (L x W x H)	7.18 x 6.58 x 2.44 cm (2.83 x 2.59 x 0.96 in.)	10.40 x 7.96 x 2.20 cm (4.09 x 3.13 x 0.87 in.)
Carton Lot	20 pcs	
Included Accessories	1x USB Type-A to USB Type-B Cable (1.8m)	

UE3310 / UE3315A

10 m / 15 m USB 3.2 Gen 1 Extender

OS Support
Win, Mac

 USB 3.2
Gen 1

10 m
Long
Distance
Transmission

15 m
Long
Distance
Transmission

 Bus-
Powered



Features

- Daisy-chainable, maximum distance of up to 50 m (UE3310) / 30 m (UE3315A)
- USB 3.2 Gen 1 and 2.0 compatible
- Ultra slim design and unique locker head design
- Multiplatform support – Windows and Mac
- Additional power adapter included

UE350A

5 m USB 3.2 Gen 1 Extender

OS Support
Win, Mac

 USB 3.2
Gen 1

 Bus-
Powered



Features

- Extends the distance of one USB device up to 5 m
- USB 3.2 Gen 1 and 2.0 compatible
- Supports USB super-speed (5 Gbps)
- Plug and play – no additional software installation required
- Multiplatform support – Windows and Mac
- Bus-Powered*

Note: * Some USB devices may require a separate power adapter

Specifications

	UE3310	UE3315A
Connectors		
USB Port	1 x USB 3.2 Gen 1 Type-A (Male)	
Downstream	1 x USB 3.2 Gen 1 Type-A (Female)	
USB Specification	USB3.2 Gen1 / 2.0 / 1.1 for Super / High / Full speed	
Cable Length	10 m	15 m
Data Rate	Up to 5 Gbps	
Power		
Power Mode	Bus-Powered / Self-Powered	
Consumption	DC5V: 0.6W	
Environmental		
Operating Temperature	0 – 40°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Plastic	
Weight	0.76 kg (1.67 lb)	1.19 kg (2.62 lb)
Dimensions (L x W x H)	8.19 x 2.22 x 1.75 cm (3.22 x 0.87 x 0.69 in.)	8.19 x 2.22 x 1.75 cm (3.22 x 0.87 x 0.69 in.)
Carton Lot	5 pcs	
Included Accessories	1x AC Power Adapter; 1x USB Extension Cable	

Specifications

	UE350A
Connectors	
USB Port	1 x USB Type-A Male
Downstream	1 x USB Type-A Female
USB Specification	USB 3.2 Gen 1 / 2.0 for High / Full speed
Cable Length	5 m
Data Rate	Up to 5 Gbps
Power	
Power Mode	Bus-Powered
Power Consumption	DC5V: 0.24W
Environmental	
Operating Temperature	0 – 40°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Weight	0.22 kg (0.48 lb)
Dimensions (L x W x H)	6.02 x 4.00 x 2.40 cm (2.45 x 1.57 x 0.94 in.)
Carton Lot	10 pcs

UE250

5 m USB 2.0 Extender (Daisy-chaining up to 25 m)



Features

- Extends one USB device up to 5 m
- USB 2.0 compliant
- USB IF approved
- Fully compliant with USB electrical and timing specs for USB hubs
- Multiplatform support – Windows and Mac
- Bus-powered

Specifications

	UE250
Connectors	
Device	USB Type-A Male; USB Type-A Female
LEDs	
Link	1 (Green)
Overcurrent	1 (Red)
USB Specification	USB 2.0 for High / Full speed
Driver Support	Native Driver Support
Power	
Power Mode	Bus-Powered
Power Consumption	DC5V: 0.23W
Data Rate	Up to 480 Mbps
Environmental	
Operating Temperature	0 – 40°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Weight	0.20 kg (0.44 lb)
Dimensions (L x W x H)	6.02 x 4.00 x 2.40 cm (2.45 x 1.57 x 0.94 in.)
Carton Lot	20 pcs

UE150

5 m USB Extender (Daisy-chaining up to 25 m)



Features

- Extends one USB device up to 5 m
- USB 2.0 compliant
- USB IF approved
- Fully compliant with USB electrical and timing specs for USB hubs
- Multiplatform support – Windows and Mac
- Bus-Powered

Specifications

	UE150
Connectors	
Device	USB Type-A Female
Signal Range	Up to 5 m
USB Specification	USB 2.0 for High / Full speed
Driver Support	Native Driver Support
Power	
Power Mode	Bus-Powered
Power Consumption	DC5V: 0.174W
Data Rate	Up to 12 Mbps
Environmental	
Operating Temperature	0 – 40°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Weight	0.19 kg (0.42 lb)
Dimensions (L x W x H)	6.02 x 4.00 x 2.40 cm (2.45 x 1.57 x 0.94 in.)
Carton Lot	25 pcs

UE2120 / UE2120H

12 m USB 2.0 Extender (Daisy-chaining up to 60 m)

12 m 4-Port USB 2.0 Extender (Daisy-chaining up to 60 m)



Features

- Extends USB device up to 12 m
- 12M 4-port USB 2.0 Extender (Daisy-chaining up to 60m)
- Up to 4 extender cables (UE2120) and 1 Extender Hub (UE2120H) can be chained for a distance of up to 60 meters
- 4 downstream USB 2.0 ports (UE2120H only)
- Lockable mechanical design for secure connection (UE2120 only)
- Bus powered – no power adapter required
- Multiplatform support – Windows and Mac
- Plug and play – no additional driver required

UCE32100

4-Port USB 2.0 Cat 5 Extender (100 m)



Features

- True USB 2.0 transparent extension over CAT 5 cabling up to 100 meters
- Supports all USB 2.0 devices up to 480Mbps
- USB Lossless – Higher compatibility of remote USB devices
- An integrated four port hub allows for extension of up to four USB devices without the need for an additional hub
- Power supply for remote unit to ensure power delivery to multiple devices at once
- Compact size with wall mounting and din rail included for flexible installation
- DC jack lock kit included to ensure durable power adapter connection
- Supports Windows®, OS X®, and Linux®
- Plug and play – no additional driver required

Specifications

	UE2120		UE2120H	
Connectors				
USB Port	1 x USB Type-A Male			
Downstream	1 x USB Type-A Female		4 x USB Type-A Female	
LEDs	1 (Green)			
USB Specification	USB 2.0 for High / Full Speed			
Cable Length	12 m			
Power Mode	Bus-Powered			
Environmental				
Operating Temperature	0 – 40°C			
Storage Temperature	-20 – 60°C			
Humidity	0 – 80% RH, Non-condensing			
Physical Properties				
Housing	Plastic			
Weight	0.56 kg (1.23 lb)		0.63 kg (1.39 lb)	
Dimensions (L x W x H)	6.40 x 2.20 x 1.30 cm (2.52 x 0.87 x 0.51 in.)		8.20 x 4.10 x 1.70 cm (3.23 x 1.61 x 0.67 in.)	
Carton Lot	20 pcs			

Specifications

	UCE32100
Local Unit	
Upstream Port	1 x USB Type-B Female
Downstream Port	1 x RJ-45 Female; 1 x Micro USB Female
Power	1 x DC Jack
Remote Unit	
Upstream Port	1 x RJ-45 Female
Downstream Port	4 x USB Type-A Female; 1 x Micro USB Female
Power	1 x DC Jack
USB Specification	USB 2.0 High-Speed
Cable Type	Cat 5 UTP Cable
Signal Range	100 m
LEDs	2 x LED
Power Consumption	DC5V: 1.708W; DC5V: 1.649W
Environmental	
Operating Temperature	0 – 50°C
Storage Temperature	-20 – 70°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Metal
Weight	0.21 kg (0.46 lb)
Dimensions (L x W x H)	10.15 x 7.90 x 2.44 cm (4 x 3.11 x 0.96 in.)
Carton Lot	5 sets
Included Accessories	1x USB 2.0 Type-A Male to Type-B Male Cable; 1x Power Adapter; 1x Power Cord; 4x Mounting Kit; 2x Din Rail; 2x DC Jack Lock Kit; 2x Rubber Feet Sets

UCE260

USB 2.0 Cat 5 Extender (up to 60 m)



Features

- Extends signal transmission distance of a USB devices up to 60 m via a Cat 5 / 5e / 6 cable
- USB specification version 2.0 compliant
- Supports hot plug and no software driver required
- The most cost-effective USB extender solution
- Includes an AC adapter to stabilize power supply

Specifications

	UCE260L	UCE260R
Connectors		
USB Port	1 x USB Type-A Male	1 x USB Type-A Female
Link	1 x RJ-45 Female	
Power	N/A	1 x DC Power Jack
USB Specification	USB 2.0 for High / Full speed	
USB Devices Supported	N/A	1 Device
Power Consumption	DC5V: 0.65W	DC5V: 0.95W
Environmental		
Operating Temperature	0 – 40°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Plastic	
Weight	0.04 kg (0.09 lb)	0.02 kg (0.05 lb)
Dimensions (L x W x H)	6.30 x 3.10 x 2.19 cm (2.48 x 1.22 x 0.86 in.)	6.30 x 3.10 x 2.19 cm (2.48 x 1.22 x 0.86 in.)
Carton Lot	20 pcs	
Included Accessories	1x Power Adapter (5V, 2.6A);1x Remote Unit	

UCE60

USB Cat 5 Extender (up to 60 m)



Features

- Extends one USB device up to 60 m via a Cat 5 / Cat 5e / 6 cable
- USB 2.0 full speed compliant
- Provides support for any full-speed (12 Mb/s) or low speed (1.5 Mb/s) USB devices
- LED indicates when additional external power supply needed
- Embedded USB transceivers prevent signal loss
- Lowest cost solution for extending USB signals
- No additional installation software required
- Multiplatform support – Windows and Mac

Specifications

	UCE60L	UCE60R
Connectors		
USB Port	1 x USB Type-A Male (White)	1 x USB Type-A Female (White)
Link	1 x RJ-45 Female	
Power	N/A	1 x DC Jack (Optional)
USB Specification2.0 Full / Low Speed		
Environmental		
Operating Temperature	0 – 40°C	
Storage Temperature	-40 – 85°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Plastic	
Weight	0.03 kg (0.09 lb)	0.02 kg (0.05 lb)
Dimensions (L x W x H)	6.30 x 3.10 x 2.19 cm (2.48 x 1.22 x 0.86 in.)	6.30 x 3.10 x 2.19 cm (2.48 x 1.22 x 0.86 in.)
Carton Lot	20 pcs	

UCE3250

4-Port USB 2.0 Cat 5 Extender (up to 50 m)



Features

- Extension distance of up to 50 m over a Cat 5 / 5e / 6 cable
- USB specification version 2.0 compliant
- USB Lossless-Higher compatibility of remote USB devices
- Metal mechanical with wall mount design supports industrial deployment
- Supports Windows®, OS X®, and Linux®
- Plug and play

Specifications

	UCE3250L	UCE3250R
Connectors		
USB Port	1 x USB Type-B Female	4 x USB Type-A Female
Link	1 x RJ-45 Female	
Power	N/A	1 x DC Jack
USB Specification	USB 2.0 for High / Full speed	
USB Devices Supported	N/A	4 Devices
Power Consumption	Bus-Powered	Self-Powered; DC5V: 13W
Environmental		
Operating Temperature	0 – 50°C	
Storage Temperature	-20 – 70°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal	
Weight	0.09 kg (0.2 lb)	0.16 kg (0.35 lb)
Dimensions (L x W x H)	6.70 x 6.02 x 2.37 cm (2.64 x 2.37 x 0.93 in.)	6.33 x 11.04 x 2.41 cm (2.49 x 4.35 x 0.95 in.)
Carton Lot	5 sets	
Included Accessories	1x USB Type-A Male to Type-B Male Cable; 1x Power Adapter	

UEH4102

4-Port USB 2.0 Cat 5 Extender over LAN



Features

- Extends USB transmission over a Gigabit Ethernet Local Area Network (LAN)
- ExtremeUSB® – supports transparent USB 2.0 signals and true plug-and-play (no software or drivers required)
- Pre-paired networked configuration through MAC Address for simple installation. No pairing action required
- Supports automatic connection link between Local and Remote units through DHCP
- Up to 100 m between extender and switch and between switches over Cat 5e / 6 / 7 cables
- Operates with all USB peripherals - flash drives, keyboards, mice, webcams, interactive whiteboards, and more
- Works with all major operating systems: Windows®, OS X®, and Linux®

Specifications

	UEH4102L	UEH4102R
Connectors		
USB Port	1 x USB Type-B Female	4 x USB Type-A Female
Link	1 x Gigabit Ethernet Female	
Power	N/A	1 x DC Power Jack
USB Specification	USB 2.0 High/Full/Low Speed	
USB Devices Supported	N/A	4 USB Devices
Power Consumption	Bus-Powered	DC5V: 15W
Network Protocol	10/100/1000BASE-T Ethernet (recommend 1000BASE-T Ethernet for best performance)	
Environmental		
Operating Temperature	0 – 50° C	
Storage Temperature	-20 – 70°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal	
Weight	0.19 kg (0.42 lb)	0.19 kg (0.42 lb)
Dimensions (L x W x H)	10.00 x 7.60 x 2.60 cm (3.94 x 2.99 x 1.02 in.)	
Carton Lot	5 sets	
Included Accessories	1x Power Adapter; 1x USB 2.0 Type-A to Type-B Cable	

UEH4002A

4-Port USB 2.0 Cat 5 Extender (up to 100 m)

OS Support

Win, Mac, Linux

USB

USB 2.0

EXTREME

USB

Transparent

USB Support



Features

- Extends USB transmission distance up to 100 m
- Supports all USB 2.0 devices
- ExtremeUSB® – supports transparent USB 2.0 signals and true plug-and-play (no software or drivers required)
- Fully compliant with USB Electrical and timing specs for USB hubs
- Works with all major operating systems: Windows®, OS X®, and Linux®

Specifications

	UEH4002AL	UEH4002AR
Connectors		
USB Port	1 x USB Type-B Female	4 x USB Type-A Female
Link	1 x RJ-45 Female	
Power	N/A	1 x DC Power Jack
USB Specification	USB 2.0 High / Full Speed	
USB Devices Supported	N/A	4 USB Devices
Power Mode	Bus-Powered	DC5V:15W
Signal Range	100 m	
Environmental		
Operating Temperature	0 – 50°C	
Storage Temperature	-20 – 70°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal	
Weight	0.38 kg (0.84 lb)	
Dimensions (L x W x H)	10.00 x 7.60 x 2.60 cm (3.94 x 2.99 x 1.02 in.)	
Carton Lot	5 sets	
Included Accessories	1x Power Adapter; 1x USB 2.0 Type-A to Type-B Cable (1.8 m)	

UH275 / UH284

4-Port USB 2.0 Hub

4-Port USB 2.0 Hub with Magnetic



• UH275



• UH284



Features

- Compact design, easy to store anywhere
- Built-in magnet pad for quick mount and easy movement (UH284)
- Available in silver, black and burgundy (UH284)
- Provides 4 additional USB 2.0 ports to existing USB Systems
- 4 independent, fully functional, 480 Mbps downstream ports
- USB specification version 2.0 compliant
- Supports transfer rates of 1.5 / 12 / 480 Mbps
- Overcurrent protection
- Plug-and-play

Specifications

	UH275	UH284
Connectors		
USB Port	1 x USB Type-A Male (White)	1 x USB Mini Type-B Female (Black)
Downstream	4 x USB Type-A Female (White)	
Power	1x DC Jack (Black), optional	
USB Specification	USB 2.0 for High / Full speed	
LEDs		
Power	1 (Green)	
Output Voltage (Per Port)	DC 5V	
Environmental		
Operating Temperature	0 – 40°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Plastic	
Weight	0.04 kg (0.09 lb)	
Dimensions (L x W x H)	9.00 x 3.85 x 1.20 cm (3.54 x 1.52 x 0.47 in.)	8.30 x 3.40 x 1.47 cm (3.27 x 1.34 x 0.58 in.)
Carton Lot	20 pcs	40 pcs
Included Accessories	1x Power Adapter*	1x USB Cable

Note: *Model with power adapter included only

Data Communication

Creating a connection between two interfaces is no longer a problem with the ATEN range of reliable, cost-efficient, bi-directional converters. These are extremely useful in situations in which the only port available uses an interface that is different from the device to which you need to connect.



- **Printer Network**

Simultaneous printing capability.

- **RS-232 to RS-422 / RS-485 Bi-Directional Converter**

RS-232 to RS-422/RS-485 converters for data transmission.

- **Serial PCI Card**

RS-232 / RS-422 / RS-485 converters and extenders are heavily represented in many enterprise fields.

- Telecommunications industry
- Automated teller machines
- Airport check-in and flight schedule display systems
- Automatic postal machines

Note:

The features highlighted above are not available in all products. Please refer to each product page for more details. Product information is subject to change without prior notice.

Feature Comparison

Model No.	IC164T	IC164R
Input	1 x DB-25	1 x RJ-11 (F, 6P4C)
Output	1 x RJ-11 (F, 6P4C)	1 Centronics C-36
Output Port Selection	N/A	N/A
Timeout Selection (Sec.)	N/A	N/A
Signal Range	400 m	400 m
First-Come-First-Served	N/A	N/A
Bus-Powered	•	•
Baud Rates	21 K	21 K

Model No.	IC485S	IC485SI	IC485SN
Input	1 x DB-25	1 x DB-25	1 x DB-25
Output	RS-485 / RS-422 Four Terminal Block		
RJ-11 Connector	•	N/A	•
Grounding Tab	N/A	•	N/A
DCE / DTE Selectable	•	•	•
Monitor Configuration	•	N/A	N/A
Signal / Power Isolation	N/A	•	N/A
2000V Surge Protection	N/A	N/A	N/A
Operation Mode	Point to Point, Multidrop, Simplex		
Bus-Powered	N/A	N/A	•
Signal Range	1200 m	1200 m	1200 m
Baud Rates	115.2 K	115.2 K	115.2 K

IC164

Non-Powered / High Speed Parallel Data Extender



Features

- Extends the distance between your parallel peripherals and the PC up to 400 m
- Uses RJ-11 cable to connect the transmitter and receiver units
- Easy to install and operate
- No external power adapter required
- Compact size

Specifications

	IC164R (Receiver)	IC164T (Transmitter)
Connectors	1 x C-36 Male 1 x RJ-11 Jack Female	1 x DB-25 Male 1 x RJ-11 Jack Female
Power (Optional)	DC9V: 0.4W (Min.)	
Data Rate	21 Kbytes / Sec.	
Cable Type	4 Wire Telephone Line	
Cable Length	400 m [1300'] (Max.)	
Environmental		
Operating Temperature	0 – 50°C	
Storage Temperature	-20 – 60°C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Plastic	
Weight	0.05 kg (0.11 lb)	
Dimensions (L x W x H)	7.60 x 6.20 x 2.68 cm (2.99 x 2.44 x 1.06 in.)	
Carton Lot	20 sets	

IC485S / IC485SI / IC485SN

RS-232 / RS-485 Interface Converter



• IC485S



• IC485SI



• IC485SN



Features

- Monitor configuration support (IC485S)
- Signal and power isolation support (IC485SI)
- Non-powered operation (IC485SN)
- Data transmission controlled by the RTS signal
- DCE / DTE selectable
- Point-to-Point, multidrop and simplex / duplex link selection
- Compact size
- Cable distance up to 1200 m
- Supports baud rates up to 115.2 Kbps

Specifications


	IC485S	IC485SI	IC485SN
Connectors	1 x DB-25 Female (RS-232) RS-485 / RS-422 Four Terminal Block 1x RJ-11 Female	1 x DB-25 Female (RS-232) RS-485 / RS-422 Four Terminal Block Grounding Tab	1 x DB-25 Female (RS-232) RS-485 / RS-422 Four Terminal Block 1x RJ-11 Female
Power Consumption	DC9V: 0.82W	DC9V: 0.81W	DC9V: 0.03W
Data Rate	Up to 100 Kbps under 1200 m [4000']		
Signal Range	1200 m [4000'] (Max.)		
Environmental			
Operating Temperature	0 – 50°C		
Storage Temperature	-20 – 60°C		
Humidity	0 – 80% RH, Non-condensing		
Physical Properties			
Housing	Plastic		
Weight	0.05 kg (0.11 lb)	0.06 kg (0.13 lb)	
Dimensions (L x W x H)	7.90 x 5.45 x 2.10 cm (3.11 x 2.15 x 0.83 in.)		
Carton Lot	20 pcs		10 pcs
Included Accessories	1x Power Adapter		N/A

IC-108S

RS-232 8-Port PCI Card

OS Support

Win, Linux

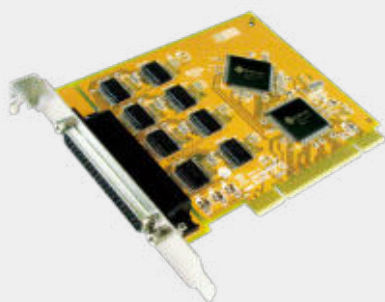

Features




- High-speed serial port supports baud rates up to 921.6 Kbps
- High-tech 128K FIFO can reduce CPU loading, interrupting, and improving system performance dramatically
- Plug and play, I/O address and IRQ assigned by BIOS
- Works with various types of DB9M / DB25M serial devices
- Fully compliant with PCI Spec. Ver2.2 standard
- Supports both 64-bit & 32-bit PCI Bus and 3.3V & 5V connector keys
- Ready for the Intel® Itanium® and AMD® Athlon® 64R 64-bit CPU on the Microsoft Windows® XP 64-bit Edition Version 2003 and Windows® Sever 2003 for 64-bit Itanium based or Extended Systems
- Ideal for 56K V.90 external modems, ISDN terminal adapters, PDA, UPS, barcode scanners and other high speed serial port devices
- Supports Microsoft Windows 2000, XP, and Linux

Specifications

	IC-108S
Mode of Operation	Hand-shaking Mode
Bus Transceivers	RS-232 Full-duplex
Drivers per Line	RS-232 1 Driver
Receivers per Line	RS-232 1 Receiver
Hardware	
Controller	UART (16C650 compatible)
Bus Interface	64-bit & 32-bit PCI Bus - 3.3V & 5V Connector Keys
Connector	1 DB37 Female port and 1 pin header to 8 port DB9 Male or DB25 Male
Communication	
IRQ & I/O Address	Assigned by BIOS
FIFO	32 bytes hardware FIFO, 128 Kbytes software FIFO
Baud Rate	75bps ~ 921.6Kbps
Data Bit	4, 5, 6, 7, 8
Stop Bit	1, 1.5, 2
Parity	even, odd, none, mark, space
Flow Control	None, Xon / Xoff, Hardware
Signals	DCD, RxD, TxD, DTR, GND, DSR, RTS, CTS, RI
Driver Supported	
64-bit System	Intel Itanium and AMD Athlon64 CPU
Microsoft	Windows 2000 / XP
Linux	2.0.x / 2.2.x / 2.4.18 / 2.4.20
DOS	DOS
Environmental	
Operating Temperature	0 – 57°C
Storage Temperature	-20 – 85°C
Humidity	5 – 95% RH
Carton Lot	20 pcs
Included Accessories	2x DB 37 pin to 4 port DB 9 cables; 1x Accessory cable; 1x Software CD

Reference








Cables

Images	Part No.	Interface	To PC / Source Interface	To Switch Interface	Compatible Products
	2L-1001P/C (1.8 m) 2L-1003P/C (3 m) 2L-1005P/C (5 m) 2L-1006P/C (6 m) 2L-1010P/C (10 m) 2L-1020P/C (20 m)	PS/2 Standard VGA	 6 pin mini-DIN Male	 6 pin mini-DIN Male	CS82A, CS84A
	2L-5001P/C (1.2 m) 2L-5002P/C (1.8 m) 2L-5003P/C (3 m) 2L-5005P/C (5 m)	PS/2 Slim VGA	 HDB-15 Male	 6 pin mini-DIN Male  HDB-15 Female	
	2L-1001P (1.8 m) 2L-1003P (3 m) 2L-1005P (5 m) 2L-1010P (10 m) 2L-1020P (20 m) 2L-1030P (30 m) 2L-1040P (40 m)	PS/2 VGA	 6 pin mini-DIN Male  HDB-15 Male	 6 pin mini-DIN Female  6 pin mini-DIN Female  HDB-15 Female	For PS/2 console extension
	2L-5502UP (1.8 m) 2L-5503UP (3 m) 2L-5506UP (6 m)	USB VGA	 USB Type A Male  HDB-15 Male	 6 pin mini-DIN Male  6 pin mini-DIN Male  HDB-15 Female	CS82A, CS84A
	2L-5201P (1.2 m) 2L-5202P (1.8 m) 2L-5203P (3 m) 2L-5206P (6 m) 2L-5210P (10 m)	PS/2 VGA	 6 pin mini-DIN Male  HDB-15 Male	 SPHD Male	CE250A, CL1000, CL1008, CL1016, CL1308, CL1316, CL3000, CL3108, CL3116, CL5708, CL5716, CL5800, CL5808, CL5816, CL5708i, CL5716i, CN8000A, CS74E, CS231, CS1308, CS1316, CS1708A, CS1716A, CS1708i, CS1716i
	2L-5202UP (1.8 m) 2L-5203UP (3 m) 2L-5205UP (5 m) 2L-5206UP (6 m)	USB VGA	 USB Type A Male  HDB-15 Male	 SPHD Male	CE250A, CE350, CE370, CL1000, CL1008, CL1016, CS74E, CS231
	With built-in PS/2 to USB Converter				
	2L-5203A (3 m) 2L-5205A (5 m)	VGA Audio	 2 Audio Plugs  HDB-15 Male	 SPHD Female	CS1742, CS1744



























































About SPHD Connectors:





Many of our KVM switches use SPHD connectors for their KVM and/or console ports. We have specifically modified the shape of these connectors so that only KVM cables that we have designed to work with the KVM switch can be connected.

Images	Part No.	Interface	To PC / Source Interface		To Switch Interface	Compatible Products
	2L-5301UP (1.2 m) 2L-5302UP (1.8 m) 2L-5303UP (3 m)	USB PS/2 VGA	USB Type A Male 6 pin mini-DIN Male	HDB-15 Male 6 pin mini-DIN Male	SPHD Male	CN8000A, CS82U, CS84U, CL5808, CL5816, CS1308, CS1316,
	2L-1701P (1.8 m) 2L-1703P (3 m) 2L-1705P (5 m) 2L-1710P (10 m)	PS/2 VGA Audio	6 pin mini-DIN Male 2 Audio Plugs	6 pin mini-DIN Male HDB-15 Male	DB-25 Male	CS228, CS428
	2L-5003U (3 m)	USB VGA	USB Type A Male	HDB-15 Male	USB Type B Male HDB-15 Female	CE700, CS102U, CS104U
	2L-5301U (1.2 m) 2L-5302U (1.8 m) 2L-5303U (3 m) 2L-5305U (5 m)	USB VGA Audio	USB Type A Male 2 Audio Plugs	HDB-15 Male 2 Audio Plugs	SPHD Male 2 Audio Plugs	CE750A, CE770, CE774, CE775, CE800B, CL3100, CS1732B, CS1734B, CS1732A, CS1734A, CS1754, CS1758
	2L-5301P (1.2 m) 2L-5302P (1.8 m) 2L-5303P (3 m) 2L-5305P (5 m)	PS/2 VGA Audio	6 pin mini-DIN Male 2 Audio Plugs	6 pin mini-DIN Male HDB-15 Male	SPHD Male 2 Audio Plugs	CE350, CE370, CS1732A, CS1734A, CS1732B, CS1734B, CS1754, CS1758
	2L-5201U (1.2 m) 2L-5202U (1.8 m) 2L-5203U (3 m) 2L-5205U (5 m)	USB VGA	USB Type A Male	HDB-15 Male	SPHD Male	CE700A, CL1308, CL1316, CL3000, CL3100, CL3108, CL3116, CL5708, CL5716, CL5800, CL5808, CL5816, CL5708i, CL5716i, CN8000A, CS72U, CS74U, CS82U, CS84U, CS231, CS1308, CS1316, CS1708A, CS1716A, CS1708i, CS1716i, CS1742, CS1744
	2L-7D01H (1 m) 2L-7D02H-1 (2m) 2L-7D03H (3 m) 2L-7D05H (5 m) 2L-7D05H-1 (5 m) 2L-7D10H (10 m) 2L-7D15H (15 m) 2L-7D20H (20 m)	HDMI	HDMI	HDMI	HDMI	CS1822, CS1824, CS1842, CS1844, CS19208, CS19216, CS18208, CS18216

Cables

Images	Part No.	Interface	To PC / Source Interface	To Switch Interface	Compatible Products
	2L-7D02U (1.8 m) 2L-7D03U (3 m) 2L-7D05U (5 m)	USB DVI-D Audio	  	  	CE600, CE602, CE604, CE610A, CE620, CE680, CE611, CE624, CE690, CL3800, CL6700MW, CL6708MW, CM1164A, CN8600, CN9600 CS1642A, CS1644A, CS1762A, CS1764A CS1768, CS1788, CS1782A, CS1784A, CS261
	2L-7D02UI (1.8 m) 2L-7D03UI (3 m)	USB DVI-I Audio	  	  	CL6708MW, CS1642A, CS1644A CS1762A, CS1764A, CS1768, CS1782A, CS1784A, CS1788
	2L-7D02UD (1.8 m) 2L-7D03UD (3 m) 2L-7D05UD (5 m)	USB DVI-D Dual Link Audio	  	  	CE602, CS1642A, CS1644A, CS1782A, CS1784A, CS1788, CN9600
	2L-7D03DD (3 m) 2L-7D05DD (5 m)	DVI-D Dual Link	 	 	CS1642A, CS1644A
	2L-7DX2U (1.8 m) 2L-7DX3U (3 m)	USB VGA Audio	  	  	CL6708MW, CS1642A, CS1644A, CS1762A, CS1768, CS1788, CS1782A, CS1784A
	2L-7D02DH (1.8 m)	USB HDMI Audio	  	  	CE600, CE602, CE604 CE610A, CE620, CE624, CE680, CE690, CL3800, CL6700MW, CL6708MW, CM1164A, CN8600, CN9600 CS1642A, CS1644A, CS1762A, CS1764A CS1768, CS1788, CS1782A, CS1784A, CS261
	2L-7D02UH (1.8 m)	USB HDMI Audio	  	  	CE820, CL3700, CL3800, CL3884NW, CL6700MW, CS1792, CS1794, CS1798, CS17916, CS1842, CS1844, CM1284
	2L-7D02DP (2 m) 2L-7D03DP (3 m) 2L-7D03DP-1 (3 m) 2L-7D04DP (4.6 m)	DisplayPort	 	 	CE920, CS1922, CS1924, CS1922M, CS1924M, CS1942DP, CS1944DP, CS1964, CS19208, CS19216
	2L-1700 (0.6 m) 2L-1701 (1.8 m) 2L-1703 (3 m) 2L-1705 (5 m) 2L-1715 (15 m)	Daisy-Chain Cable	 	 	CS1708A, CS1716A, CS1708I, CS1716I, CL1008, CL1016, CL5708, CL5716, CL5808, CL5816, CL5708I, CL5716I
	2L-2801 Low Skew Cable	RJ-45	 	 	CE100, CE250A, CE350, CE370, CE600, CE602, CE604, CE700A, CE750A, CE770, CE774, CE775, CE800B
	2L-2910 HDBaseT Cat 6 Cable	RJ-45	 	 	All ATEN HDBT products

Accessories

Images	Part No.	Product Name	Compatible Products
	2XRT-0003G	IR Extender Cable	CM1164A, CM1284
	2X-EA12	LockPro - HDMI Cable Lock	CL3700, CL3800, CL3884NW, CS19208, CS19216, CS18208, CS18216, CS1798, CS17916, CS1842, CS1844, CE820
	2A-127G	DVI to HDMI Adapter	Compatible with most models equipped with DVI interface
	2A-128G	HDMI to DVI Adapter	Compatible with most models equipped with HDMI interface

Product Compatibility List

KVM	Expansion	
	Connection	Compatible KVMs
CL1308	Cascade	CS1308, CS1316, CS1732B, CS1734B
CL1316	Cascade	CS1308, CS1316, CS1732B, CS1734B
CL3108	Cascade	CS1308, CS1316, CS1708A, CS1716A
CL3116	Cascade	CS1308, CS1316, CS1708A, CS1716A
CL3884NW	Cascade	CM1164A, CM1284
CL6708	Cascade	CS1768
CS1308	Cascade	CS1308, CS1316, CS1754, CS1758
CS1316	Cascade	CS1308, CS1316, CS1754, CS1758
CS1754	Cascade	CS1754, CS1758
CS1758	Cascade	CS1754, CS1758
CS1768	Cascade	CS1768, CS1788
CS1788	Cascade	CS1768, CS1788
CS1798	Cascade	CS1798, CS17916
CS17916	Cascade	CS1798, CS17916
CS19208	Cascade	CS19208, CS19216
CS19216	Cascade	CS19208, CS19216
CS18208	Cascade	CS18208
CS18216	Cascade	CS18216
CL1008	Daisy-Chain	CS1708A, CS1716A
CL1016	Daisy-Chain	CS1708A, CS1716A
CL5708	Daisy-Chain	CS1708A, CS1716A
CL5716	Daisy-Chain	CS1708A, CS1716A
CL5808	Daisy-Chain	CS1708A, CS1716A
CL5816	Daisy-Chain	CS1708A, CS1716A
CL5708i	Daisy-Chain	CS1708A, CS1716A
CL5716i	Daisy-Chain	CS1708A, CS1716A
CS1708A	Daisy-Chain	CS1708A, CS1716A, CS1708i, CS1716i
CS1716A	Daisy-Chain	CS1708A, CS1716A, CS1708i, CS1716i
CM1164A	Cascade, Daisy-Chain	CM1164A, CM1284
CM1284	Cascade, Daisy-Chain	CM1164A, CM1284

Hotkeys

Models	Hotkey Mode (Invoke Hotkeys)	Port Selection	Invoke OSD
CL3100, CL3108, CL3116, CL3700, CL3800, CL3884NW, CL5708, CL5716, CL5708I, CL5716I, CL5808, CL5816, CL6708MW, CM1164A, CM1284, CS1308, CS1316, CS1708A, CS1716A, CS1708i, CS1716i, CS1754, CS1758, CS1768, CS1788, CS1798, CS17916, CS19208, CS19216, CS18208, CS18216	Default:   or Alternate:  	Default:   (n)  or Alternate:   (n) 	Default:   or Alternate:  
CL1008, CL1016	Default:  	Default:   (n) 	Default:   or Alternate:  
CS52A, CS682, CS692, CS72D, CS782DP	Default:   or Alternate:  	Default:    or Alternate:   	—
CS62A, CS62S	—	 	—
CS64A	 	  (n)	—
CS62U, CS62US	Default:   or Alternate:  	Default:   Alternate:  	—
CS1642A, CS1644A, CS1732A, CS1734A, CS1742, CS1744, CS1762A, CS1764A, CS1782A, CS1784A, CS1792, CS1794, CS1822, CS1824, CS1842, CS1844, CS1912, CS1914, CS1922, CS1924, CS1922M, CS1924M, CS1942DP, CS1944DP, CS1953, CS1964, CS231, CS261, CS62KM, CS64U, CS64US, CS724KM, CS82U, CS84U	Default:   or Alternate:  	Default: 1.    2.   (n)  or Alternate: 1.    2.   (n) 	—

Hotkeys

Models	Hotkey Mode (Invoke Hotkeys)	Port Selection	Invoke OSD
CS1732B, CS1734B	Default: Num Lock - or Alternate: Ctrl F12	Default: Num Lock - (n) Enter Num Lock - ← ; Num Lock - → Num Lock - ↑ ; Num Lock - ↓ or Alternate: Ctrl F12 (n) Enter Ctrl F12 ← ; Ctrl F12 → Ctrl F12 ↑ ; Ctrl F12 ↓	Default: Scroll Lock Scroll Lock or Alternate: Ctrl Ctrl
CS82A	—	Default: Scroll Lock Scroll Lock or Alternate: Ctrl Ctrl	—
CS84A	—	Ctrl Shift Alt (n) Enter	—
CS74E	—	Scroll Lock Scroll Lock ↓ ; Scroll Lock Scroll Lock ↑ ; Scroll Lock Scroll Lock fn	—

Legend:

(n): The n stands for the computer's Port ID number (1, 2, 3, 4...).

Fn: Where Fn represents a function key (from [F1] to [F4]) that corresponds to the KVM port (1 to 4).

← previous port;

→ next port;

↑ last accessible port;

↓ first accessible port

Hotkeys

Our KVM switches provide an extensive, easy-to-use, hotkey function that makes it convenient to access, control, and configure your KVM installation from the keyboard. They offer the simplest way to access the connected computers.

Hotkey Mode

All hotkey operations begin with invoking Hotkey Mode. The invocation sequence depends on the product and the user's preference. In each case, there is a factory default sequence and an alternate sequence that the user can select instead. The Hotkey invocation sequence for each product is shown in the table. The default sequence is given first and appears in bold text.

Port Selection

Hotkey port switching simply involves pressing the appropriate hotkey sequence. In some cases, simply invoking Hotkey Mode cycles you through the available ports; in others, the sequence involves specifying the port ID that the computer you want to access is connected to; while in still other cases, it involves pressing one of the arrow keys.

SOHO and SMB Solutions



Simply Better Connections

Corporate Headquarters

ATEN International Co., Ltd.
3F, No.125, Sec. 2, Datung Rd., Sijhih District,
New Taipei City 221, Taiwan
Phone: +886-2-8692-6789 Fax: +886-2-8692-6767
<https://www.aten.com/global/en/>
E-mail: marketing@aten.com

America Region:

ATEN Technology Inc.
15365 Barranca Parkway, Irvine, CA 92618, U.S.A.
Phone: +1-949-428-1111 Fax: +1-949-428-1100
<https://www.aten.com/us/en/>
E-mail: sales@aten-usa.com

EMEA Region:

ATEN Infotech N.V.
Mijnwerkerslaan 34, 3550 Heusden-Zolder, Belgium
Phone: +32-11-53-15-43 Fax: +32-11-53-15-44
<https://www.aten.com/eu/en/>
E-mail: sales@aten.be

ATEN U.K. Limited
466 Malton Avenue, Slough SL1 4QU, U. K.
Phone: +44-1753-539-121 Fax: +44-1753-215-253
<https://www.aten.com/gb/en/>
E-mail: sales@aten.co.uk

ATEN Poland Sp. z o. o.
2 Gottlieb Daimler Street 02-460 Warsaw, Poland
Phone: +48-514-120-220
<https://www.aten.com/pl/pl/>
E-mail: poland@aten.com

ATEN Romania S.R.L.
10 Bucuresti-Nord Road, Global City Business Park,
Building O 13, 6th floor, Voluntari, Ilfov County, Romania
Phone: +40-314-257-746
<https://www.aten.com>
E-mail: romania@aten.com

ATEN Russia Rep. Office
Zolotaya Ulitsa, 11, Moscow, Russia Federation, 105094
BC "ZOLOTO" Office 1A12
Phone: +7-495-134-2808
<https://www.aten.com/ru/ru/>
E-mail: russia@aten.com

ATEN Info Iletisim Ltd.

Beştepe Mah.Yaşam Cad.,
Neorama Is Merkezi 13-A / 76
Yenimahalle Ankara, Turkey
Phone: +90-312-284-0027
<https://www.aten.com>
E-mail: turkey@aten.com

Oceania Region:

ATEN ANZ Pty Ltd.
Suite 2, Level 1, Tower 2,
394 Lane Cove Road, Macquarie Park,
NSW 2113, Australia
Phone: +61-2-9114-9933 Fax: +61-2-8072-3723
<https://www.aten.com/au/en/>
E-mail: sales@au.aten.com

Asia Pacific Region:

ATEN China Co., Ltd.
Beijing Headquarters
18/F, Tower A, Horizon International Tower, No.6,
Zhichun Road, Haidian District, Beijing, China 100088
Phone: +86-10-5225-0110 Fax: +86-10-8296-1318
<https://www.aten.com/cn/zh/>
E-mail: sales@aten.com.cn

Shanghai Branch
18E, Shanghai Industrial Investment Building, No. 18
Cao Xi Bei Road, Xuhui District,
Shanghai 200030, China
Phone: +86-21-3126-0110 Fax: +86-21-3126-0110-310
<https://www.aten.com/cn/zh/>
E-mail: sales@aten.com.cn

Guangzhou Branch
Room 3913, Ren-Feng Building, No. 490
Tian He Road, Tian He District, Guangzhou 510620, China
Phone: +86-20-3883-0110 Fax: +86-20-3835-0810
<https://www.aten.com/cn/zh/>
E-mail: sales@aten.com.cn

ATEN Japan Co., Ltd.

Tokyo Headquarters
ATEN Bldg. 8-4, Minami-senju 3-chome,
Arakawa-ku, Tokyo 116-0003, Japan
Phone: +81-3-5615-5810 Fax: +81-3-3891-3810
<https://www.aten.com/jp/ja/>
E-mail: sales@atenjapan.jp

Osaka Branch
Awajimachi Dai-Building 3F
3-1-9, Awajimachi, Chuo-ku, Osaka-shi, 541-0047, Japan
Phone: +81-6-6229-5810 Fax: +81-6-6229-8810
<https://www.aten.com/jp/ja/>
E-mail: sales@atenjapan.jp

Kyushu Office

Hakataekimaefujii Building 2F, 3-10-24 Hakataeki Mae Hakata-ku,
Fukuoka-shi, Fukuoka-ken 812-0011, Japan
Phone: +81-92-476-5810 Fax: +81-92-476-5811
<https://www.aten.com/jp/ja/>
E-mail: sales@atenjapan.jp

Nagoya office

Nishiki Maruemu Building 3F, 3-1-30, Nishiki, Naka Ku,
Nagoya Shi, Aichi Ken, 460-0003, Japan
Phone: +81-52-201-5810 Fax: +81-52-201-5811
<https://www.aten.com/jp/ja/>
E-mail: sales@atenjapan.jp

ATEN Korea Co., Ltd.

Seoul Headquarters
B-303, 32, Digma-Pro 9-gil,
Geumcheon-gu, Seoul 08512, Korea
Phone: +82-2-467-6789 Fax: +82-2-467-9876
<https://www.aten.com/kr/ko/>
E-mail: sales@aten.co.kr

Busan Branch

1111, 99, Centum dong-ro, Haeundae-gu, Busan 48059, Korea
Phone: +82-51-782-7156 Fax: +82-51-782-7157
<https://www.aten.com/kr/ko/>
E-mail: roy@aten.co.kr

Atech Peripherals, Inc.

New Taipei Headquarters
6F, No.133, Sec. 2, Datung Rd., Sijhih District,
New Taipei City 221, Taiwan
Phone: +886-2-8692-6969 Fax: +886-2-8692-6926
<https://www.aten.com/tw/zh/>
E-mail: taiwan@aten.com

Atech Kaohsiung Office

37F-1A, No. 38, Xinguang Rd., Lingya Dist.,
Kaohsiung City 802, Taiwan
Phone: +886-7-286-8188 Fax: +886-7-286-8199
<https://www.aten.com/tw/zh/>
E-mail: taiwan@aten.com

ATEN Advance Pvt. Ltd.

2nd Floor, 67, Sudev Complex, Kariappa Road, Basavanagudi,
Bengaluru- 560004, Karnataka, India
Phone: +91-80-4851-7231
<https://www.aten.com>
E-mail: sales@aten.co.in

